


2024/06/04 0512Z

KFMY RSW KTMB

95.52 nm / 176.90 km

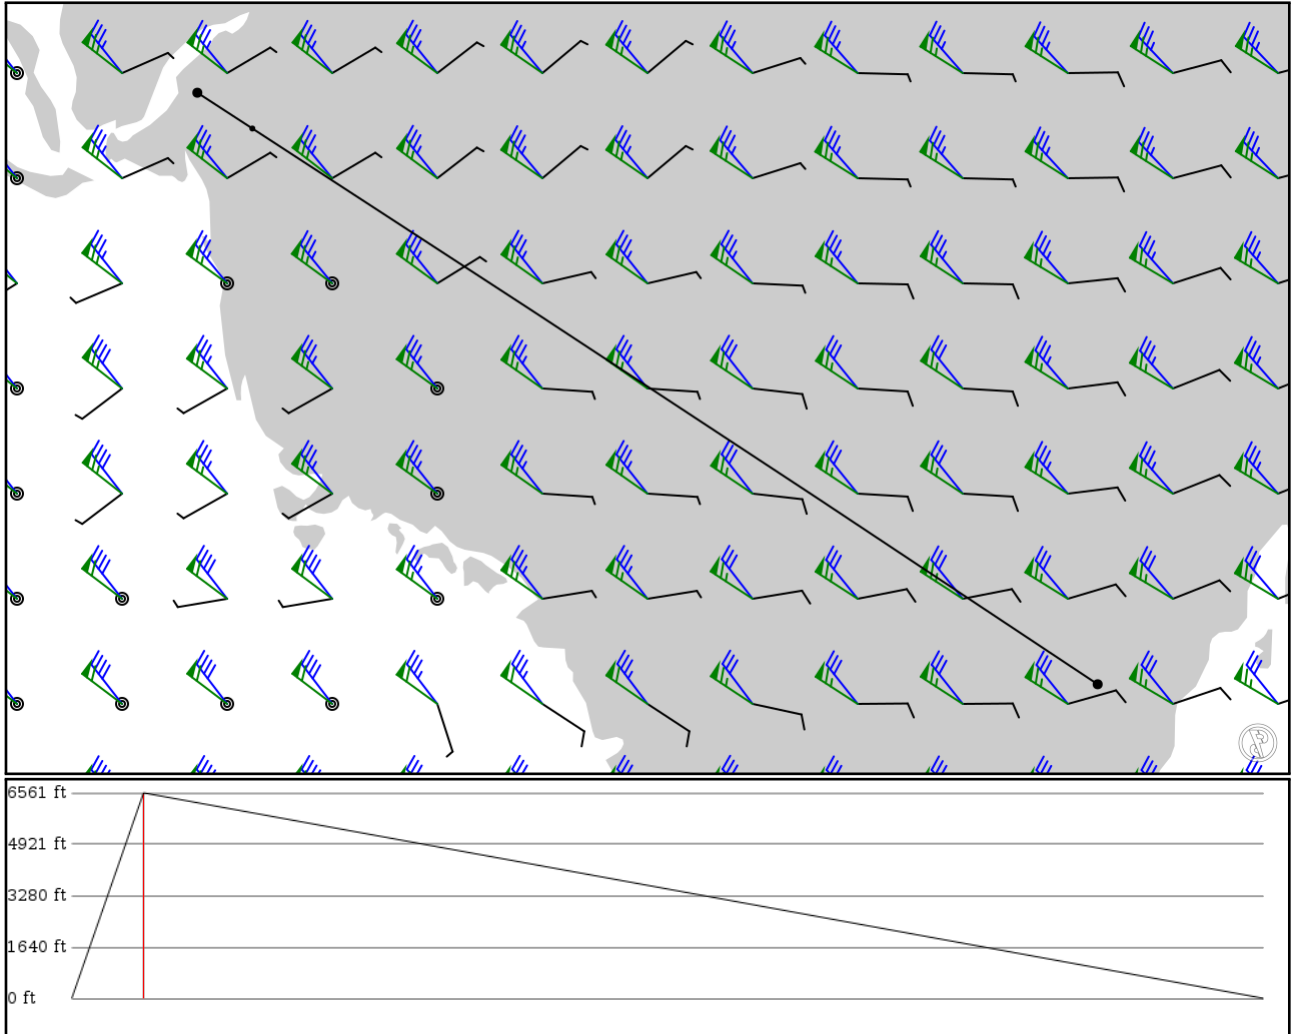

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFMY	-	26.58670	0 ft	-	Page Fld
APT	-	-81.86320	0 m		
RSW	-	26.52990	2,000 ft	5	LEE COUNTY (FORT MYERS)
VOR	-	-81.77580	610 m		
KTMB	-	25.64780	0 ft	89	Miami Executive Airport
APT	-	-80.43350	0 m		

KFMY

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 17 ft / 5 m
Location: 26.586700 -81.863200
Magnetic Var: 6.443 W

METAR

KFMY 040453Z AUTO 11007KT 10SM OVC120 26/20 A2993 RMK A02 SLP136 T02560200 403440228

TAF

KFMY 032340Z 0400/0424 07006KT P6SM VCSH SCT035 BKN080 FM040200 08004KT P6SM SCT080 BKN250 FM041500 09007KT P6SM

Frequencies

REC - 123.72 MHz - ATIS
GND - 121.70 MHz -
APP - 126.80 MHz - FORT MYERS APP/DEP
COM - 119.00 MHz - CTAF
TWR - 119.00 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	150 ft	6,413 ft	47.71	ASPHALT	459 ft	0 ft
	46 m	1,955 m	54.15		140 m	0 m
23	150 ft	6,413 ft	227.71	ASPHALT	400 ft	102 ft
	46 m	1,955 m	234.16		122 m	31 m
13	150 ft	4,915 ft	130.63	ASPHALT	614 ft	98 ft
	46 m	1,498 m	137.07		187 m	30 m
31	150 ft	4,915 ft	310.64	ASPHALT	0 ft	0 ft
	46 m	1,498 m	317.08		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	IFMY	110.70 MHz	18 nm	47.71	-	16 ft
				33 km	54.15		16 m
05	GS	IFMY	110.70 MHz	10 nm	48.42	3.00	14 ft
				19 km	54.86		14 m

KTMB

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 8 ft / 2 m
Location: 25.647800 -80.433500
Magnetic Var: 7.177 W

METAR

KTMB 040453Z AUTO 00000KT 10SM CLR 23/20 A2992 RMK A02 SLP131 T02330200 403170233 \$

TAF

TAF AMD KTMB 040244Z 0403/0424 VRB02KT P6SM FEW025 SCT250 FM041500 09008KT P6SM VCTS SCT025CB BKN050

Frequencies

REC - 124.00 MHz - ATIS
CLD - 133.00 MHz - CLNC DEL
TWR - 134.60 MHz -
COM - 118.90 MHz - CTAF
GND - 121.70 MHz -
APP - 125.50 MHz - MIAMI APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	150 ft	5,008 ft	87.28	ASPHALT	0 ft	0 ft
	46 m	1,526 m	94.46		0 m	0 m
27R	150 ft	5,008 ft	267.29	ASPHALT	0 ft	0 ft
	46 m	1,526 m	274.46		0 m	0 m
09R	150 ft	6,006 ft	87.33	ASPHALT	0 ft	184 ft
	46 m	1,831 m	94.51		0 m	56 m
27L	150 ft	6,006 ft	267.34	ASPHALT	0 ft	0 ft
	46 m	1,831 m	274.52		0 m	0 m
13	150 ft	4,005 ft	127.50	ASPHALT	0 ft	0 ft
	46 m	1,221 m	134.68		0 m	0 m
31	150 ft	4,005 ft	307.50	ASPHALT	0 ft	0 ft
	46 m	1,221 m	314.68		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	LOC-ILS	ITMB	108.70 MHz	18 nm	87.33	-	8 ft
				33 km	94.51		8 m
09R	GS	ITMB	108.70 MHz	10 nm	87.33	3.00	6 ft
				19 km	94.51		6 m