

OERK

King Khalid Intl


OIIE

Imam Khomeini-Tehran Intl

2024/05/23 0824Z

OERK MGA **P891** KUNRU DEBTI SESRA DESLU **B417** EGVEL OIIE

683.17 nm / 1265.24 km

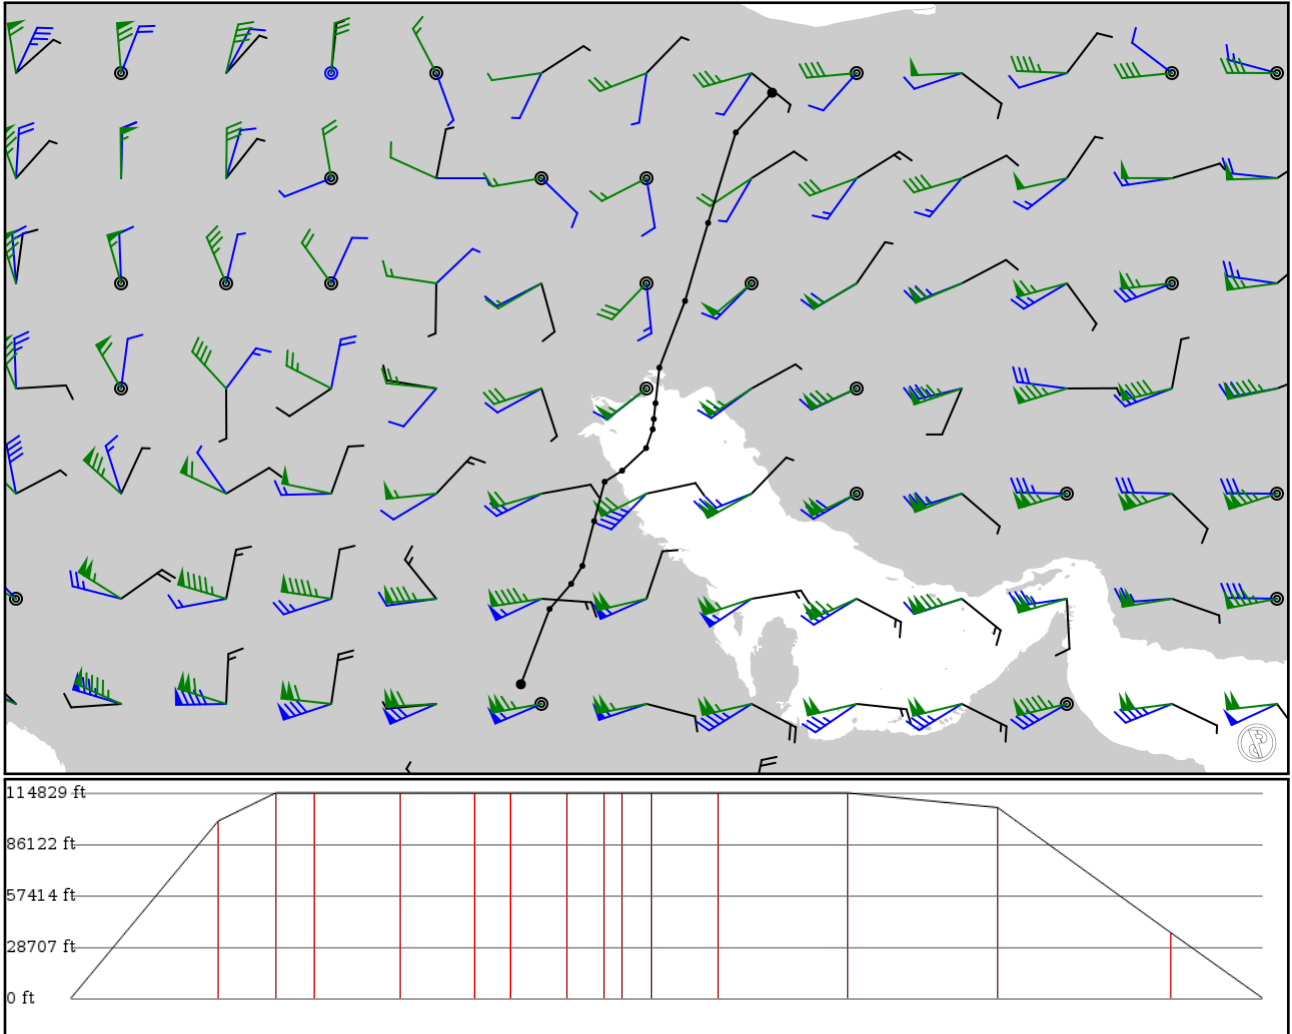

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OERK APT	-	24.95740 46.69880	0 ft 0 m	-	King Khalid Intl
MGA VOR	-	26.28890 47.20690	30,200 ft 9,205 m	84	MAGALA
KUTEM FIX	P891 AWY-HI	26.73310 47.58920	35,000 ft 10,668 m	33	-
EGNOV FIX	P891 AWY-HI	27.05030 47.78690	35,000 ft 10,668 m	21	-
EMILU FIX	P891 AWY-HI	27.84190 47.99530	35,000 ft 10,668 m	48	-
KUNRU FIX	P891 AWY-HI	28.53890 48.18060	35,000 ft 10,668 m	42	-
DEBTI FIX	-	28.73530 48.49030	35,000 ft 10,668 m	20	-
SESRA FIX	-	29.13420 48.91470	35,000 ft 10,668 m	32	-
DESLU FIX	-	29.46670 49.03060	35,000 ft 10,668 m	20	-
TULAX FIX	B417 AWY-HI	29.64810 49.05030	35,000 ft 10,668 m	10	-
UKNAR FIX	B417 AWY-HI	29.92720 49.08060	35,000 ft 10,668 m	16	-
MAH VOR	B417 AWY-HI	30.55630 49.14940	35,000 ft 10,668 m	37	BANDAR MAHSHAHR
IMKEN FIX	B417 AWY-HI	31.73530 49.60310	35,000 ft 10,668 m	74	-
UKITA FIX	B417 AWY-HI	33.11580 50.01140	32,500 ft 9,906 m	85	-
EGVEL FIX	B417 AWY-HI	34.71610 50.50140	11,200 ft 3,414 m	99	-
OIEE APT	-	35.41850 51.14350	0 ft 0 m	52	Imam Khomeini-Tehran Intl

OERK

```
Region: SAUDI ARABIA
Timezone: ASIA/RIYADH
Runways: 2
```

Elevation: 2,048 ft / 624 m
Location: 24.957400 46.698800
Magnetic Var: 3.354 E

METAR

OERK 230800Z 02007KT CAVOK 39/M02 Q1011 NOSIG

TAF

TAF OERK 230500Z 2306/2412 03016KT 7000 NSC PROB30 TEMPO 2306/2314 3000 BLDU BECMG 2316/2318 33006KT BECMG 2402/2406 03016KT 7000 NSC

Frequencies

REC - 113.30 MHz - ATIS	CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.70 MHz - GROUND	GND - 121.60 MHz - GROUND
TWR - 118.60 MHz - TOWER	TWR - 118.80 MHz - TOWER
APP - 124.10 MHz - RIYADH APPROACH	APP - 120.00 MHz - RIYADH APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	197 ft	13,809 ft	150.17	CONCRETE	0 ft	387 ft
	60 m	4,209 m	146.81		0 m	118 m
33L	197 ft	13,809 ft	330.18	CONCRETE	0 ft	384 ft
	60 m	4,209 m	326.82		0 m	117 m
15L	197 ft	13,809 ft	150.18	CONCRETE	0 ft	390 ft
	60 m	4,209 m	146.83		0 m	119 m
33R	197 ft	13,809 ft	330.19	CONCRETE	0 ft	390 ft
	60 m	4,209 m	326.83		0 m	119 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15L	DME	IELF	109.50 MHz	18 nm	-	-	2,049 ft
				33 km	-		2,049 m
15R	DME	ITIH	110.50 MHz	18 nm	-	-	2,047 ft
				33 km	-		2,047 m
33L	DME	IFAT	110.10 MHz	18 nm	-	-	2,023 ft
				33 km	-		2,023 m
33R	DME	IKIA	109.10 MHz	18 nm	-	-	2,049 ft
				33 km	-		2,049 m
15L	LOC-ILS	IELF	109.50 MHz	18 nm	150.18	-	2,049 ft
				33 km	146.82		2,049 m
15R	LOC-ILS	ITIH	110.50 MHz	18 nm	150.17	-	2,046 ft
				33 km	146.82		2,046 m
33L	LOC-ILS	IFAT	110.10 MHz	18 nm	330.16	-	2,049 ft
				33 km	326.81		2,049 m
33R	LOC-ILS	IKIA	109.10 MHz	18 nm	330.18	-	2,049 ft
				33 km	326.82		2,049 m
15L	GS	IELF	109.50 MHz	10 nm	150.35	3.00	2,033 ft
				19 km	147.00		2,033 m
15R	GS	ITIH	110.50 MHz	10 nm	150.33	3.00	2,047 ft
				19 km	146.98		2,047 m
33L	GS	IFAT	110.10 MHz	10 nm	330.33	3.00	2,023 ft
				19 km	326.98		2,023 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
33R	GS	IKIA	109.10 MHz	10 nm	330.35	3.00	2,023 ft
				19 km	327.00		2,023 m

OIIE

Region: IRAN
Timezone: ASIA/TEHRAN
Runways: 2

Elevation: 3,305 ft / 1,007 m
Location: 35.418500 51.143500
Magnetic Var: 5.044 E

METAR

OIIE 230800Z 32016KT 9999 FEW035TCU 24/10 Q1013

TAF

TAF OIIE 230530Z 2306/2412 31018KT 6000 NSC TEMPO 2306/2315 32020G30KT 4000 SA NSC BECMG 2403/2405 28008KT 6000 FE

Frequencies

REC - 127.20 MHz - TEHRAN ATIS
GND - 121.60 MHz - TEHRAN GROUND
APP - 119.70 MHz - MEHRABAD APPROACH
GND - 121.82 MHz - TEHRAN GROUND
TWR - 118.70 MHz - IKA TOWER
APP - 125.10 MHz - MEHRABAD APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11R	148 ft	13,439 ft	108.87	CONCRETE	0 ft	1,024 ft
	45 m	4,096 m	103.83		0 m	312 m
29L	148 ft	13,439 ft	288.90	CONCRETE	1,476 ft	0 ft
	45 m	4,096 m	283.85		450 m	0 m
11L	148 ft	13,786 ft	108.87	CONCRETE	0 ft	394 ft
	45 m	4,202 m	103.82		0 m	120 m
29R	148 ft	13,786 ft	288.89	CONCRETE	0 ft	394 ft
	45 m	4,202 m	283.85		0 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
29R	DME	IIKA	110.30 MHz	18 nm	-	-	3,275 ft
				33 km	-		3,275 m
29R	LOC-ILS	IIKA	110.30 MHz	18 nm	288.88	-	3,305 ft
				33 km	283.84		3,305 m
11L	LOC-ILS	IKIA	109.10 MHz	18 nm	108.88	-	3,305 ft
				33 km	103.84		3,305 m
29R	GS	IIKA	110.30 MHz	10 nm	288.88	3.00	3,305 ft
				19 km	283.84		3,305 m
11L	GS	IKIA	109.10 MHz	10 nm	108.88	3.00	3,305 ft
				19 km	103.84		3,305 m