

# KDAN

Danville Rgnl


# KSAV

Savannah Hilton Head Intl

2024/06/04 0706Z

KDAN GLOVR J75 CAE KSAV

288.80 nm / 534.87 km

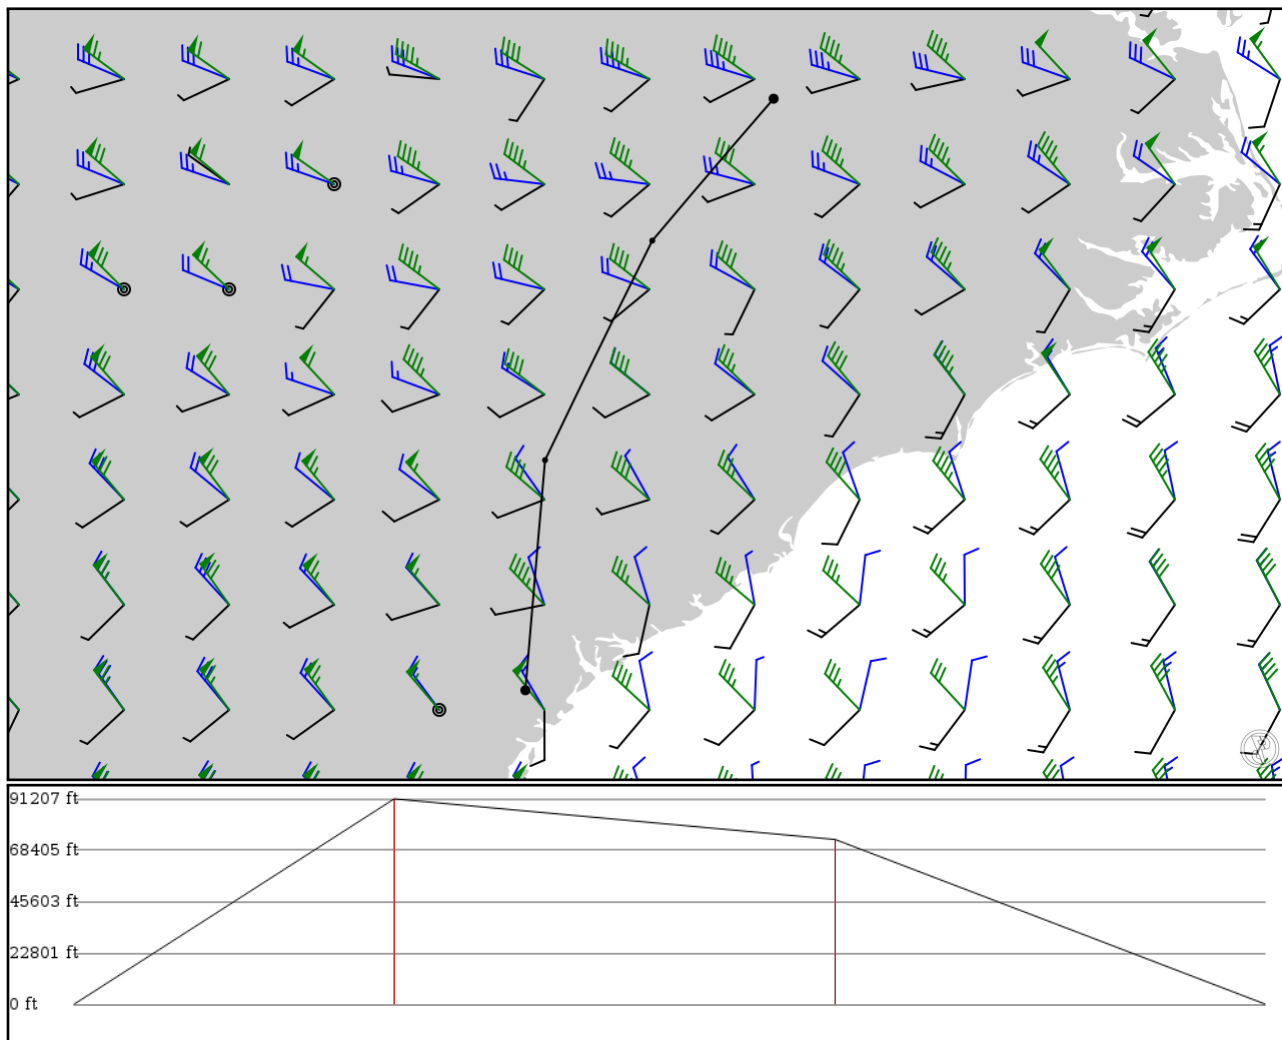

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDAN	-	36.57330	0 ft	-	Danville Rgnl
APT	-	-79.33540	0 m		
GLOVR	-	35.50680	27,800 ft	77	-
FIX	-	-80.24760	8,473 m		
CAE	J75	33.85730	22,300 ft	106	COLUMBIA
VOR	AWY-HI	-81.05390	6,797 m		
KSAV	-	32.12740	0 ft	104	Savannah Hilton Head Intl
APT	-	-81.20190	0 m		

## KDAN

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 2

Elevation: 571 ft / 174 m  
Location: 36.573300 -79.335400  
Magnetic Var: 9.222 W

## METAR

KDAN 040553Z AUTO 00000KT 10SM SCT042 BKN055 21/19 A2994 RMK A02 SLP128 T02060189 10250 20200 58004

## TAF

TAF KDAN 040520Z 0406/0506 00000KT P6SM BKN120 FM041000 00000KT 5SM BR BKN070 TEMPO 0410/0412 2SM BR SCT003 FM0412

## Frequencies

REC - 128.12 MHz - ASOS

COM - 123.05 MHz - CTAF/UNICOM

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13	98 ft	4,022 ft	124.69	ASPHALT	0 ft	889 ft
	30 m	1,226 m	133.92		0 m	271 m
31	98 ft	4,022 ft	304.70	ASPHALT	0 ft	85 ft
	30 m	1,226 m	313.92		0 m	26 m
02	151 ft	6,513 ft	16.25	ASPHALT	177 ft	0 ft
	46 m	1,985 m	25.47		54 m	0 m
20	151 ft	6,513 ft	196.25	ASPHALT	177 ft	0 ft
	46 m	1,985 m	205.47		54 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02	LOC-ILS	IDAN	110.70 MHz	18 nm	16.25	-	533 ft
				33 km	25.47		533 m
02	GS	IDAN	110.70 MHz	10 nm	16.50	3.00	544 ft
				19 km	25.72		544 m

## KSAV

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 2

Elevation: 50 ft / 15 m  
Location: 32.127400 -81.201900  
Magnetic Var: 7.512 W

## METAR

KSAV 040553Z AUTO 17006KT 10SM CLR 23/19 A2995 RMK A02 SLP141 T02280189 10261 20228 58011

## TAF

TAF KSAV 040520Z 0406/0506 18003KT P6SM SCT250 FM041500 19005KT P6SM SCT040 FM041800 15011KT P6SM SCT045 BKN200 FM050000 15011KT P6SM SCT045 BKN200

## Frequencies

REC - 123.75 MHz - ATIS  
COM - 122.95 MHz - UNICOM  
GND - 121.90 MHz -  
APP - 118.40 MHz - APP/DEP  
COM - 119.10 MHz - CTAF  
CLD - 119.55 MHz - CLNC DEL  
TWR - 119.10 MHz -

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	150 ft	9,328 ft	90.61	CONCRETE	0 ft	1,001 ft
	46 m	2,843 m	98.12		0 m	305 m
28	150 ft	9,328 ft	270.62	CONCRETE	0 ft	151 ft
	46 m	2,843 m	278.13		0 m	46 m
01	151 ft	7,016 ft	359.63	CONCRETE	0 ft	200 ft
	46 m	2,138 m	7.14		0 m	61 m
19	151 ft	7,016 ft	179.63	CONCRETE	0 ft	200 ft
	46 m	2,138 m	187.14		0 m	61 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	LOC-ILS	ITPV	111.90 MHz	18 nm	359.63	-	50 ft
				33 km	7.14		50 m
10	LOC-ILS	ISAV	109.90 MHz	18 nm	90.61	-	50 ft
				33 km	98.12		50 m
01	GS	ITPV	111.90 MHz	10 nm	359.63	3.00	50 ft
				19 km	7.14		50 m
10	GS	ISAV	109.90 MHz	10 nm	90.61	3.00	50 ft
				19 km	98.12		50 m