


KLFT
LAFAYETTE RGNL

KATL
Hartsfield Jackson Atlanta Intl

2024/05/16 0708Z

KLFT CAZZZ V194 MCB J22 MEI J239 WEONE KATL

445.46 nm / 824.99 km

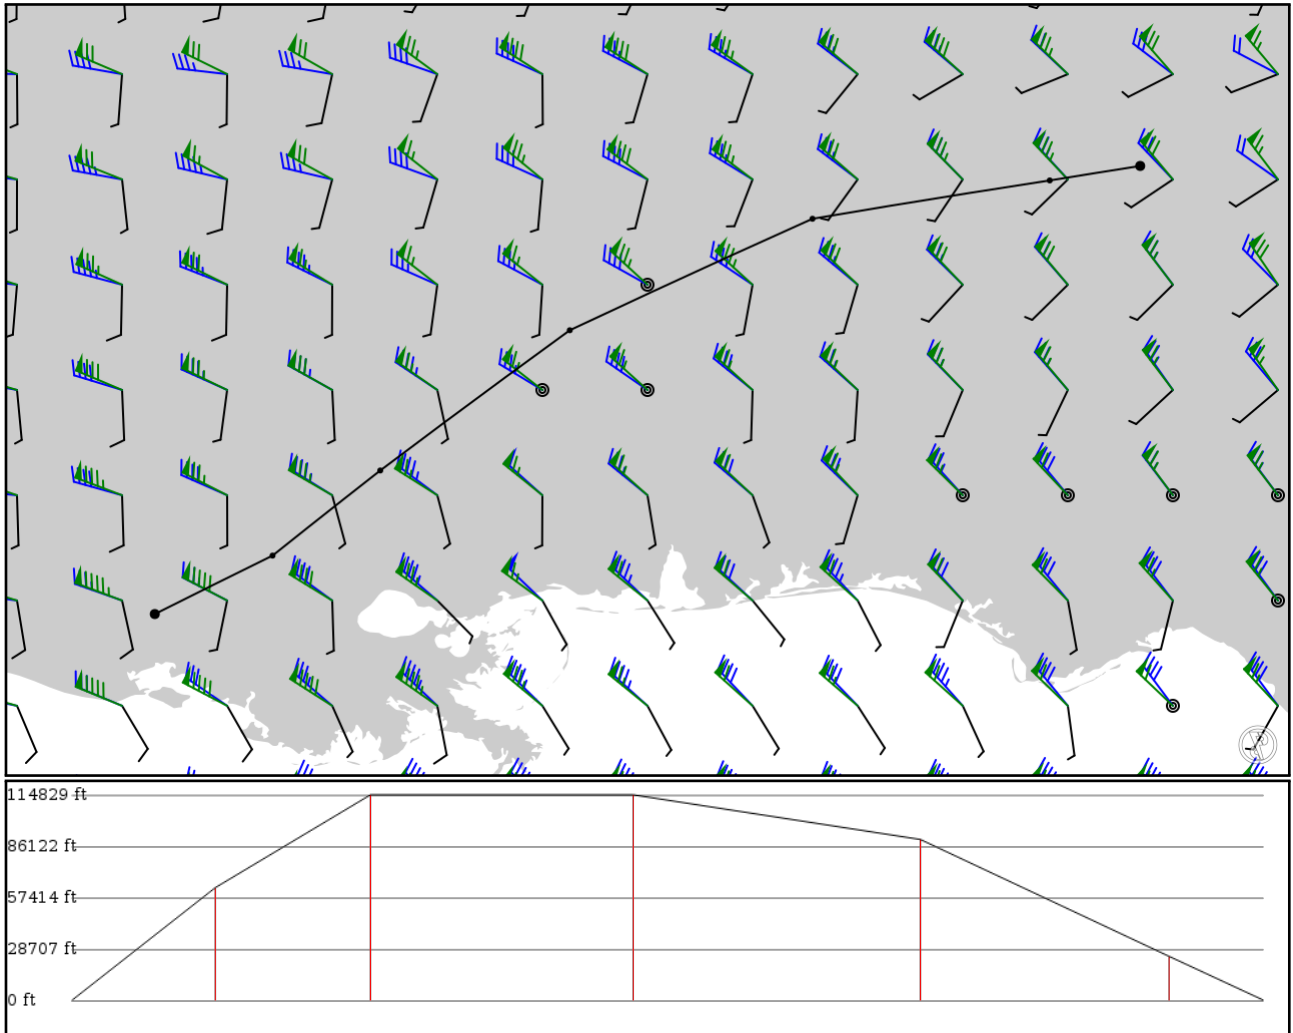

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLFT APT	-	30.20501 -91.98797	0 ft 0 m	-	LAFAYETTE RGNL
CAZZZ FIX	-	30.65268 -91.08449	19,200 ft 5,852 m	53	-
MCB DME	V194 AWY-LO	31.30445 -90.25820	35,000 ft 10,668 m	57	MC COMB VORTAC
MEI VOR	J22 AWY-HI	32.37844 -88.80428	35,000 ft 10,668 m	98	MERIDIAN VORTAC
JAMMR FIX	J239 AWY-HI	33.23214 -86.94232	27,400 ft 8,352 m	107	-
WEONE FIX	J239 AWY-HI	33.52569 -85.12225	7,500 ft 2,286 m	92	-
KATL APT	-	33.63662 -84.42821	0 ft 0 m	35	Hartsfield Jackson Atlanta Intl

KLFT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 42 ft / 13 m
Location: 30.205000 -91.988000
Magnetic Var: 0.361 W

METAR

KLFT 160553Z AUTO 00000KT 10SM CLR 23/18 A2980 RMK A02 SLP092 T02330183 10300 20233 403220194 56007

TAF

TAF KLFT 160520Z 1606/1706 VRB05KT P6SM FEW250 FM161700 14007KT P6SM SCT220 FM162000 14007G15KT P6SM OVC100 FM162

Frequencies

REC - 134.05 MHz - ATIS
COM - 122.95 MHz - UNICOM
GND - 121.80 MHz -
APP - 121.10 MHz - APP/DEP

COM - 118.50 MHz - CTAF
CLD - 125.55 MHz - CLNC DEL
TWR - 118.50 MHz -
APP - 128.70 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	150 ft	8,048 ft	38.60	ASPHALT	0 ft	600 ft
	46 m	2,453 m	38.96		0 m	183 m
22L	150 ft	8,048 ft	218.61	ASPHALT	0 ft	102 ft
	46 m	2,453 m	218.97		0 m	31 m
11	148 ft	5,394 ft	109.70	ASPHALT	0 ft	0 ft
	45 m	1,644 m	110.06		0 m	0 m
29	148 ft	5,394 ft	289.70	ASPHALT	0 ft	0 ft
	45 m	1,644 m	290.06		0 m	0 m
04L	75 ft	4,104 ft	38.63	ASPHALT	0 ft	0 ft
	23 m	1,251 m	38.99		0 m	0 m
22R	75 ft	4,104 ft	218.63	ASPHALT	0 ft	0 ft
	23 m	1,251 m	218.99		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	ITYN	110.90 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
22L	DME	ILFT	109.50 MHz	18 nm	-	-	52 ft
				33 km	-		52 m
04R	LOC-ILS	ITYN	110.90 MHz	18 nm	38.12	-	11 ft
				33 km	38.48		11 m
22L	LOC-ILS	ILFT	109.50 MHz	18 nm	219.11	-	42 ft
				33 km	219.47		42 m
04R	GS	ITYN	110.90 MHz	10 nm	39.21	3.00	35 ft
				19 km	39.57		35 m
22L	GS	ILFT	109.50 MHz	10 nm	219.21	3.00	35 ft
				19 km	219.57		35 m

KATL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 5

Elevation: 1,026 ft / 313 m
Location: 33.636600 -84.428000
Magnetic Var: 5.632 W

METAR

KATL 160552Z 28006KT 10SM FEW034 19/16 A2983 RMK AO2 SLP094 T01940156 10250 20194 51004

TAF

TAF KATL 160538Z 1606/1712 30007KT P6SM FEW040 FM160900 31009KT P6SM FEW015 FM161300 32010KT P6SM SKC FM170000 33008KT

Frequencies

REC - 119.65 MHz - D-ATIS	REC - 125.55 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 121.65 MHz - ATLANTA GROUND	GND - 121.75 MHz - ATLANTA GROUND
GND - 121.90 MHz - ATLANTA GROUND	TWR - 119.10 MHz - ATLANTA TOWER
TWR - 119.30 MHz - ATLANTA TOWER	TWR - 119.50 MHz - ATLANTA TOWER
TWR - 123.85 MHz - ATLANTA TOWER	TWR - 125.32 MHz - ATLANTA TOWER
APP - 127.90 MHz - ATLANTA APPROACH	APP - 128.00 MHz - ATLANTA APPROACH
DEP - 125.65 MHz - ATLANTA DEPARTURE	DEP - 125.70 MHz - ATLANTA DEPARTURE
DEP - 135.37 MHz - ATLANTA DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	12,400 ft	89.99	CONCRETE	0 ft	0 ft
	46 m	3,780 m	95.62		0 m	0 m
27R	151 ft	12,400 ft	270.01	CONCRETE	518 ft	0 ft
	46 m	3,780 m	275.64		158 m	0 m
09R	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
27L	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08L	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
26R	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
10	151 ft	9,008 ft	89.97	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
28	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08R	151 ft	10,009 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	95.61		0 m	0 m
26L	151 ft	10,009 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	3,051 m	275.62		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IHFV	109.30 MHz	18 nm	-	-	993 ft
				33 km	-		993 m
08R	DME	IATL	109.90 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IHZK	110.50 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
09R	DME	IFUN	108.90 MHz	18 nm	-	-	987 ft
				33 km	-		987 m
10	DME	IOMO	111.55 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
26L	DME	IBRU	108.70 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m
26R	DME	IGXZ	110.10 MHz	18 nm	-	-	1,000 ft
				33 km	-		1,000 m
27L	DME	IFSQ	108.50 MHz	18 nm	-	-	1,020 ft
				33 km	-		1,020 m
27R	DME	IAFA	111.30 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
28	DME	IPKU	111.75 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
08L	LOC-ILS	IHFV	109.30 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
08R	LOC-ILS	IATL	109.90 MHz	18 nm	89.99	-	1,026 ft
				33 km	95.62		1,026 m
09L	LOC-ILS	IHZK	110.50 MHz	18 nm	90.01	-	968 ft
				33 km	95.64		968 m
09R	LOC-ILS	IFUN	108.90 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
10	LOC-ILS	IOMO	111.55 MHz	18 nm	89.98	-	970 ft
				33 km	95.61		970 m
26L	LOC-ILS	IBRU	108.70 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
26R	LOC-ILS	IGXZ	110.10 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27L	LOC-ILS	IFSQ	108.50 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27R	LOC-ILS	IAFA	111.30 MHz	18 nm	270.00	-	1,026 ft
				33 km	275.63		1,026 m
28	LOC-ILS	IPKU	111.75 MHz	18 nm	269.97	-	970 ft
				33 km	275.60		970 m
08L	GS	IHFV	109.30 MHz	10 nm	90.96	3.00	1,008 ft
				19 km	96.59		1,008 m
08R	GS	IATL	109.90 MHz	10 nm	90.96	3.00	1,012 ft
				19 km	96.59		1,012 m
09L	GS	IHZK	110.50 MHz	10 nm	90.02	3.00	1,017 ft
				19 km	95.65		1,017 m
09R	GS	IFUN	108.90 MHz	10 nm	90.96	3.00	1,021 ft
				19 km	96.59		1,021 m
10	GS	IOMO	111.55 MHz	10 nm	90.94	3.00	985 ft
				19 km	96.57		985 m
26L	GS	IBRU	108.70 MHz	10 nm	270.96	3.00	992 ft
				19 km	276.59		992 m
26R	GS	IGXZ	110.10 MHz	10 nm	270.96	3.00	984 ft
				19 km	276.59		984 m
27L	GS	IFSQ	108.50 MHz	10 nm	270.96	3.00	990 ft
				19 km	276.59		990 m
27R	GS	IAFA	111.30 MHz	10 nm	270.02	3.00	981 ft
				19 km	275.65		981 m
28	GS	IPKU	111.75 MHz	10 nm	270.94	3.00	990 ft
				19 km	276.57		990 m