


2024/05/23 0429Z

LFPG LUMAN H34 NTS A5 STG R1 DEMOS UN741 EDUMO UW41 LININ GVSV

2382.92 nm / 4413.17 km

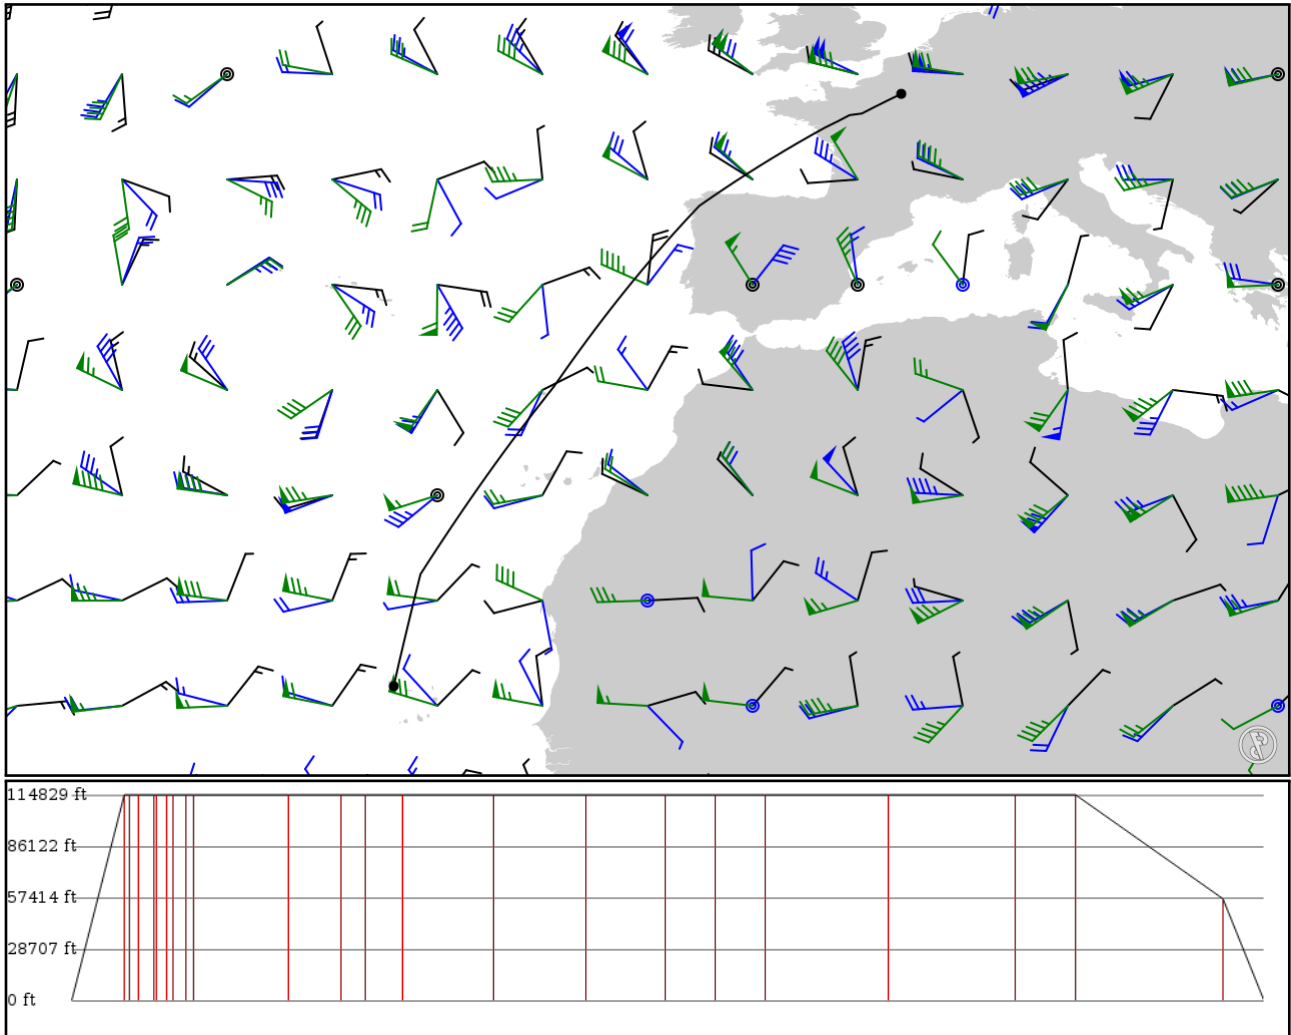

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFPG APT	-	49.00970 2.56257	0 ft 0 m	-	Paris Charles De Gaulle
LUMAN FIX	-	47.93940 0.41333	35,000 ft 10,668 m	107	-
TUNAX FIX	H34 AWY-LO	47.91250 0.20167	35,000 ft 10,668 m	8	-
SABLE FIX	H34 AWY-LO	47.85310 -0.25000	35,000 ft 10,668 m	18	-
ANG VOR	H34 AWY-LO	47.53690 -0.85183	35,000 ft 10,668 m	30	ANGERS
TMA33 FIX	H34 AWY-LO	47.48690 -0.95389	35,000 ft 10,668 m	5	-
OGLOT FIX	H34 AWY-LO	47.27560 -1.38306	35,000 ft 10,668 m	21	-
NTS VOR	H34 AWY-LO	47.16090 -1.61297	35,000 ft 10,668 m	11	NANTES ATLANTIQUE
NORMI FIX	A5 AWY-LO	46.89610 -2.09194	35,000 ft 10,668 m	25	-
EPIXO FIX	A5 AWY-LO	46.72300 -2.40053	35,000 ft 10,668 m	16	-
LOTEE FIX	A5 AWY-LO	44.65870 -5.83664	35,000 ft 10,668 m	190	-
MEGAT FIX	A5 AWY-LO	43.49890 -7.59647	35,000 ft 10,668 m	103	-
STG VOR	A5 AWY-LO	42.92690 -8.42539	35,000 ft 10,668 m	49	SANTIAGO
DEMOS FIX	R1 AWY-LO	41.92570 -9.36200	35,000 ft 10,668 m	73	-
ASMAR FIX	UN741 AWY-HI	39.37250 -11.59560	35,000 ft 10,668 m	184	-
VERAM FIX	UN741 AWY-HI	36.77250 -13.67530	35,000 ft 10,668 m	184	-
PECKY FIX	UN741 AWY-HI	34.53030 -15.33780	35,000 ft 10,668 m	157	-
SNT VOR	UN741 AWY-HI	33.09040 -16.35060	35,000 ft 10,668 m	100	PORTO SANTO
NELSO FIX	UN741 AWY-HI	31.68290 -17.45700	35,000 ft 10,668 m	101	-
ROSTA FIX	UN741 AWY-HI	28.25610 -20.00000	35,000 ft 10,668 m	244	-
NORED FIX	UN741 AWY-HI	24.63840 -22.48000	35,000 ft 10,668 m	254	-
EDUMO FIX	UN741 AWY-HI	22.91670 -23.60000	35,000 ft 10,668 m	120	-
LININ FIX	UN741 AWY-HI	18.15140 -24.75670	17,300 ft 5,273 m	293	-
GVSV APT	-	16.83370 -25.05460	0 ft 0 m	80	Sao Pedro

LFPG

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 4

Elevation: 392 ft / 119 m
Location: 49.009700 2.562570
Magnetic Var: 1.500 E

METAR

LFPG 230400Z 25004KT CAVOK 12/11 Q1015 NOSIG

TAF

TAF LFPG 222300Z 2300/2406 20005KT CAVOK TX18/2315Z TN12/2302Z PROB40 TEMPO 2300/2305 4000 BR TEMPO 2312/2322 4000

Frequencies

REC - 128.32 MHz - ATIS	REC - 127.12 MHz - ATIS
TWR - 120.90 MHz - DE GAULLE TOWER	TWR - 125.32 MHz - DE GAULLE TOWER
TWR - 119.62 MHz - DE GAULLE TOWER	TWR - 119.25 MHz - DE GAULLE TOWER
TWR - 118.65 MHz - DE GAULLE TOWER	TWR - 123.60 MHz - DE GAULLE TOWER
TWR - 120.65 MHz - DE GAULLE TOWER	GND - 121.90 MHz - DE GAULLE GROUND
GND - 125.30 MHz - DE GAULLE GROUND	GND - 121.70 MHz - DE GAULLE GROUND
CLD - 121.80 MHz - CLEARANCE DELIVERY	APP - 118.15 MHz - DE GAULLE APPROACH
APP - 119.85 MHz - DE GAULLE APPROACH	APP - 121.15 MHz - DE GAULLE APPROACH
APP - 125.82 MHz - DE GAULLE APPROACH	APP - 126.42 MHz - DE GAULLE APPROACH
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 133.37 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	13,713 ft	85.31	ASPHALT	0 ft	489 ft
	45 m	4,180 m	83.81		0 m	149 m
26R	148 ft	13,713 ft	265.35	ASPHALT	1,877 ft	279 ft
	45 m	4,180 m	263.85		572 m	85 m
09L	197 ft	8,866 ft	85.32	ASPHALT	0 ft	0 ft
	60 m	2,703 m	83.82		0 m	0 m
27R	197 ft	8,866 ft	265.35	ASPHALT	0 ft	0 ft
	60 m	2,703 m	263.85		0 m	0 m
08R	197 ft	8,833 ft	85.33	ASPHALT	0 ft	489 ft
	60 m	2,692 m	83.83		0 m	149 m
26L	197 ft	8,833 ft	265.35	ASPHALT	0 ft	486 ft
	60 m	2,692 m	263.85		0 m	148 m
09R	148 ft	13,746 ft	85.30	ASPHALT	0 ft	0 ft
	45 m	4,190 m	83.80		0 m	0 m
27L	148 ft	13,746 ft	265.34	ASPHALT	1,959 ft	0 ft
	45 m	4,190 m	263.84		597 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	DSE	108.55 MHz	18 nm	-	-	358 ft
				33 km	-		358 m
09L	DME	PNE	109.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
09R	DME	CGE	110.10 MHz	18 nm	-	-	392 ft
				33 km	-		392 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	DSU	108.35 MHz	18 nm 33 km	- -	-	338 ft 338 m
27L	DME	CGW	110.70 MHz	18 nm 33 km	- -	-	407 ft 407 m
27R	DME	PNW	110.35 MHz	18 nm 33 km	- -	-	392 ft 392 m
08L	LOC-ILS	GLE	108.70 MHz	18 nm 33 km	85.33 83.83	-	392 ft 392 m
08R	LOC-ILS	DSE	108.55 MHz	18 nm 33 km	85.34 83.84	-	392 ft 392 m
09L	LOC-ILS	PNE	109.35 MHz	18 nm 33 km	85.33 83.83	-	392 ft 392 m
09R	LOC-ILS	CGE	110.10 MHz	18 nm 33 km	85.32 83.82	-	392 ft 392 m
26L	LOC-ILS	DSU	108.35 MHz	18 nm 33 km	265.34 263.84	-	392 ft 392 m
26R	LOC-ILS	GAU	111.95 MHz	18 nm 33 km	265.33 263.83	-	392 ft 392 m
27L	LOC-ILS	CGW	110.70 MHz	18 nm 33 km	265.32 263.82	-	392 ft 392 m
27R	LOC-ILS	PNW	110.35 MHz	18 nm 33 km	265.33 263.83	-	392 ft 392 m
08L	GS	GLE	108.70 MHz	10 nm 19 km	85.33 83.83	3.00	392 ft 392 m
08R	GS	DSE	108.55 MHz	10 nm 19 km	85.34 83.84	3.00	392 ft 392 m
09L	GS	PNE	109.35 MHz	10 nm 19 km	85.33 83.83	3.00	392 ft 392 m
09R	GS	CGE	110.10 MHz	10 nm 19 km	85.32 83.82	3.00	392 ft 392 m
26L	GS	DSU	108.35 MHz	10 nm 19 km	265.34 263.84	3.00	392 ft 392 m
26R	GS	GAU	111.95 MHz	10 nm 19 km	265.33 263.83	3.00	392 ft 392 m
27L	GS	CGW	110.70 MHz	10 nm 19 km	265.32 263.82	3.00	392 ft 392 m
27R	GS	PNW	110.35 MHz	10 nm 19 km	265.33 263.83	3.00	392 ft 392 m