

PANC

Ted Stevens Anchorage Intl


PAII

EGEGIK

2024/05/29 0026Z

PANC TUCKS **V456** BITOP PAII

287.08 nm / 531.68 km

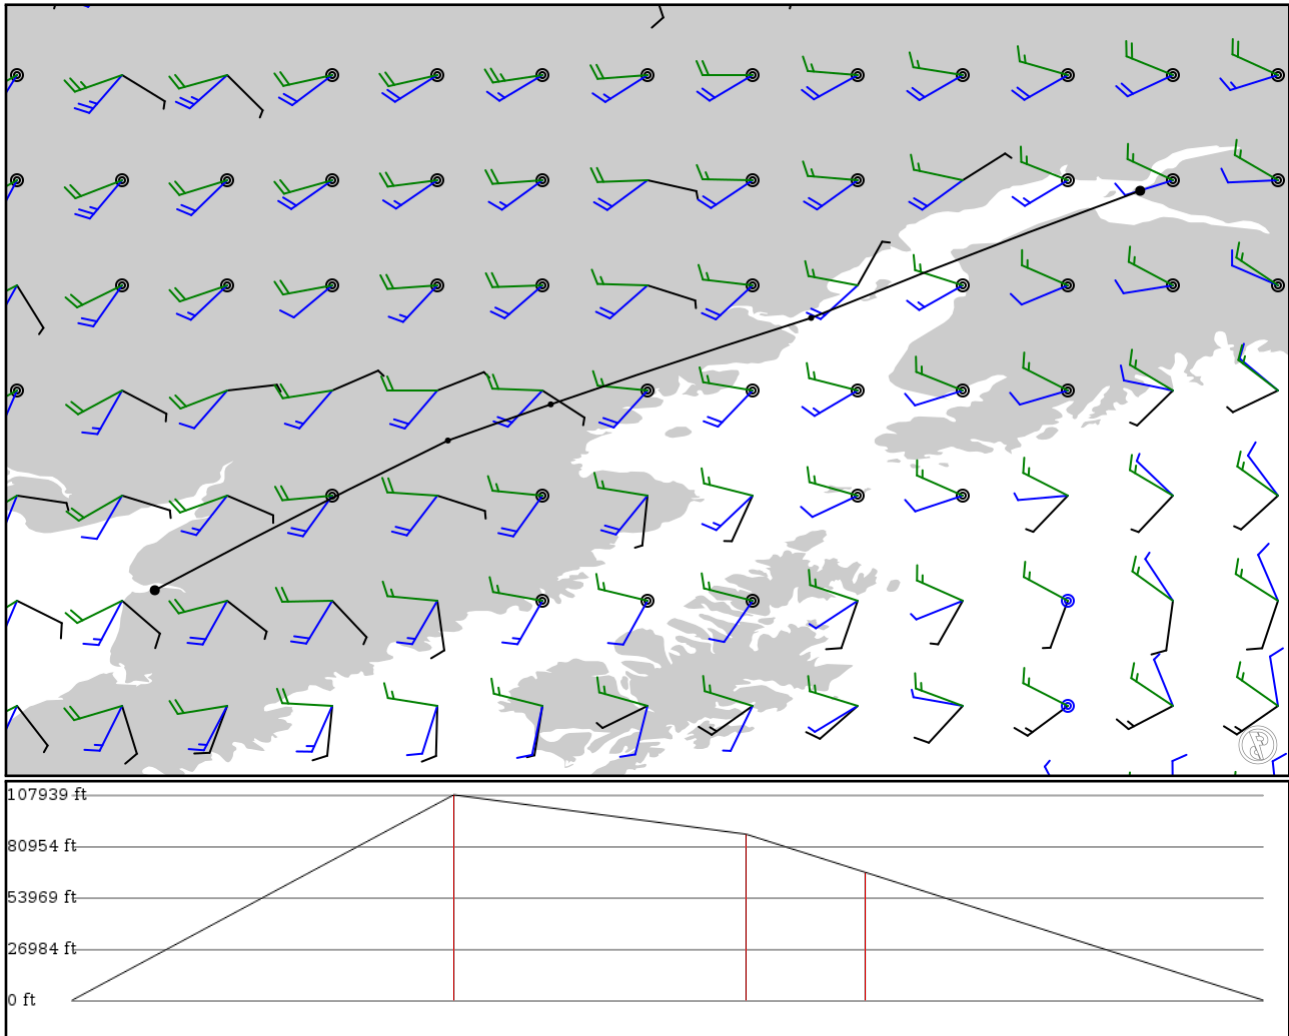

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC APT	-	61.17430 -149.99800	0 ft 0 m	-	Ted Stevens Anchorage Intl
TUCKS FIX	-	60.22300 -152.46100	32,900 ft 10,028 m	92	-
NOSKY FIX	V456 AWY-LO	59.57620 -154.41000	26,600 ft 8,108 m	70	-
BITOP FIX	V456 AWY-LO	59.30570 -155.18000	20,500 ft 6,248 m	28	-
PAII APT	-	58.18550 -157.37400	0 ft 0 m	95	EGEGIK

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.007 E

METAR

PANC 282353Z 33005KT 10SM OVC055 13/06 A2987

TAF

PANC 282323Z 2900/3006 24007KT P6SM BKN050 FM290800 17012G22KT P6SM -RA FEW025 OVC040 FM291500 16008KT P6SM VCSH

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.83		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.89		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.87		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.92		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.88		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.90		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.89		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.86		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.89		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.89		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.86		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.89		151 m