


2024/06/07 0145Z

OERK DEBAS **G667** TABNA OEWD

283.69 nm / 525.40 km

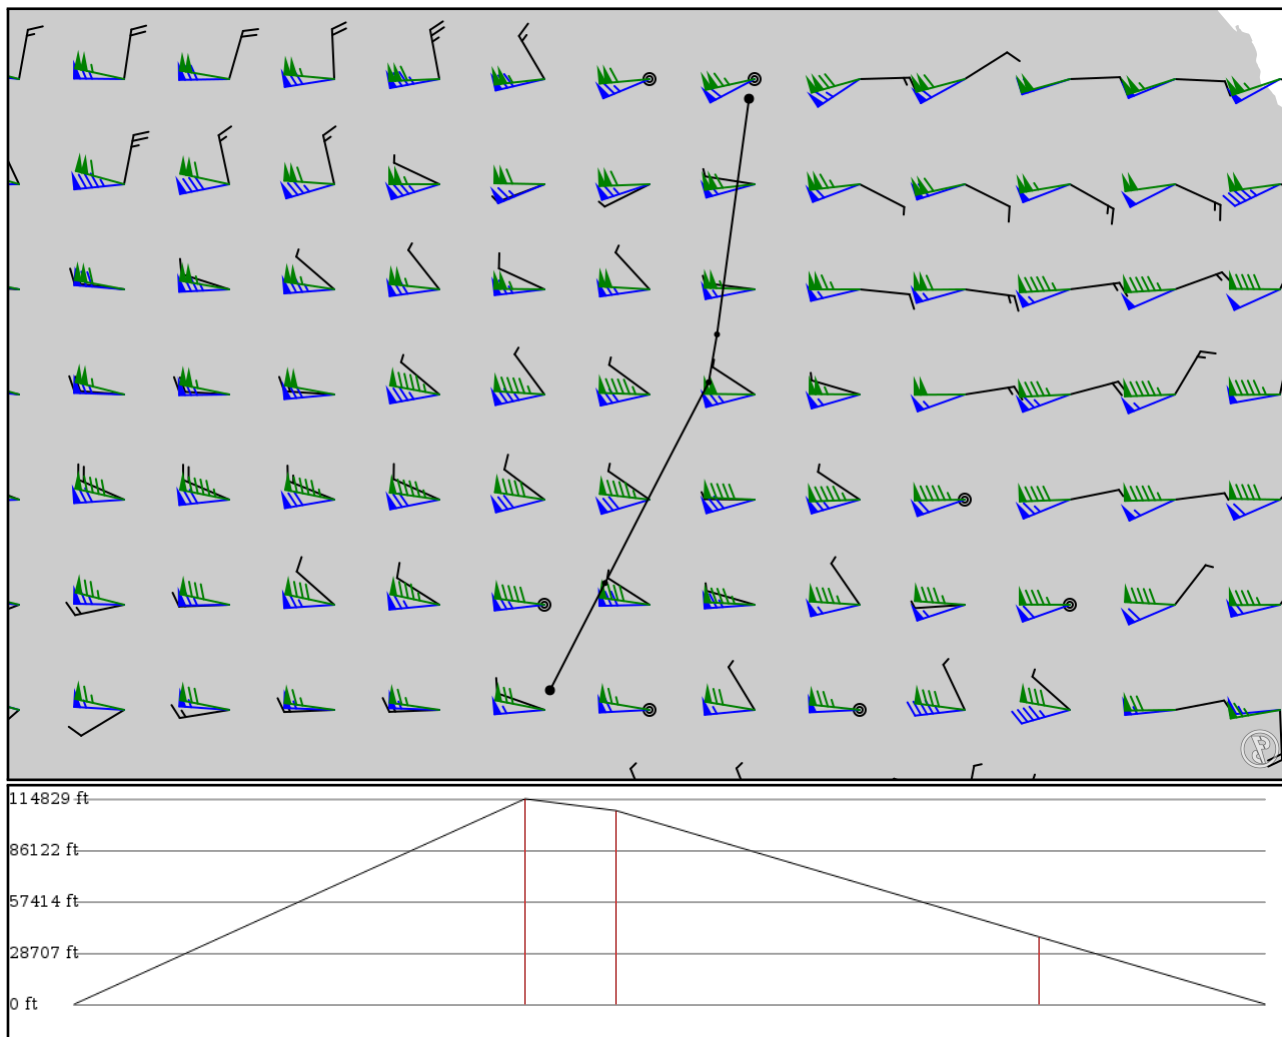

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OERK APT	-	24.95740 46.69880	0 ft 0 m	-	King Khalid Intl
DEBAS FIX	-	23.18310 46.45780	35,000 ft 10,668 m	107	-
KITUB FIX	G667 AWY-HI	22.82280 46.39500	33,000 ft 10,058 m	21	-
TABNA FIX	G667 AWY-HI	21.31170 45.61460	11,500 ft 3,505 m	100	-
OEWD APT	-	20.50430 45.19960	0 ft 0 m	53	WADI AL DAWASIR

OERK

Region: SAUDI ARABIA
Timezone: ASIA/RIYADH
Runways: 2

Elevation: 2,048 ft / 624 m
Location: 24.957400 46.698800
Magnetic Var: 3.356 E

METAR

OERK 070100Z 11003KT CAVOK 32/M04 Q1007 NOSIG

TAF

TAF OERK 062300Z 0700/0806 12008KT CAVOK BECMG 0706/0708 20015KT 7000 NSC BECMG 0714/0716 35014KT BECMG 0800/0802

Frequencies

REC - 113.30 MHz - ATIS	CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.70 MHz - GROUND	GND - 121.60 MHz - GROUND
TWR - 118.60 MHz - TOWER	TWR - 118.80 MHz - TOWER
APP - 124.10 MHz - RIYADH APPROACH	APP - 120.00 MHz - RIYADH APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	197 ft	13,809 ft	150.17	CONCRETE	0 ft	387 ft
	60 m	4,209 m	146.81		0 m	118 m
33L	197 ft	13,809 ft	330.18	CONCRETE	0 ft	384 ft
	60 m	4,209 m	326.82		0 m	117 m
15L	197 ft	13,809 ft	150.18	CONCRETE	0 ft	390 ft
	60 m	4,209 m	146.82		0 m	119 m
33R	197 ft	13,809 ft	330.19	CONCRETE	0 ft	390 ft
	60 m	4,209 m	326.83		0 m	119 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15L	DME	IELF	109.50 MHz	18 nm	-	-	2,049 ft
				33 km	-		2,049 m
15R	DME	ITIH	110.50 MHz	18 nm	-	-	2,047 ft
				33 km	-		2,047 m
33L	DME	IFAT	110.10 MHz	18 nm	-	-	2,023 ft
				33 km	-		2,023 m
33R	DME	IKIA	109.10 MHz	18 nm	-	-	2,049 ft
				33 km	-		2,049 m
15L	LOC-ILS	IELF	109.50 MHz	18 nm	150.18	-	2,049 ft
				33 km	146.82		2,049 m
15R	LOC-ILS	ITIH	110.50 MHz	18 nm	150.17	-	2,046 ft
				33 km	146.82		2,046 m
33L	LOC-ILS	IFAT	110.10 MHz	18 nm	330.16	-	2,049 ft
				33 km	326.80		2,049 m
33R	LOC-ILS	IKIA	109.10 MHz	18 nm	330.18	-	2,049 ft
				33 km	326.82		2,049 m
15L	GS	IELF	109.50 MHz	10 nm	150.35	3.00	2,033 ft
				19 km	147.00		2,033 m
15R	GS	ITIH	110.50 MHz	10 nm	150.33	3.00	2,047 ft
				19 km	146.97		2,047 m
33L	GS	IFAT	110.10 MHz	10 nm	330.33	3.00	2,023 ft
				19 km	326.97		2,023 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
33R	GS	IKIA	109.10 MHz	10 nm	330.35	3.00	2,023 ft
				19 km	327.00		2,023 m

OEWD

Region: SAUDI ARABIA
Timezone: ASIA/RIYADH
Runways: 1

Elevation: 2,062 ft / 628 m
Location: 20.504300 45.199600
Magnetic Var: 2.954 E

METAR

OEWD 070100Z 15006KT CAVOK 29/M07 Q1007

TAF

TAF OEWD 062300Z 0700/0806 17005KT CAVOK BECMG 0706/0708 24013KT BECMG 0722/0800 16005KT

Frequencies

COM - 122.80 MHz - CTAF

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	147 ft	9,987 ft	102.04	ASPHALT	0 ft	395 ft
	45 m	3,044 m	99.09		0 m	120 m
28	147 ft	9,987 ft	282.05	ASPHALT	0 ft	395 ft
	45 m	3,044 m	279.10		0 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	LOC-ILS	IWDR	110.50 MHz	18 nm	102.38	-	2,062 ft
				33 km	99.42		2,062 m
10	GS	IWDR	110.50 MHz	10 nm	102.09	3.00	2,062 ft
				19 km	99.14		2,062 m