


2024/06/07 0656Z

LCEN 3300N03300E 3100N03200E HECA

323.66 nm / 599.41 km

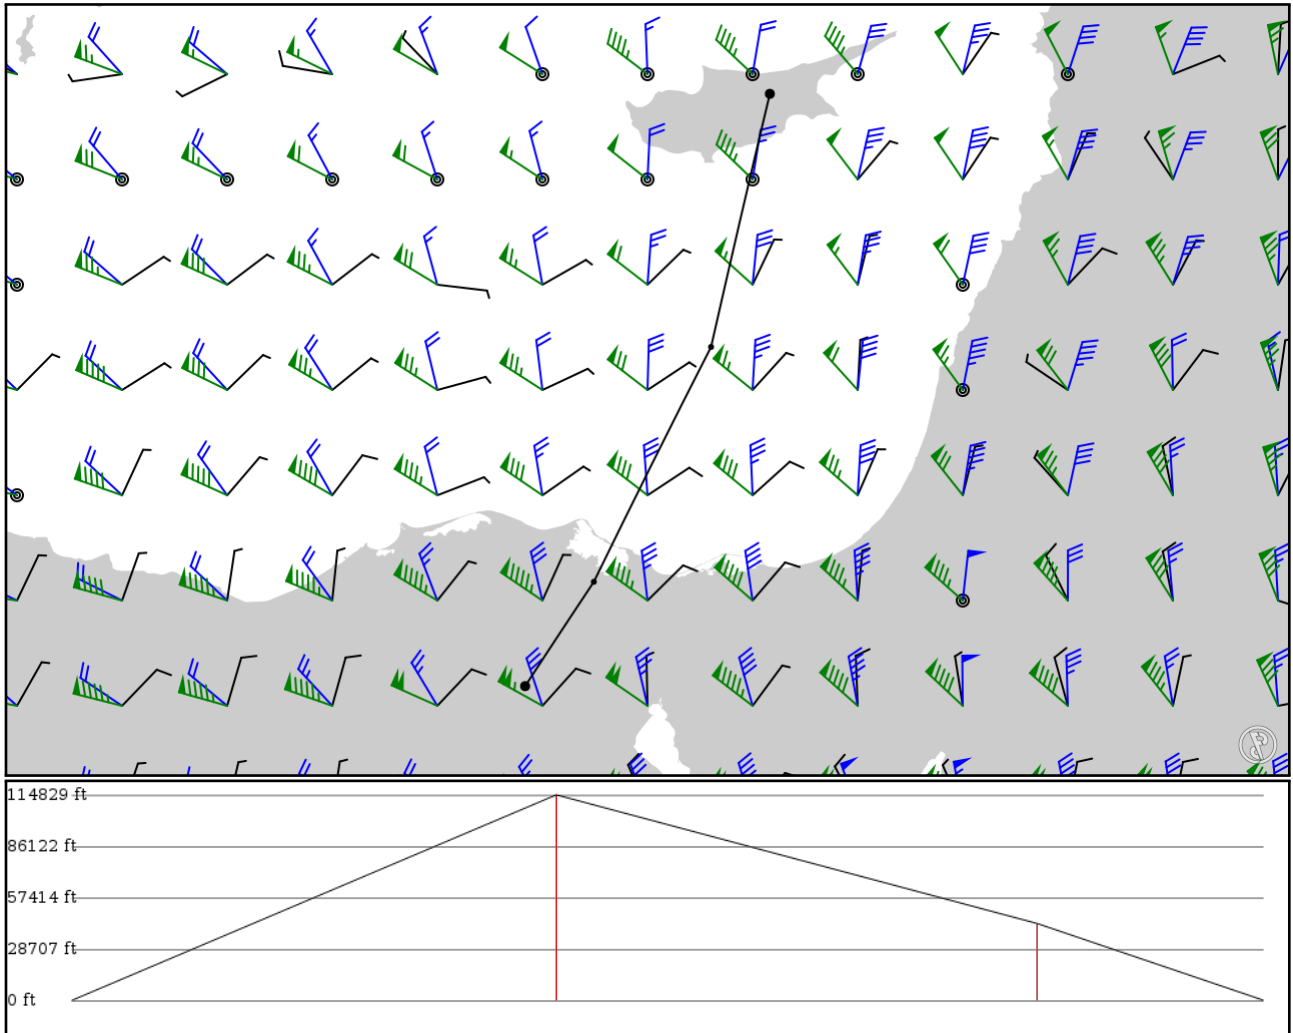

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: no
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LCEN	-	35.15520	0 ft	-	Ercan International
APT	-	33.50150	0 m		
3300N03300E	-	33.00000	35,000 ft	131	-
LATLON	-	33.00000	10,668 m		
3100N03200E	-	31.00000	13,100 ft	130	-
LATLON	-	32.00000	3,993 m		
HECA	-	30.11140	0 ft	61	Cairo Intl
APT	-	31.41390	0 m		

LCEN

Region: CYPRUS
Timezone: ASIA/NICOSIA
Runways: 1

Elevation: 402 ft / 123 m
Location: 35.155200 33.501500
Magnetic Var: 5.586 E

METAR

LCEN 070620Z 29004KT CAVOK 38/07 Q1008 NOSIG RMK RWY11R 03004KT RWY29R 35006KT 310V050 RWY11L 35005KT 260V050

TAF

TAF TAF LCEN 070440Z 0706/0806 05012KT CAVOK BECMG 0710/0714 13015KT 9999 FEW025 BECMG 0716/0719 29012KT CAVOK

Frequencies

REC - 118.35 MHz - ERCAN ATIS
TWR - 120.37 MHz - ERCAN TOWER
APP - 127.75 MHz - ERCAN APPROACH

TWR - 120.25 MHz - ERCAN TOWER
TWR - 120.45 MHz - ERCAN TOWER
APP - 119.77 MHz - ERCAN APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	140 ft	9,035 ft	111.86	ASPHALT	0 ft	0 ft
	43 m	2,754 m	106.28		0 m	0 m
29	140 ft	9,035 ft	291.88	ASPHALT	0 ft	0 ft
	43 m	2,754 m	286.29		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
29	LOC-ILS	ECN	117.00 MHz	18 nm	291.87	-	402 ft
				33 km	286.28		402 m
29	GS	ECN	117.00 MHz	10 nm	291.87	2.80	402 ft
				19 km	286.28		402 m

HECA

Region: EGYPT
Timezone: AFRICA/CAIRO
Runways: 3

Elevation: 466 ft / 142 m
Location: 30.111400 31.413900
Magnetic Var: 4.957 E

METAR

HECA 070600Z 36003KT CAVOK 30/19 Q1009

TAF

TAF HECA 070500Z 0706/0812 03007KT CAVOK PROB30 TEMPO 0706/0708 VRB03KT 4000 HZ NSC

Frequencies

REC - 122.60 MHz - ATIS
GND - 121.90 MHz - CAIRO GROUND NORTH
APP - 119.05 MHz - CAIRO APPROACH
GND - 120.40 MHz - CAIRO GROUND SOUTH
TWR - 118.10 MHz - CAIRO TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	197 ft	13,135 ft	49.04	ASPHALT	0 ft	217 ft
	60 m	4,004 m	44.08		0 m	66 m
23L	197 ft	13,135 ft	229.05	ASPHALT	0 ft	226 ft
	60 m	4,004 m	224.10		0 m	69 m
05C	197 ft	13,132 ft	49.04	ASPHALT	0 ft	217 ft
	60 m	4,003 m	44.08		0 m	66 m
23C	197 ft	13,132 ft	229.05	ASPHALT	0 ft	226 ft
	60 m	4,003 m	224.10		0 m	69 m
05L	197 ft	10,840 ft	49.29	ASPHALT	0 ft	184 ft
	60 m	3,304 m	44.33		0 m	56 m
23R	197 ft	10,840 ft	229.30	ASPHALT	0 ft	184 ft
	60 m	3,304 m	224.35		0 m	56 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	CRL	110.90 MHz	18 nm	-	-	230 ft
				33 km	-		230 m
05R	DME	IROT	109.90 MHz	18 nm	-	-	430 ft
				33 km	-		430 m
23L	DME	ILOT	109.50 MHz	18 nm	-	-	420 ft
				33 km	-		420 m
23R	DME	CRR	110.30 MHz	18 nm	-	-	230 ft
				33 km	-		230 m
05L	LOC-ILS	IZFL	110.90 MHz	18 nm	49.30	-	466 ft
				33 km	44.34		466 m
05C	LOC-ILS	IZFC	109.90 MHz	18 nm	49.04	-	466 ft
				33 km	44.08		466 m
05R	LOC-ILS	IZFR	108.90 MHz	18 nm	49.05	-	466 ft
				33 km	44.09		466 m
23L	LOC-ILS	ITTL	108.70 MHz	18 nm	229.05	-	466 ft
				33 km	224.09		466 m
23C	LOC-ILS	ITTC	109.50 MHz	18 nm	229.04	-	466 ft
				33 km	224.08		466 m
23R	LOC-ILS	ITTR	110.30 MHz	18 nm	229.30	-	466 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	224.34		466 m
05L	GS	IZFL	110.90 MHz	10 nm	49.30	3.00	466 ft
				19 km	44.34		466 m
05C	GS	IZFC	109.90 MHz	10 nm	49.04	3.00	466 ft
				19 km	44.08		466 m
05R	GS	IZFR	108.90 MHz	10 nm	49.05	3.00	466 ft
				19 km	44.09		466 m
23L	GS	ITTL	108.70 MHz	10 nm	229.05	3.00	466 ft
				19 km	224.09		466 m
23C	GS	ITTC	109.50 MHz	10 nm	229.04	3.00	466 ft
				19 km	224.08		466 m
23R	GS	ITTR	110.30 MHz	10 nm	229.30	3.00	466 ft
				19 km	224.34		466 m