

KMDW

Chicago Midway Intl


KORD

CHICAGO OHARE INTL

2024/05/13 1923Z

KMDW KORD

13.67 nm / 25.32 km

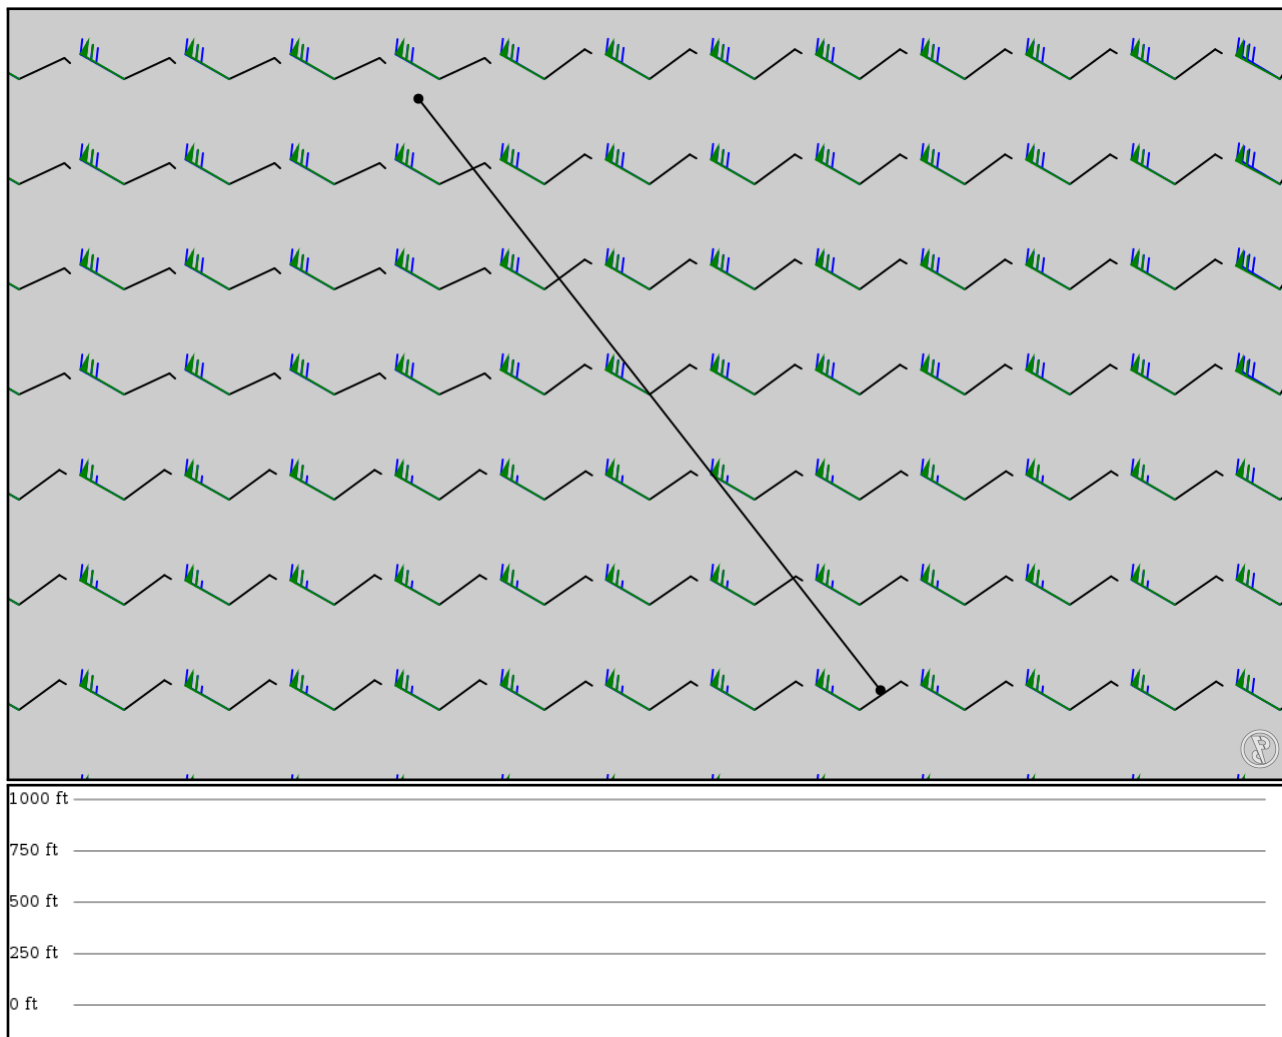

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMDW	-	41.78594	0 ft	-	Chicago Midway Intl
APT	-	-87.75252	0 m		
KORD	-	41.98274	0 ft	13	CHICAGO OHARE INTL
APT	-	-87.90631	0 m		

KMDW

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 5

Elevation: 620 ft / 189 m
Location: 41.785900 -87.752500
Magnetic Var: 4.205 W

METAR

KMDW 131853Z 21009KT 10SM FEW055 SCT100 BKN160 BKN250 27/12 A2973 RMK A02 LTG DSNT S AND SW SLP058 T02670122

TAF

KMDW 131733Z 1318/1424 22009KT P6SM VCTS BKN060CB TEMPO 1319/1323 VRB15G25KT 2SM +TSRA BKN020CB OVC030 FM140100 0

Frequencies

REC - 132.75 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 124.62 MHz - CLEARANCE DELIVERY	GND - 121.65 MHz - MIDWAY GROUND
TWR - 135.20 MHz - MIDWAY TOWER	DEP - 128.20 MHz - CHICAGO DEPARTURE
APP - 128.20 MHz - CHICAGO APPROACH	APP - 126.05 MHz - CHICAGO APPROACH
DEP - 126.05 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13L	150 ft	5,138 ft	133.63	ASPHALT	751 ft	0 ft
	46 m	1,566 m	137.84		229 m	0 m
31R	150 ft	5,138 ft	313.64	ASPHALT	0 ft	0 ft
	46 m	1,566 m	317.85		0 m	0 m
13C	150 ft	6,525 ft	133.65	ASPHALT	466 ft	0 ft
	46 m	1,989 m	137.85		142 m	0 m
31C	150 ft	6,525 ft	313.66	ASPHALT	699 ft	0 ft
	46 m	1,989 m	317.86		213 m	0 m
13R	60 ft	3,858 ft	133.66	ASPHALT	0 ft	331 ft
	18 m	1,176 m	137.87		0 m	101 m
31L	60 ft	3,858 ft	313.67	ASPHALT	0 ft	95 ft
	18 m	1,176 m	317.87		0 m	29 m
04L	150 ft	5,509 ft	43.35	ASPHALT	761 ft	0 ft
	46 m	1,679 m	47.55		232 m	0 m
22R	150 ft	5,509 ft	223.36	ASPHALT	879 ft	0 ft
	46 m	1,679 m	227.56		268 m	0 m
04R	150 ft	6,443 ft	43.36	ASPHALT	518 ft	0 ft
	46 m	1,964 m	47.56		158 m	0 m
22L	150 ft	6,443 ft	223.37	ASPHALT	633 ft	0 ft
	46 m	1,964 m	227.57		193 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13C	DME	IMDW	109.90 MHz	18 nm	-	-	620 ft
				33 km	-		620 m
31C	DME	IMXT	109.90 MHz	18 nm	-	-	620 ft
				33 km	-		620 m
04R	LOC-ILS	IHKH	111.50 MHz	18 nm	43.37	-	620 ft
				33 km	47.57		620 m
13C	LOC-ILS	IMDW	109.90 MHz	18 nm	133.66	-	620 ft
				33 km	137.86		620 m
31C	LOC-ILS	IMXT	109.90 MHz	18 nm	313.66	-	620 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	317.86		620 m
04R	GS	IHKH	111.50 MHz	10 nm	43.37	3.00	620 ft
				19 km	47.57		620 m
13C	GS	IMDW	109.90 MHz	10 nm	133.66	3.00	620 ft
				19 km	137.86		620 m
31C	GS	IMXT	109.90 MHz	10 nm	313.66	3.00	620 ft
				19 km	317.86		620 m

KORD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 6

Elevation: 680 ft / 207 m
Location: 41.973400 -87.906600
Magnetic Var: 4.111 W

METAR

KORD 131851Z 25007KT 10SM FEW065CB SCT095 BKN140 OVC250 27/12 A2972 RMK A02 LTG DSNT S AND SW SLP060 CB S-SW MOV NE

TAF

KORD 131733Z 1318/1424 22009KT P6SM VCTS BKN060CB TEMPO 1319/1323 VRB15G25KT 2SM +TSRA BKN020CB OVC030 FM140100 0

Frequencies

REC - 135.40 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.25 MHz - CLEARANCE DELIVERY	CLD - 121.60 MHz - CLEARANCE DELIVERY
GND - 118.05 MHz - O'HARE GROUND	GND - 121.67 MHz - O'HARE GROUND
GND - 121.75 MHz - O'HARE GROUND	GND - 121.90 MHz - O'HARE GROUND
GND - 124.12 MHz - O'HARE GROUND	GND - 134.12 MHz - O'HARE GROUND
TWR - 120.75 MHz - O'HARE TOWER	TWR - 121.15 MHz - O'HARE TOWER
TWR - 126.90 MHz - O'HARE TOWER	TWR - 127.92 MHz - O'HARE TOWER
TWR - 132.70 MHz - O'HARE TOWER	TWR - 128.15 MHz - O'HARE TOWER
TWR - 133.00 MHz - O'HARE TOWER	APP - 119.00 MHz - CHICAGO APPROACH
APP - 133.62 MHz - CHICAGO APPROACH	APP - 124.35 MHz - CHICAGO APPROACH
APP - 125.70 MHz - CHICAGO APPROACH	DEP - 125.00 MHz - CHICAGO DEPARTURE
DEP - 125.40 MHz - CHICAGO DEPARTURE	DEP - 127.40 MHz - CHICAGO DEPARTURE
DEP - 128.80 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10C	200 ft	10,789 ft	89.85	CONCRETE	0 ft	397 ft
	61 m	3,289 m	93.96		0 m	121 m
28C	200 ft	10,789 ft	269.88	CONCRETE	0 ft	381 ft
	61 m	3,289 m	273.99		0 m	116 m
10L	151 ft	12,996 ft	89.87	CONCRETE	0 ft	394 ft
	46 m	3,961 m	93.99		0 m	120 m
28R	151 ft	12,996 ft	269.91	CONCRETE	0 ft	285 ft
	46 m	3,961 m	274.02		0 m	87 m
04R	151 ft	8,074 ft	41.40	CONCRETE	0 ft	850 ft
	46 m	2,461 m	45.51		0 m	259 m
22L	151 ft	8,074 ft	221.41	CONCRETE	0 ft	584 ft
	46 m	2,461 m	225.53		0 m	178 m
09R	151 ft	7,949 ft	89.98	CONCRETE	0 ft	148 ft
	46 m	2,423 m	94.09		0 m	45 m
27L	151 ft	7,949 ft	270.00	CONCRETE	0 ft	197 ft
	46 m	2,423 m	274.11		0 m	60 m
09L	151 ft	7,484 ft	89.99	CONCRETE	0 ft	397 ft
	46 m	2,281 m	94.10		0 m	121 m
27R	151 ft	7,484 ft	270.00	CONCRETE	0 ft	397 ft
	46 m	2,281 m	274.12		0 m	121 m
10R	151 ft	7,484 ft	89.85	CONCRETE	0 ft	400 ft
	46 m	2,281 m	93.96		0 m	122 m
28L	151 ft	7,484 ft	269.87	CONCRETE	0 ft	400 ft
	46 m	2,281 m	273.98		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	ISAJ	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
10L	DME	IMED	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
27L	DME	IIAC	110.50 MHz	18 nm	-	-	641 ft
				33 km	-		641 m
27R	DME	IABU	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
28R	DME	ITSL	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
04R	LOC-ILS	IFJU	110.10 MHz	18 nm	41.41	-	680 ft
				33 km	45.52		680 m
09L	LOC-ILS	ISAJ	111.75 MHz	18 nm	90.00	-	680 ft
				33 km	94.11		680 m
09R	LOC-ILS	IJAV	110.50 MHz	18 nm	89.99	-	680 ft
				33 km	94.10		680 m
10L	LOC-ILS	IMED	111.10 MHz	18 nm	89.89	-	680 ft
				33 km	94.00		680 m
10C	LOC-ILS	ISXH	108.95 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
10R	LOC-ILS	IIZJ	110.75 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
22L	LOC-ILS	ILQQ	110.10 MHz	18 nm	221.41	-	680 ft
				33 km	225.52		680 m
27L	LOC-ILS	IIAC	110.50 MHz	18 nm	269.99	-	680 ft
				33 km	274.10		680 m
27R	LOC-ILS	IABU	111.75 MHz	18 nm	270.00	-	680 ft
				33 km	274.11		680 m
28L	LOC-ILS	IVQX	110.75 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28C	LOC-ILS	IVZE	108.95 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28R	LOC-ILS	ITSL	111.10 MHz	18 nm	269.88	-	680 ft
				33 km	273.99		680 m
04R	GS	IFJU	110.10 MHz	10 nm	41.41	3.00	680 ft
				19 km	45.52		680 m
09L	GS	ISAJ	111.75 MHz	10 nm	90.00	3.00	680 ft
				19 km	94.11		680 m
09R	GS	IJAV	110.50 MHz	10 nm	89.99	3.00	680 ft
				19 km	94.10		680 m
10L	GS	IMED	111.10 MHz	10 nm	89.89	3.00	680 ft
				19 km	94.00		680 m
10C	GS	ISXH	108.95 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
10R	GS	IIZJ	110.75 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
22L	GS	ILQQ	110.10 MHz	10 nm	221.41	3.00	680 ft
				19 km	225.52		680 m
27L	GS	IIAC	110.50 MHz	10 nm	269.99	3.00	680 ft
				19 km	274.10		680 m
27R	GS	IABU	111.75 MHz	10 nm	270.00	3.00	680 ft
				19 km	274.11		680 m
28L	GS	IVQX	110.75 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28C	GS	IVZE	108.95 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28R	GS	ITSL	111.10 MHz	10 nm	269.88	3.00	680 ft
				19 km	273.99		680 m