

LIPE

BOLOGNA


LFPG

Paris Charles De Gaulle

2024/06/05 0817Z

LIPE ROBAS **UL153** ROMTA **UM982** ERTIP LFPG

452.64 nm / 838.28 km

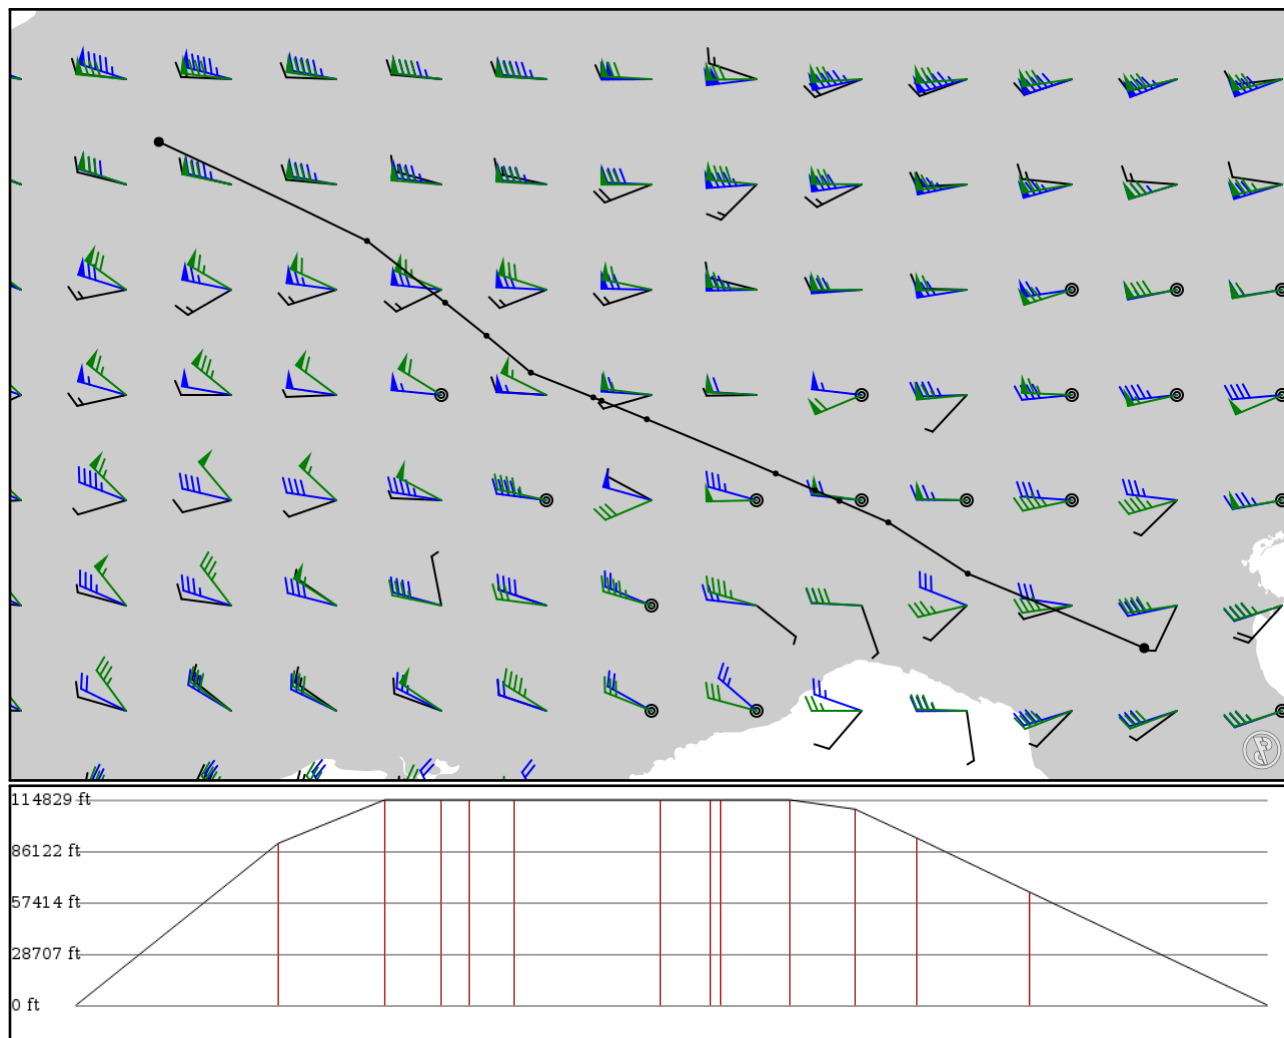

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 33000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIPE	-	44.53545	0 ft	-	BOLOGNA
APT	-	11.28866	0 m		
ROBAS	-	45.19361	27,600 ft	77	-
FIX	-	9.72611	8,412 m		
SRN	UL153	45.64667	35,000 ft	40	SARONNO NDB
NDB	AWY-HI	9.02278	10,668 m		
IXORA	UL153	45.83667	35,000 ft	21	-
FIX	AWY-HI	8.58889	10,668 m		
ARLES	UL153	45.92944	35,000 ft	10	-
FIX	AWY-HI	8.37500	10,668 m		
PUNSA	UL153	46.07861	35,000 ft	17	-
FIX	AWY-HI	8.02583	10,668 m		
SOSAL	UL153	46.55806	35,000 ft	55	-
FIX	AWY-HI	6.88444	10,668 m		
VADEM	UL153	46.72167	35,000 ft	19	-
FIX	AWY-HI	6.48333	10,668 m		
BIBOT	UL153	46.75139	35,000 ft	3	-
FIX	AWY-HI	6.41028	10,668 m		
ROMTA	UL153	46.97028	35,000 ft	26	-
FIX	AWY-HI	5.85722	10,668 m		
DERAK	UM982	47.29639	33,400 ft	25	-
FIX	AWY-HI	5.46528	10,180 m		
TINIL	UM982	47.58889	28,500 ft	23	-
FIX	AWY-HI	5.09861	8,687 m		
ERTIP	UM982	48.13444	19,300 ft	43	-
FIX	AWY-HI	4.40667	5,883 m		
LFPG	-	49.00974	0 ft	90	Paris Charles De Gaulle
APT	-	2.56262	0 m		

LIPE

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 123 ft / 37 m
Location: 44.535600 11.288300
Magnetic Var: 3.640 E

METAR

LIPE 050750Z 26010KT CAVOK 22/14 Q1016

TAF

TAF LIPE 050500Z 0506/0606 VRB06KT 9999 FEW030

Frequencies

REC - 134.87 MHz - ATIS
TWR - 120.80 MHz - BOLOGNA TOWER
APP - 129.90 MHz - BOLOGNA APPROACH
GND - 129.92 MHz - BOLOGNA GROUND
APP - 120.10 MHz - BOLOGNA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	9,206 ft	116.79	ASPHALT	1,017 ft	243 ft
	45 m	2,806 m	113.15		310 m	74 m
30	148 ft	9,206 ft	296.81	ASPHALT	1,188 ft	180 ft
	45 m	2,806 m	293.17		362 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	DME	BLN	108.90 MHz	18 nm	-	-	131 ft
				33 km	-		131 m
30	DME	IBBP	109.75 MHz	18 nm	-	-	123 ft
				33 km	-		123 m
12	LOC-ILS	BLN	108.90 MHz	18 nm	116.81	-	123 ft
				33 km	113.17		123 m
30	LOC-ILS	IBBP	109.75 MHz	18 nm	296.66	-	123 ft
				33 km	293.02		123 m
12	GS	BLN	108.90 MHz	10 nm	117.59	3.00	120 ft
				19 km	113.95		120 m
30	GS	IBBP	109.75 MHz	10 nm	297.75	3.50	123 ft
				19 km	294.11		123 m

LFPG

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 4

Elevation: 392 ft / 119 m
Location: 49.009700 2.562570
Magnetic Var: 1.505 E

METAR

LFPG 050800Z 25007KT 220V280 9999 SCT025 BKN120 17/10 Q1014 NOSIG

TAF

TAF LFPG 050500Z 0506/0612 27005KT 9999 SCT030 SCT040 TX20/0515Z TN08/0604Z BECMG 0516/0518 CAVOK BECMG 0519/0521

Frequencies

REC - 128.32 MHz - ATIS	REC - 127.12 MHz - ATIS
TWR - 120.90 MHz - DE GAULLE TOWER	TWR - 125.32 MHz - DE GAULLE TOWER
TWR - 119.62 MHz - DE GAULLE TOWER	TWR - 119.25 MHz - DE GAULLE TOWER
TWR - 118.65 MHz - DE GAULLE TOWER	TWR - 123.60 MHz - DE GAULLE TOWER
TWR - 120.65 MHz - DE GAULLE TOWER	GND - 121.90 MHz - DE GAULLE GROUND
GND - 125.30 MHz - DE GAULLE GROUND	GND - 121.70 MHz - DE GAULLE GROUND
CLD - 121.80 MHz - CLEARANCE DELIVERY	APP - 118.15 MHz - DE GAULLE APPROACH
APP - 119.85 MHz - DE GAULLE APPROACH	APP - 121.15 MHz - DE GAULLE APPROACH
APP - 125.82 MHz - DE GAULLE APPROACH	APP - 126.42 MHz - DE GAULLE APPROACH
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 133.37 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	13,713 ft	85.31	ASPHALT	0 ft	489 ft
	45 m	4,180 m	83.80		0 m	149 m
26R	148 ft	13,713 ft	265.35	ASPHALT	1,877 ft	279 ft
	45 m	4,180 m	263.85		572 m	85 m
09L	197 ft	8,866 ft	85.32	ASPHALT	0 ft	0 ft
	60 m	2,703 m	83.81		0 m	0 m
27R	197 ft	8,866 ft	265.35	ASPHALT	0 ft	0 ft
	60 m	2,703 m	263.84		0 m	0 m
08R	197 ft	8,833 ft	85.33	ASPHALT	0 ft	489 ft
	60 m	2,692 m	83.82		0 m	149 m
26L	197 ft	8,833 ft	265.35	ASPHALT	0 ft	486 ft
	60 m	2,692 m	263.85		0 m	148 m
09R	148 ft	13,746 ft	85.30	ASPHALT	0 ft	0 ft
	45 m	4,190 m	83.79		0 m	0 m
27L	148 ft	13,746 ft	265.34	ASPHALT	1,959 ft	0 ft
	45 m	4,190 m	263.84		597 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	DSE	108.55 MHz	18 nm	-	-	358 ft
				33 km	-		358 m
09L	DME	PNE	109.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
09R	DME	CGE	110.10 MHz	18 nm	-	-	392 ft
				33 km	-		392 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	DSU	108.35 MHz	18 nm	-	-	338 ft
				33 km	-		338 m
27L	DME	CGW	110.70 MHz	18 nm	-	-	407 ft
				33 km	-		407 m
27R	DME	PNW	110.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
08L	LOC-ILS	GLE	108.70 MHz	18 nm	85.33	-	392 ft
				33 km	83.83		392 m
08R	LOC-ILS	DSE	108.55 MHz	18 nm	85.34	-	392 ft
				33 km	83.84		392 m
09L	LOC-ILS	PNE	109.35 MHz	18 nm	85.33	-	392 ft
				33 km	83.83		392 m
09R	LOC-ILS	CGE	110.10 MHz	18 nm	85.32	-	392 ft
				33 km	83.82		392 m
26L	LOC-ILS	DSU	108.35 MHz	18 nm	265.34	-	392 ft
				33 km	263.84		392 m
26R	LOC-ILS	GAU	111.95 MHz	18 nm	265.33	-	392 ft
				33 km	263.83		392 m
27L	LOC-ILS	CGW	110.70 MHz	18 nm	265.32	-	392 ft
				33 km	263.82		392 m
27R	LOC-ILS	PNW	110.35 MHz	18 nm	265.33	-	392 ft
				33 km	263.83		392 m
08L	GS	GLE	108.70 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.83		392 m
08R	GS	DSE	108.55 MHz	10 nm	85.34	3.00	392 ft
				19 km	83.84		392 m
09L	GS	PNE	109.35 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.83		392 m
09R	GS	CGE	110.10 MHz	10 nm	85.32	3.00	392 ft
				19 km	83.82		392 m
26L	GS	DSU	108.35 MHz	10 nm	265.34	3.00	392 ft
				19 km	263.84		392 m
26R	GS	GAU	111.95 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.83		392 m
27L	GS	CGW	110.70 MHz	10 nm	265.32	3.00	392 ft
				19 km	263.82		392 m
27R	GS	PNW	110.35 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.83		392 m