


2024/05/11 1820Z

KBNA COMAR KATL

186.10 nm / 344.65 km

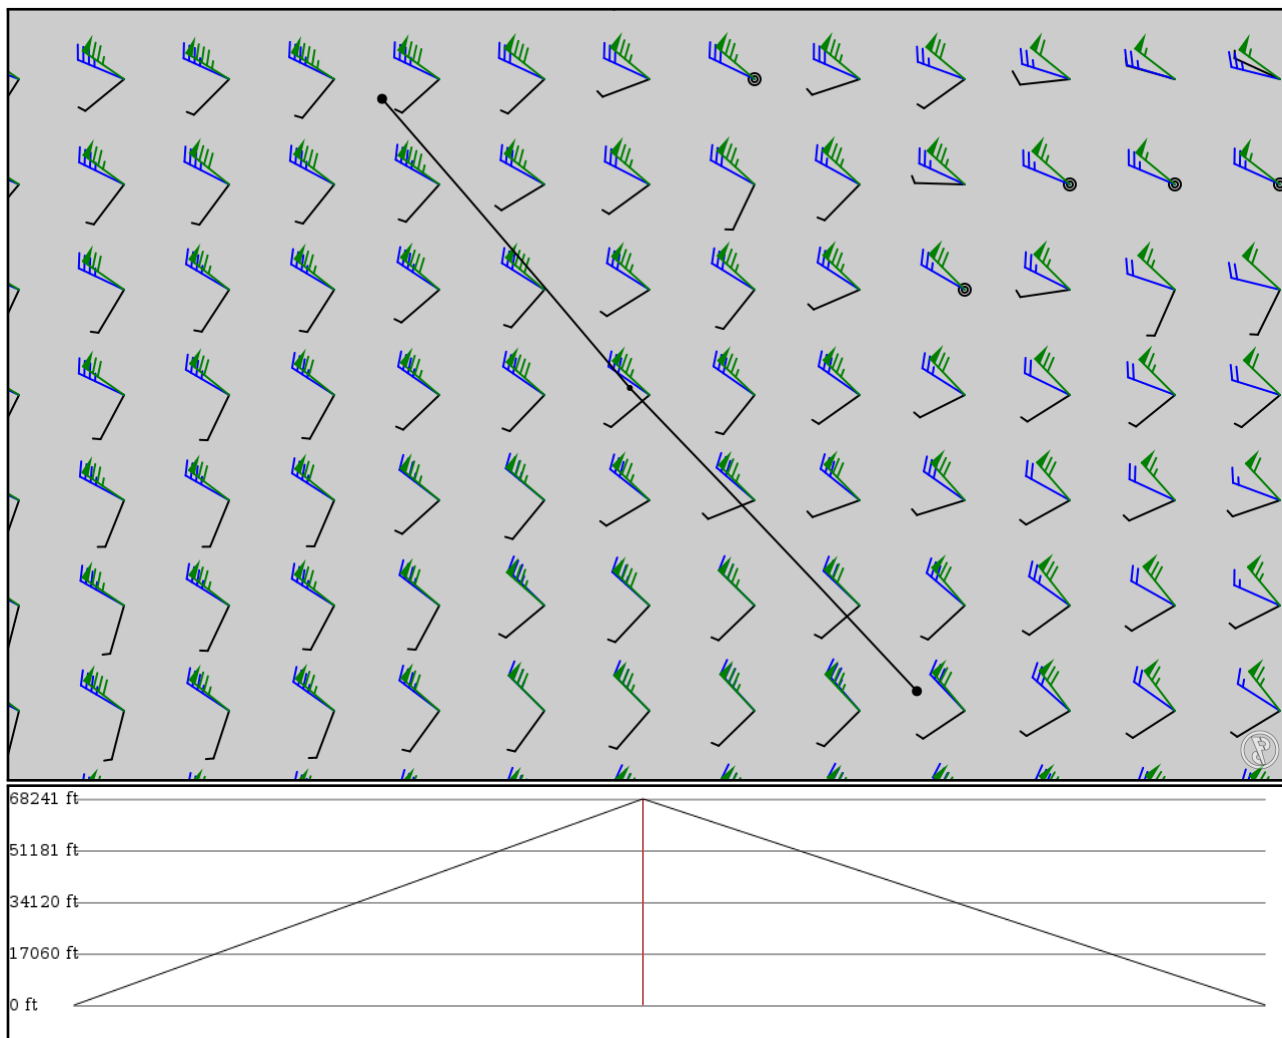

Notes

Basic altitude profile:

- Ascent Rate: 700ft/min
- Ascent Speed: 85kts
- Cruise Altitude: 10000ft
- Cruise Speed: 100kts
- Descent Rate: 500ft/min
- Descent Speed: 100kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KBNA	-	36.12390	0 ft	-	Nashville_Intl	
APT	-	-86.67788	0 m			
COMAR	-	34.90982	20,800 ft	88	-	
FIX	-	-85.63586	6,340 m			
KATL	-	33.63662	0 ft	97	Hartsfield Jackson Atlanta Intl	
APT	-	-84.42821	0 m			

KBNA

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 4

Elevation: 598 ft / 182 m
Location: 36.124500 -86.678200
Magnetic Var: 4.367 W

METAR

KBNA 111753Z 27010G18KT 10SM SCT050 SCT090 24/11 A2991 RMK A02 SLP125 T02390106 10244 20117 58013

TAF

KBNA 111724Z 1118/1218 24009G17KT P6SM FEW050 SCT080 SCT250 FM112000 30011G17KT P6SM FEW250 FM120100 32006KT P6SM

Frequencies

REC - 135.10 MHz - KBNA ATIS
GND - 121.90 MHz - NASHVILLE GROUND
APP - 119.35 MHz - NASHVILLE APPROACH
COM - 122.95 MHz - NASHVILLE UNICOM
TWR - 118.60 MHz - NASHVILLE TOWER
DEP - 118.40 MHz - NASHVILLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02C	148 ft	8,014 ft	17.92	CONCRETE	0 ft	0 ft
	45 m	2,443 m	22.29		0 m	0 m
20C	148 ft	8,014 ft	197.92	CONCRETE	0 ft	0 ft
	45 m	2,443 m	202.29		0 m	0 m
02R	148 ft	8,013 ft	17.92	CONCRETE	0 ft	0 ft
	45 m	2,442 m	22.29		0 m	0 m
20L	148 ft	8,013 ft	197.93	CONCRETE	0 ft	0 ft
	45 m	2,442 m	202.29		0 m	0 m
02L	148 ft	7,718 ft	17.59	CONCRETE	0 ft	0 ft
	45 m	2,352 m	21.95		0 m	0 m
20R	148 ft	7,718 ft	197.59	CONCRETE	0 ft	0 ft
	45 m	2,352 m	201.96		0 m	0 m
13	148 ft	11,030 ft	133.44	CONCRETE	823 ft	0 ft
	45 m	3,362 m	137.80		251 m	0 m
31	148 ft	11,030 ft	313.45	CONCRETE	761 ft	0 ft
	45 m	3,362 m	317.82		232 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02L	DME	IBNA	109.90 MHz	18 nm	-	-	599 ft
				33 km	-		599 m
02R	DME	IUQU	111.75 MHz	18 nm	-	-	599 ft
				33 km	-		599 m
20L	DME	ISSX	109.35 MHz	18 nm	-	-	599 ft
				33 km	-		599 m
02C	LOC-ILS	IEZN	110.75 MHz	18 nm	17.91	-	598 ft
				33 km	22.28		598 m
02L	LOC-ILS	IBNA	109.90 MHz	18 nm	17.57	-	548 ft
				33 km	21.94		548 m
02R	LOC-ILS	IUQU	111.75 MHz	18 nm	17.92	-	536 ft
				33 km	22.28		536 m
20L	LOC-ILS	ISSX	109.35 MHz	18 nm	197.92	-	598 ft
				33 km	202.28		598 m
20R	LOC-ILS	IVIV	111.30 MHz	18 nm	197.58	-	598 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	201.95		598 m
31	LOC-ILS	IPNO	111.95 MHz	18 nm	313.42	-	598 ft
				33 km	317.79		598 m
02C	GS	IEZN	110.75 MHz	10 nm	18.83	3.00	598 ft
				19 km	23.19		598 m
02L	GS	IBNA	109.90 MHz	10 nm	18.16	3.00	595 ft
				19 km	22.52		595 m
02R	GS	IUQU	111.75 MHz	10 nm	18.83	3.00	582 ft
				19 km	23.20		582 m
20L	GS	ISSX	109.35 MHz	10 nm	198.83	3.00	535 ft
				19 km	203.20		535 m
20R	GS	IVIY	111.30 MHz	10 nm	198.16	3.00	562 ft
				19 km	202.52		562 m
31	GS	IPNO	111.95 MHz	10 nm	313.88	3.00	575 ft
				19 km	318.24		575 m

KATL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 5

Elevation: 1,026 ft / 313 m
Location: 33.636600 -84.428000
Magnetic Var: 5.631 W

METAR

KATL 111752Z 27012G17KT 10SM FEW060 23/08 A2994 RMK A02 SLP133 T02280078 10233 20144 58008

TAF

TAF KATL 111725Z 1118/1224 30010G18KT P6SM SCT060 FM112300 29008KT P6SM FEW060 FM120100 30005KT P6SM SKC FM121400

Frequencies

REC - 119.65 MHz - D-ATIS	REC - 125.55 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 121.65 MHz - ATLANTA GROUND	GND - 121.75 MHz - ATLANTA GROUND
GND - 121.90 MHz - ATLANTA GROUND	TWR - 119.10 MHz - ATLANTA TOWER
TWR - 119.30 MHz - ATLANTA TOWER	TWR - 119.50 MHz - ATLANTA TOWER
TWR - 123.85 MHz - ATLANTA TOWER	TWR - 125.32 MHz - ATLANTA TOWER
APP - 127.90 MHz - ATLANTA APPROACH	APP - 128.00 MHz - ATLANTA APPROACH
DEP - 125.65 MHz - ATLANTA DEPARTURE	DEP - 125.70 MHz - ATLANTA DEPARTURE
DEP - 135.37 MHz - ATLANTA DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	12,400 ft	89.99	CONCRETE	0 ft	0 ft
	46 m	3,780 m	95.62		0 m	0 m
27R	151 ft	12,400 ft	270.01	CONCRETE	518 ft	0 ft
	46 m	3,780 m	275.64		158 m	0 m
09R	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
27L	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08L	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
26R	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
10	151 ft	9,008 ft	89.97	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
28	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08R	151 ft	10,009 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	95.61		0 m	0 m
26L	151 ft	10,009 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	3,051 m	275.62		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IHFV	109.30 MHz	18 nm	-	-	993 ft
				33 km	-		993 m
08R	DME	IATL	109.90 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IHZK	110.50 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
09R	DME	IFUN	108.90 MHz	18 nm	-	-	987 ft
				33 km	-		987 m
10	DME	IOMO	111.55 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
26L	DME	IBRU	108.70 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m
26R	DME	IGXZ	110.10 MHz	18 nm	-	-	1,000 ft
				33 km	-		1,000 m
27L	DME	IFSQ	108.50 MHz	18 nm	-	-	1,020 ft
				33 km	-		1,020 m
27R	DME	IAFA	111.30 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
28	DME	IPKU	111.75 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
08L	LOC-ILS	IHFV	109.30 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
08R	LOC-ILS	IATL	109.90 MHz	18 nm	89.99	-	1,026 ft
				33 km	95.62		1,026 m
09L	LOC-ILS	IHZK	110.50 MHz	18 nm	90.01	-	968 ft
				33 km	95.64		968 m
09R	LOC-ILS	IFUN	108.90 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
10	LOC-ILS	IOMO	111.55 MHz	18 nm	89.98	-	970 ft
				33 km	95.61		970 m
26L	LOC-ILS	IBRU	108.70 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
26R	LOC-ILS	IGXZ	110.10 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27L	LOC-ILS	IFSQ	108.50 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27R	LOC-ILS	IAFA	111.30 MHz	18 nm	270.00	-	1,026 ft
				33 km	275.63		1,026 m
28	LOC-ILS	IPKU	111.75 MHz	18 nm	269.97	-	970 ft
				33 km	275.60		970 m
08L	GS	IHFV	109.30 MHz	10 nm	90.96	3.00	1,008 ft
				19 km	96.59		1,008 m
08R	GS	IATL	109.90 MHz	10 nm	90.96	3.00	1,012 ft
				19 km	96.59		1,012 m
09L	GS	IHZK	110.50 MHz	10 nm	90.02	3.00	1,017 ft
				19 km	95.65		1,017 m
09R	GS	IFUN	108.90 MHz	10 nm	90.96	3.00	1,021 ft
				19 km	96.59		1,021 m
10	GS	IOMO	111.55 MHz	10 nm	90.94	3.00	985 ft
				19 km	96.57		985 m
26L	GS	IBRU	108.70 MHz	10 nm	270.96	3.00	992 ft
				19 km	276.59		992 m
26R	GS	IGXZ	110.10 MHz	10 nm	270.96	3.00	984 ft
				19 km	276.59		984 m
27L	GS	IFSQ	108.50 MHz	10 nm	270.96	3.00	990 ft
				19 km	276.59		990 m
27R	GS	IAFA	111.30 MHz	10 nm	270.02	3.00	981 ft
				19 km	275.65		981 m
28	GS	IPKU	111.75 MHz	10 nm	270.94	3.00	990 ft
				19 km	276.57		990 m