


EDDL
Duesseldorf

EGLL
London Heathrow

2024/05/04 0308Z

EDDL NIK **L610** DIBLI EGLL

273.10 nm / 505.78 km

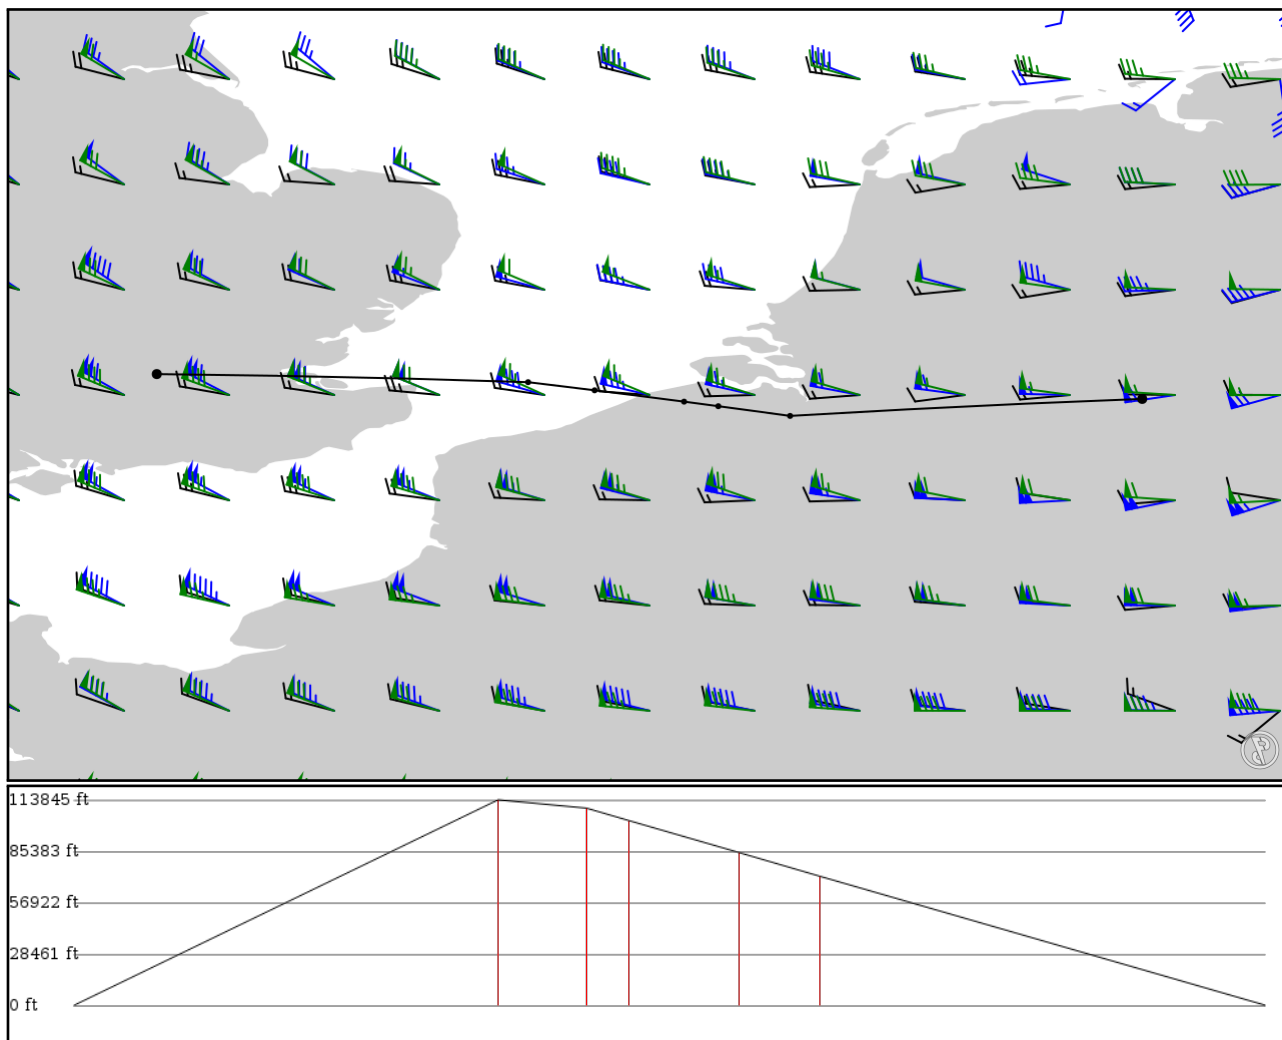

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 26000ft
- Cruise Speed: 340kts
- Descent Rate: 2000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EDDL	-	51.28942	0 ft	-	Duesseldorf
APT	-	6.76664	0 m		
NIK	-	51.16500	34,700 ft	97	NICKY VOR-DME
VOR	-	4.18389	10,577 m		
DENUT	L610	51.23611	33,300 ft	20	-
FIX	AWY-LO	3.65750	10,150 m		
LUMEN	L610	51.26946	31,200 ft	9	-
FIX	AWY-LO	3.40657	9,510 m		
BULAM	L610	51.35250	25,800 ft	25	-
FIX	AWY-LO	2.75028	7,864 m		
DIBLI	L610	51.41194	21,800 ft	18	-
FIX	AWY-LO	2.26250	6,645 m		
EGLL	-	51.47122	0 ft	102	London Heathrow
APT	-	-0.46098	0 m		

EDDL

Region: GERMANY - CIVIL
Timezone: EUROPE/BERLIN
Runways: 2

Elevation: 145 ft / 44 m
Location: 51.289400 6.766620
Magnetic Var: 2.675 E

METAR

EDDL 040220Z AUTO 14005KT CAVOK 09/07 Q1015 NOSIG

TAF

TAF AMD EDDL 040123Z 0401/0506 15009KT CAVOK TEMPO 0416/0422 VRB03KT RA PROB30 TEMPO 0422/0502 BKN014 BECMG 0422/0502

Frequencies

REC - 123.77 MHz - ATIS	CLD - 121.77 MHz - CLEARANCE DELIVERY
GND - 121.90 MHz - GROUND	GND - 121.60 MHz - GROUND
GND - 121.67 MHz - GROUND	TWR - 118.30 MHz - TOWER
TWR - 124.35 MHz - TOWER	APP - 128.55 MHz - LANGEN RADAR
APP - 121.35 MHz - LANGEN RADAR	APP - 128.50 MHz - LANGEN RADAR
APP - 128.65 MHz - DUSSELDORF DIRECTOR	DEP - 133.77 MHz - DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	148 ft	9,851 ft	52.68	CONCRETE	984 ft	659 ft
	45 m	3,003 m	50.00		300 m	201 m
23L	148 ft	9,851 ft	232.71	CONCRETE	984 ft	702 ft
	45 m	3,003 m	230.03		300 m	214 m
05L	148 ft	8,866 ft	52.68	CONCRETE	994 ft	906 ft
	45 m	2,702 m	50.00		303 m	276 m
23R	148 ft	8,866 ft	232.70	CONCRETE	971 ft	928 ft
	45 m	2,702 m	230.03		296 m	283 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	LOC-ILS	IDNE	110.95 MHz	18 nm	52.69	-	145 ft
				33 km	50.02		145 m
05R	LOC-ILS	IDSE	110.15 MHz	18 nm	52.70	-	145 ft
				33 km	50.03		145 m
23L	LOC-ILS	IDSW	109.90 MHz	18 nm	232.70	-	145 ft
				33 km	230.03		145 m
23R	LOC-ILS	IDNW	109.30 MHz	18 nm	232.69	-	145 ft
				33 km	230.02		145 m
05L	GS	IDNE	110.95 MHz	10 nm	52.69	3.00	145 ft
				19 km	50.02		145 m
05R	GS	IDSE	110.15 MHz	10 nm	52.70	3.00	145 ft
				19 km	50.03		145 m
23L	GS	IDSW	109.90 MHz	10 nm	232.70	3.00	145 ft
				19 km	230.03		145 m
23R	GS	IDNW	109.30 MHz	10 nm	232.69	3.00	145 ft
				19 km	230.02		145 m

EGLL

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 2

Elevation: 83 ft / 25 m
Location: 51.471200 -0.460881
Magnetic Var: 0.375 E

METAR

EGLL 040220Z AUTO 22005KT 9999 OVC008 09/08 Q1011

TAF

TAF AMD EGLL 040128Z 0401/0506 20005KT 9999 SCT010 TEMPO 0401/0407 8000 BKN008 PROB30 0403/0407 4000 BR BKN004 PROB30 0405/0407 4000 BR BKN004

Frequencies

REC - 128.07 MHz - HEATHROW INFORMATION	REC - 121.92 MHz - HEATHROW INFORMATION
CLD - 121.97 MHz - HEATHROW DELIVERY	GND - 121.70 MHz - HEATHROW GROUND
GND - 121.85 MHz - HEATHROW GROUND	GND - 121.90 MHz - HEATHROW GROUND
TWR - 118.50 MHz - HEATHROW TOWER	TWR - 118.70 MHz - HEATHROW TOWER
TWR - 124.47 MHz - HEATHROW TOWER	APP - 119.72 MHz - HEATHROW DIRECTOR
APP - 120.40 MHz - HEATHROW DIRECTOR	APP - 134.97 MHz - HEATHROW DIRECTOR
APP - 125.62 MHz - HEATHROW RADAR	APP - 127.52 MHz - HEATHROW RADAR
DEP - 120.52 MHz - HEATHROW DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	164 ft	12,770 ft	89.66	ASPHALT	1,007 ft	0 ft
	50 m	3,892 m	89.29		307 m	0 m
27R	164 ft	12,770 ft	269.70	ASPHALT	0 ft	177 ft
	50 m	3,892 m	269.33		0 m	54 m
09R	164 ft	11,975 ft	89.68	ASPHALT	1,004 ft	0 ft
	50 m	3,650 m	89.31		306 m	0 m
27L	164 ft	11,975 ft	269.72	ASPHALT	0 ft	95 ft
	50 m	3,650 m	269.35		0 m	29 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IAA	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09R	DME	IBB	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27L	DME	ILL	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27R	DME	IRR	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09L	LOC-ILS	IAA	110.30 MHz	18 nm	89.68	-	83 ft
				33 km	89.31		83 m
09R	LOC-ILS	IBB	109.50 MHz	18 nm	89.70	-	83 ft
				33 km	89.33		83 m
27L	LOC-ILS	ILL	109.50 MHz	18 nm	269.70	-	83 ft
				33 km	269.33		83 m
27R	LOC-ILS	IRR	110.30 MHz	18 nm	269.68	-	83 ft
				33 km	269.31		83 m
09L	GS	IAA	110.30 MHz	10 nm	89.68	3.00	83 ft
				19 km	89.31		83 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	GS	IBB	109.50 MHz	10 nm	89.70	3.00	83 ft
				19 km	89.33		83 m
27L	GS	ILL	109.50 MHz	10 nm	269.70	3.00	83 ft
				19 km	269.33		83 m
27R	GS	IRR	110.30 MHz	10 nm	269.68	3.00	83 ft
				19 km	269.31		83 m