


2024/06/07 1601Z

EGLC HON **L6** MALUD EGAC

284.26 nm / 526.44 km

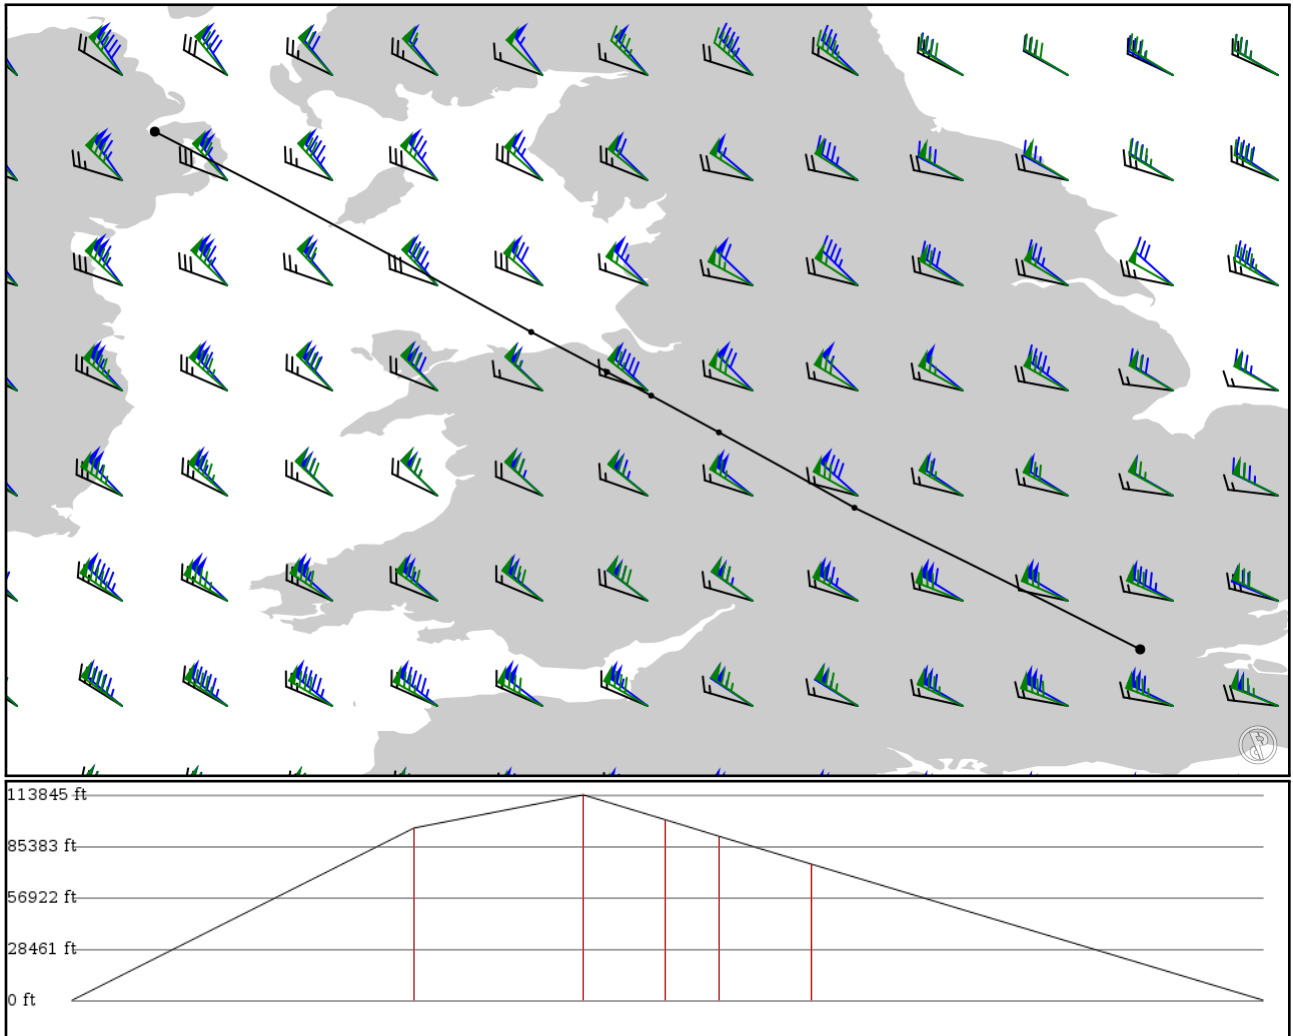

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 210kts
- Cruise Altitude: 25000ft
- Cruise Speed: 260kts
- Descent Rate: 2000ft/min
- Descent Speed: 210kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EGLC APT	-	51.50523 0.05518	0 ft 0 m	-	London City
HON VOR	-	52.35667 -1.66361	29,100 ft 8,870 m	81	HONILEY VOR-DME
KEPAD FIX	L6 AWY-LO	52.80972 -2.47889	34,700 ft 10,577 m	40	-
RISLA FIX	L6 AWY-LO	53.03083 -2.88667	30,500 ft 9,296 m	19	-
DOGIT FIX	L6 AWY-LO	53.17278 -3.15194	27,700 ft 8,443 m	12	-
MALUD FIX	L6 AWY-LO	53.41333 -3.60833	23,000 ft 7,010 m	21	-
EGAC APT	-	54.61811 -5.87258	0 ft 0 m	107	Belfast City

EGLC

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 19 ft / 6 m
Location: 51.505200 0.055176
Magnetic Var: 0.560 E

METAR

EGLC 071520Z AUTO 24009KT 9999 NCD 19/07 Q1017

TAF

UNKNOWN

Frequencies

APP - 132.70 MHz - THAMES RADAR
GND - 121.82 MHz - CITY GROUND
TWR - 129.45 MHz - CITY TOWER

REC - 136.35 MHz - CITY ATIS
TWR - 118.07 MHz - CITY TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	98 ft	4,916 ft	92.88	ASPHALT	315 ft	190 ft
	30 m	1,498 m	92.32		96 m	58 m
27	98 ft	4,916 ft	272.90	ASPHALT	230 ft	302 ft
	30 m	1,498 m	272.34		70 m	92 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09	DME	ILST	111.15 MHz	18 nm	-	-	48 ft
				33 km	-		48 m
27	DME	ILSR	111.15 MHz	18 nm	-	-	48 ft
				33 km	-		48 m
09	LOC-ILS	ILST	111.15 MHz	18 nm	92.89	-	19 ft
				33 km	92.33		19 m
27	LOC-ILS	ILSR	111.15 MHz	18 nm	272.89	-	19 ft
				33 km	272.33		19 m
09	GS	ILST	111.15 MHz	10 nm	92.89	5.50	19 ft
				19 km	92.33		19 m
27	GS	ILSR	111.15 MHz	10 nm	272.89	5.50	19 ft
				19 km	272.33		19 m

EGAC

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 15 ft / 5 m
Location: 54.618100 -5.872440
Magnetic Var: 2.000 W

METAR

EGAC 071520Z AUTO 25007KT 220V310 9999 NCD 13/06 Q1013

TAF

UNKNOWN

Frequencies

APP - 130.85 MHz - BELFAST APPROACH
REC - 134.80 MHz - BELFAST RADAR

TWR - 122.82 MHz - BELFAST TOWER
REC - 136.62 MHz - BELFAST INFORMATION

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	150 ft	5,946 ft	34.69	ASPHALT	256 ft	0 ft
	46 m	1,812 m	36.69		78 m	0 m
22	150 ft	5,946 ft	214.70	ASPHALT	0 ft	0 ft
	46 m	1,812 m	216.70		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	HBD	108.10 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
22	DME	IBFH	108.10 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
22	LOC-ILS	IBFH	108.10 MHz	18 nm	214.70	-	15 ft
				33 km	216.70		15 m
04	LOC-ILS	IHBD	108.10 MHz	18 nm	34.70	-	15 ft
				33 km	36.70		15 m
22	GS	IBFH	108.10 MHz	10 nm	216.70	3.00	15 ft
				19 km	218.70		15 m
04	GS	IHBD	108.10 MHz	10 nm	34.70	3.00	15 ft
				19 km	36.70		15 m