

WICT

Tanjung Karang Branti Radin Inten II


WIII

Jakarta Sukarno-Hatta Intl

2024/05/13 1020Z

WICT TKG WIII

103.08 nm / 190.91 km

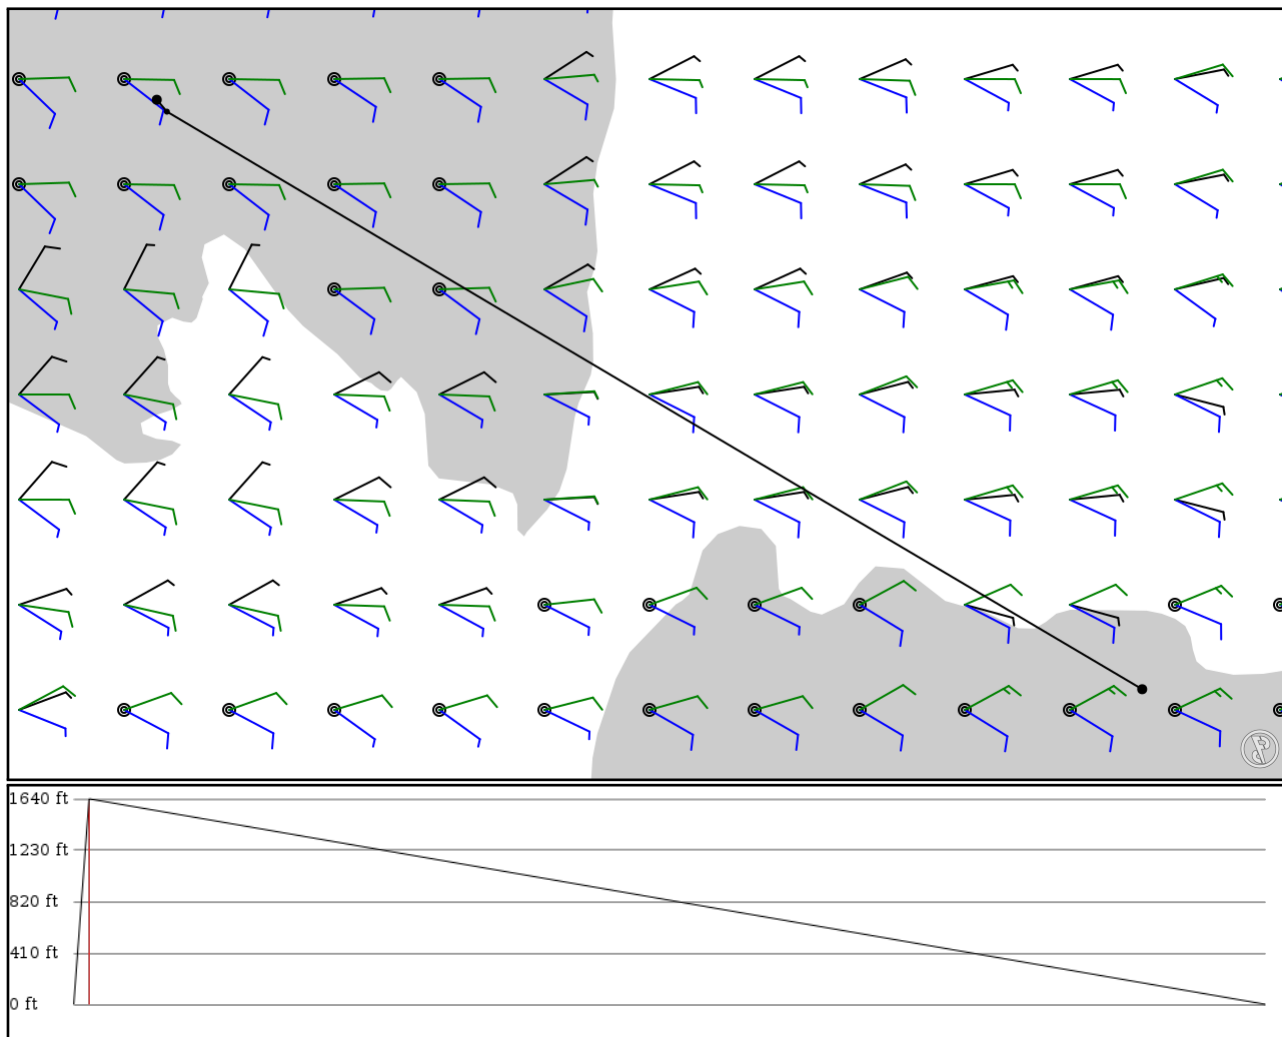

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 7000ft
- Cruise Speed: 420kts
- Descent Rate: 1800ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
WICT	-	-5.24234	0 ft	-		Tanjung Karang Branti Radin Inten II
APT	-	105.17894	0 m			
TKG	-	-5.26017	500 ft	1		BANDAR LAMPUNG VOR-DME
VOR	-	105.19412	152 m			
WIII	-	-6.12574	0 ft	101		Jakarta Sukarno-Hatta Intl
APT	-	106.65640	0 m			

WIII

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 3

Elevation: 34 ft / 10 m
Location: -6.119810 106.657000
Magnetic Var: 0.529 E

METAR

WIII 131000Z 05012G22KT 9999 FEW018CB SCT020 31/25 Q1006 NOSIG RMK CB TO S

TAF

TAF WIII 130500Z 1306/1412 VRB04KT 8000 SCT020 TEMPO 1307/1309 33008KT 4000 TSRA FEW016CB BKN020 BECMG 1310/1312 O

Frequencies

REC - 126.85 MHz - ATIS	CLD - 121.95 MHz -
CLD - 124.25 MHz -	SOEKARNO-HATTA CLEARANCE DELIVERY
SOEKARNO-HATTA CLEARANCE DELIVERY	CLD - 125.15 MHz -
GND - 121.60 MHz - SOEKARNO-HATTA GROUND	SOEKARNO-HATTA CLEARANCE DELIVERY
GND - 128.85 MHz - SOEKARNO-HATTA GROUND	GND - 121.00 MHz - SOEKARNO-HATTA GROUND
TWR - 118.20 MHz - SOEKARNO-HATTA TOWER	GND - 128.95 MHz - SOEKARNO-HATTA GROUND
TWR - 119.30 MHz - SOEKARNO-HATTA TOWER	TWR - 118.75 MHz - SOEKARNO-HATTA TOWER
APP - 124.20 MHz - JAKARTA ARRIVAL	TWR - 120.25 MHz - SOEKARNO-HATTA TOWER
APP - 119.75 MHz - JAKARTA DIRECTOR	APP - 125.45 MHz - JAKARTA ARRIVAL
APP - 124.55 MHz - JAKARTA DIRECTOR	APP - 123.75 MHz - JAKARTA DIRECTOR
APP - 125.05 MHz - JAKARTA DIRECTOR	APP - 124.95 MHz - JAKARTA DIRECTOR
APP - 124.15 MHz - JAKARTA RADAR	APP - 127.90 MHz - JAKARTA DIRECTOR
APP - 125.35 MHz - JAKARTA RADAR	APP - 124.35 MHz - JAKARTA RADAR
APP - 127.95 MHz - JAKARTA RADAR	APP - 126.45 MHz - JAKARTA RADAR
	APP - 130.10 MHz - JAKARTA RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	8,202 ft	68.13	ASPHALT	328 ft	846 ft
	46 m	2,500 m	67.61		100 m	258 m
24	150 ft	8,202 ft	248.13	ASPHALT	0 ft	0 ft
	46 m	2,500 m	247.60		0 m	0 m
07L	197 ft	11,820 ft	68.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	67.62		0 m	0 m
25R	197 ft	11,820 ft	248.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	247.62		0 m	0 m
07R	197 ft	12,015 ft	68.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	67.59		0 m	0 m
25L	197 ft	12,015 ft	248.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	247.59		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	ICHL	111.50 MHz	18 nm	68.13	-	21 ft
				33 km	67.60		21 m
07R	LOC-ILS	ICHR	110.50 MHz	18 nm	68.13	-	27 ft
				33 km	67.60		27 m
25L	LOC-ILS	ICGL	111.10 MHz	18 nm	248.12	-	34 ft
				33 km	247.59		34 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	LOC-ILS	ICGR	110.90 MHz	18 nm	248.13	-	29 ft
				33 km	247.60		29 m
07L	GS	ICHL	111.50 MHz	10 nm	68.25	3.00	29 ft
				19 km	67.72		29 m
07R	GS	ICHR	110.50 MHz	10 nm	68.24	3.00	34 ft
				19 km	67.71		34 m
25L	GS	ICGL	111.10 MHz	10 nm	248.24	3.00	27 ft
				19 km	247.71		27 m
25R	GS	ICGR	110.90 MHz	10 nm	248.25	3.00	21 ft
				19 km	247.72		21 m