


2024/05/09 0543Z

RJSN FINCH R217 SDE15 RJSS

86.04 nm / 159.34 km

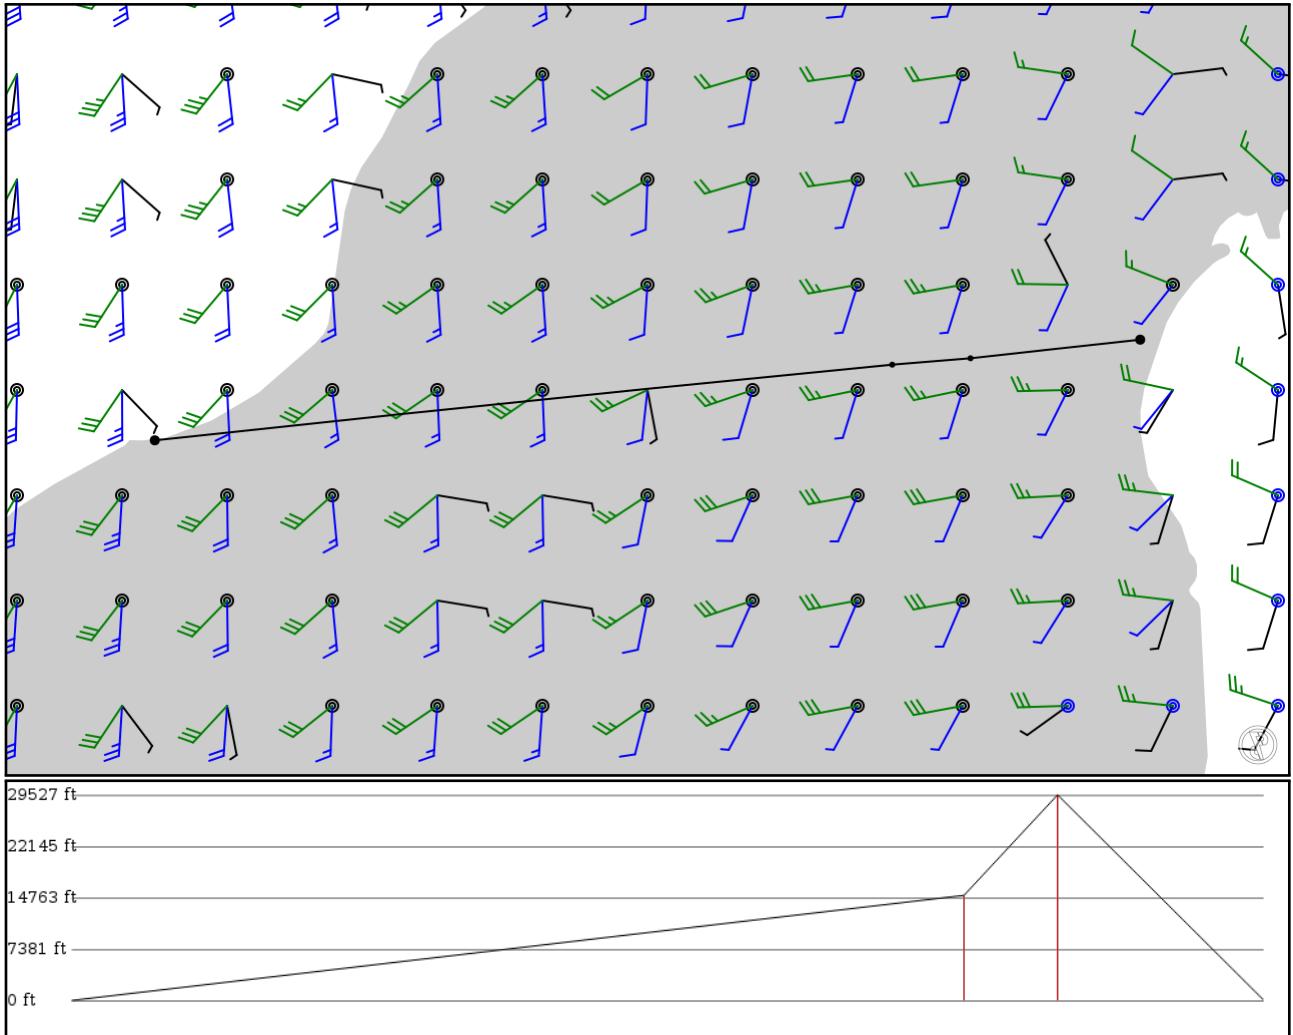

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 90ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJSN	-	37.95480	0 ft	-	NIIGATA
APT	-	139.11423	0 m		
FINCH	-	38.09307	4,600 ft	64	-
FIX	-	140.46427	1,402 m		
SDE15	R217	38.10472	9,000 ft	6	-
FIX	AWY-LO	140.60759	2,743 m		
RJSS	-	38.13873	0 ft	14	SENDAI
APT	-	140.91825	0 m		

RJSN

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 28 ft / 9 m
Location: 37.954800 139.114000
Magnetic Var: 8.656 W

METAR

RJSN 090500Z 34006KT 300V030 9999 SCT035 BKN048 12/05 Q1016

TAF

TAF RJSN 082315Z 0900/1006 34012KT 9999 FEW030 BECMG 0909/0911 16006KT BECMG 0918/0921 19008KT

Frequencies

REC - 128.45 MHz - ATIS
TWR - 118.00 MHz -
DEP - 119.05 MHz -
TWR - 126.20 MHz -
APP - 121.40 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	150 ft	8,185 ft	92.69	ASPHALT	0 ft	194 ft
	46 m	2,495 m	101.34		0 m	59 m
28	150 ft	8,185 ft	272.70	ASPHALT	0 ft	223 ft
	46 m	2,495 m	281.36		0 m	68 m
04	150 ft	4,321 ft	31.80	ASPHALT	0 ft	200 ft
	46 m	1,317 m	40.45		0 m	61 m
22	150 ft	4,321 ft	211.80	ASPHALT	0 ft	184 ft
	46 m	1,317 m	220.46		0 m	56 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	DME	INC	109.30 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
28	LOC-ILS	INC	109.30 MHz	18 nm	272.69	-	33 ft
				33 km	281.34		33 m
28	GS	INC	109.30 MHz	10 nm	273.39	3.00	58 ft
				19 km	282.05		58 m

RJSS

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 15 ft / 5 m
Location: 38.138700 140.918000
Magnetic Var: 8.416 W

METAR

RJSS 090500Z 11007KT 050V160 9999 FEW030 BKN050 16/08 Q1012

TAF

TAF RJSS 082315Z 0900/1006 34004KT 9999 FEW020 BKN040 BECMG 0900/0902 12008KT BECMG 0907/0909 30010KT BECMG 1000/

Frequencies

REC - 126.45 MHz - ATIS
TWR - 118.70 MHz -
DEP - 120.00 MHz -
GND - 121.70 MHz -
APP - 120.40 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	148 ft	9,853 ft	82.52	ASPHALT	0 ft	200 ft
	45 m	3,003 m	90.94		0 m	61 m
27	148 ft	9,853 ft	262.54	ASPHALT	0 ft	200 ft
	45 m	3,003 m	270.96		0 m	61 m
12	148 ft	3,941 ft	117.78	ASPHALT	0 ft	0 ft
	45 m	1,201 m	126.19		0 m	0 m
30	148 ft	3,941 ft	297.79	ASPHALT	0 ft	0 ft
	45 m	1,201 m	306.20		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
27	DME	ISD	111.70 MHz	18 nm	-	-	29 ft
				33 km	-		29 m
27	LOC-ILS	ISD	111.70 MHz	18 nm	262.53	-	15 ft
				33 km	270.95		15 m
27	GS	ISD	111.70 MHz	10 nm	262.53	3.00	15 ft
				19 km	270.95		15 m