


2024/06/04 0450Z

KDEN LOZUL **V160** HBU **J128** TBC **J236** TRM KSAN

745.79 nm / 1381.20 km

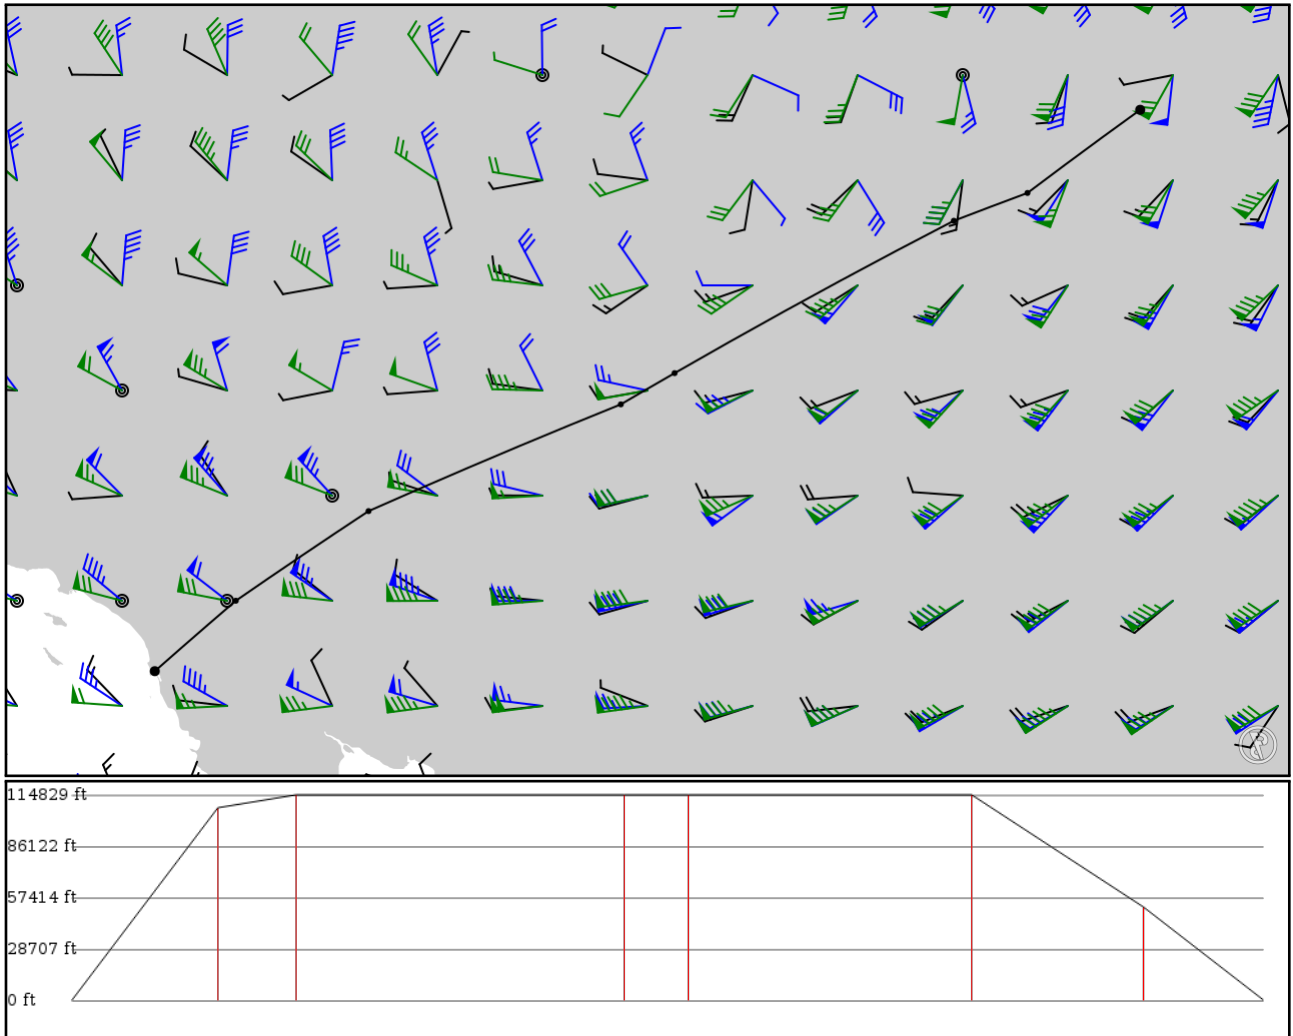

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 36000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDEN	-	39.86098	0 ft	-	Denver Intl
APT	-	-104.67189	0 m		
LOZUL	-	38.80542	32,800 ft	91	-
FIX	-	-106.10416	9,997 m		
HBU	V160	38.45215	35,000 ft	48	BLUE MESA VOR-DME
DME	AWY-LO	-107.03979	10,668 m		
LRAIN	J128	36.51783	35,000 ft	205	-
FIX	AWY-HI	-110.58665	10,668 m		
TBC	J128	36.12131	35,000 ft	40	TUBA CITY VORTAC
DME	AWY-HI	-111.26959	10,668 m		
EED	J236	34.76600	35,000 ft	176	NEEDLES VORTAC
VOR	AWY-HI	-114.47411	10,668 m		
TRM	J236	33.62808	15,900 ft	108	THERMAL VORTAC
VOR	AWY-HI	-116.16019	4,846 m		
KSAN	-	32.73356	0 ft	74	San Diego Intl
APT	-	-117.18966	0 m		

KDEN

Region: UNITED STATES
Timezone: AMERICA/DENVER
Runways: 6

Elevation: 5,429 ft / 1,655 m
Location: 39.861000 -104.672000
Magnetic Var: 7.387 E

METAR

KDEN 040353Z 27019G24KT 10SM FEW090 OVC130 26/02 A2979 RMK A02 PK WND 29035/0321 WSHFT 0256 SLP994 T02560017

TAF

KDEN 040249Z 0403/0506 20011KT P6SM VCSH BKN100 BKN160 TEMPO 0403/0404 VRB16G28KT FM040400 33011G18KT P6SM VCSH S

Frequencies

REC - 134.02 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.75 MHz - CLEARANCE DELIVERY	GND - 121.85 MHz - DENVER GROUND
GND - 127.50 MHz - DENVER GROUND	TWR - 132.35 MHz - DENVER TOWER
TWR - 133.30 MHz - DENVER TOWER	TWR - 128.75 MHz - DENVER TOWER
TWR - 135.30 MHz - DENVER TOWER	APP - 119.30 MHz - DENVER APPROACH
APP - 120.35 MHz - DENVER APPROACH	DEP - 126.10 MHz - DENVER DEPARTURE
DEP - 127.05 MHz - DENVER DEPARTURE	DEP - 128.25 MHz - DENVER DEPARTURE
DEP - 128.45 MHz - DENVER DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16R	200 ft	16,016 ft	180.50	CONCRETE	0 ft	410 ft
	61 m	4,882 m	173.11		0 m	125 m
34L	200 ft	16,016 ft	0.50	CONCRETE	0 ft	410 ft
	61 m	4,882 m	353.11		0 m	125 m
16L	151 ft	12,013 ft	180.51	CONCRETE	0 ft	413 ft
	46 m	3,662 m	173.12		0 m	126 m
34R	151 ft	12,013 ft	0.51	CONCRETE	0 ft	394 ft
	46 m	3,662 m	353.12		0 m	120 m
17R	151 ft	12,013 ft	180.53	CONCRETE	0 ft	413 ft
	46 m	3,662 m	173.14		0 m	126 m
35L	151 ft	12,013 ft	0.53	CONCRETE	0 ft	400 ft
	46 m	3,662 m	353.14		0 m	122 m
17L	151 ft	12,013 ft	180.54	CONCRETE	0 ft	404 ft
	46 m	3,662 m	173.16		0 m	123 m
35R	151 ft	12,013 ft	0.54	CONCRETE	0 ft	400 ft
	46 m	3,662 m	353.16		0 m	122 m
07	151 ft	12,013 ft	90.50	CONCRETE	0 ft	377 ft
	46 m	3,662 m	83.11		0 m	115 m
25	151 ft	12,013 ft	270.52	CONCRETE	0 ft	374 ft
	46 m	3,662 m	263.14		0 m	114 m
08	151 ft	12,013 ft	90.54	CONCRETE	0 ft	367 ft
	46 m	3,662 m	83.15		0 m	112 m
26	151 ft	12,013 ft	270.56	CONCRETE	0 ft	400 ft
	46 m	3,662 m	263.18		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	DME	IDZG	111.55 MHz	18 nm	-	-	5,352 ft
				33 km	-		5,352 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IFUI	108.90 MHz	18 nm 33 km	- -	-	5,345 ft 5,345 m
16L	DME	ILTT	111.10 MHz	18 nm 33 km	- -	-	5,347 ft 5,347 m
16R	DME	IDQQ	111.90 MHz	18 nm 33 km	- -	-	5,311 ft 5,311 m
17L	DME	IBXP	110.15 MHz	18 nm 33 km	- -	-	5,328 ft 5,328 m
17R	DME	IACX	108.50 MHz	18 nm 33 km	- -	-	5,390 ft 5,390 m
25	DME	IERP	111.55 MHz	18 nm 33 km	- -	-	5,352 ft 5,352 m
26	DME	IJOY	108.90 MHz	18 nm 33 km	- -	-	5,300 ft 5,300 m
34L	DME	IDXU	111.90 MHz	18 nm 33 km	- -	-	5,311 ft 5,311 m
34R	DME	IOUF	111.10 MHz	18 nm 33 km	- -	-	5,349 ft 5,349 m
35L	DME	IAQD	108.50 MHz	18 nm 33 km	- -	-	5,421 ft 5,421 m
35R	DME	IDPP	110.15 MHz	18 nm 33 km	- -	-	5,360 ft 5,360 m
07	LOC-ILS	IDZG	111.55 MHz	18 nm 33 km	90.51 83.12	-	5,431 ft 5,431 m
08	LOC-ILS	IFUI	108.90 MHz	18 nm 33 km	90.55 83.16	-	5,431 ft 5,431 m
16L	LOC-ILS	ILTT	111.10 MHz	18 nm 33 km	180.51 173.12	-	5,431 ft 5,431 m
16R	LOC-ILS	IDQQ	111.90 MHz	18 nm 33 km	180.50 173.11	-	5,431 ft 5,431 m
17L	LOC-ILS	IBXP	110.15 MHz	18 nm 33 km	180.53 173.14	-	5,431 ft 5,431 m
17R	LOC-ILS	IACX	108.50 MHz	18 nm 33 km	180.53 173.14	-	5,431 ft 5,431 m
25	LOC-ILS	IERP	111.55 MHz	18 nm 33 km	270.51 263.12	-	5,431 ft 5,431 m
26	LOC-ILS	IJOY	108.90 MHz	18 nm 33 km	270.55 263.16	-	5,431 ft 5,431 m
34L	LOC-ILS	IDXU	111.90 MHz	18 nm 33 km	0.50 353.11	-	5,431 ft 5,431 m
34R	LOC-ILS	IOUF	111.10 MHz	18 nm 33 km	0.51 353.12	-	5,431 ft 5,431 m
35L	LOC-ILS	IAQD	108.50 MHz	18 nm 33 km	0.53 353.14	-	5,431 ft 5,431 m
35R	LOC-ILS	IDPP	110.15 MHz	18 nm 33 km	0.53 353.14	-	5,431 ft 5,431 m
07	GS	IDZG	111.55 MHz	10 nm 19 km	90.51 83.12	3.00	5,431 ft 5,431 m
08	GS	IFUI	108.90 MHz	10 nm 19 km	90.55 83.16	3.00	5,431 ft 5,431 m
16L	GS	ILTT	111.10 MHz	10 nm 19 km	180.51 173.12	3.00	5,431 ft 5,431 m
16R	GS	IDQQ	111.90 MHz	10 nm 19 km	180.50 173.11	3.00	5,431 ft 5,431 m
17L	GS	IBXP	110.15 MHz	10 nm 19 km	180.53 173.14	3.00	5,431 ft 5,431 m
17R	GS	IACX	108.50 MHz	10 nm 19 km	180.53 173.14	3.00	5,431 ft 5,431 m
25	GS	IERP	111.55 MHz	10 nm 19 km	270.51 263.12	3.00	5,431 ft 5,431 m
26	GS	IJOY	108.90 MHz	10 nm	270.55	3.00	5,431 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	263.16		5,431 m
34L	GS	IDXU	111.90 MHz	10 nm	0.50	3.00	5,431 ft
				19 km	353.11		5,431 m
34R	GS	IOUF	111.10 MHz	10 nm	0.51	3.00	5,431 ft
				19 km	353.12		5,431 m
35L	GS	IAQD	108.50 MHz	10 nm	0.53	3.00	5,431 ft
				19 km	353.14		5,431 m
35R	GS	IDPP	110.15 MHz	10 nm	0.53	3.00	5,431 ft
				19 km	353.14		5,431 m

KSAN

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 1

Elevation: 17 ft / 5 m
Location: 32.733600 -117.190000
Magnetic Var: 10.964 E

METAR

KSAN 040351Z 20004KT 10SM OVC016 17/13 A2989 RMK A02 SLP120 T01720128 \$

TAF

TAF KSAN 040159Z 0402/0506 21008KT P6SM SCT017 BKN250 TEMPO 0402/0404 BKN017 FM040400 19007KT P6SM OVC014 FM042000

Frequencies

REC - 134.80 MHz - LINDBERGH ATIS	CLD - 125.90 MHz - LINDBERGH CLEARANCE
GND - 123.90 MHz - LINDBERGH GROUND	TWR - 118.30 MHz - LINDBERGH TOWER
DEP - 119.60 MHz - SOCAL WEST DEPARTURE	DEP - 124.35 MHz - SOCAL EAST DEPARTURE
APP - 119.60 MHz - SOCAL WEST APPROACH	APP - 124.35 MHz - SOCAL EAST APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	200 ft	9,388 ft	106.13	ASPHALT	1,004 ft	390 ft
	61 m	2,861 m	95.17		306 m	119 m
27	200 ft	9,388 ft	286.15	ASPHALT	1,811 ft	0 ft
	61 m	2,861 m	275.18		552 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09	DME	ISAN	111.55 MHz	18 nm	-	-	29 ft
				33 km	-		29 m
27	DME	IUBR	110.90 MHz	18 nm	-	-	26 ft
				33 km	-		26 m
09	LOC-ILS	ISAN	111.55 MHz	18 nm	106.14	-	17 ft
				33 km	95.18		17 m
27	LOC-LOC	IUBR	110.90 MHz	18 nm	286.14	-	17 ft
				33 km	275.18		17 m
09	GS	ISAN	111.55 MHz	10 nm	106.14	3.10	17 ft
				19 km	95.18		17 m