

PANC

Ted Stevens Anchorage Intl


PADG

RED DOG

2024/05/08 0153Z

PANC ANC **J133** GAL **J117** OTZ PADG

547.29 nm / 1013.58 km

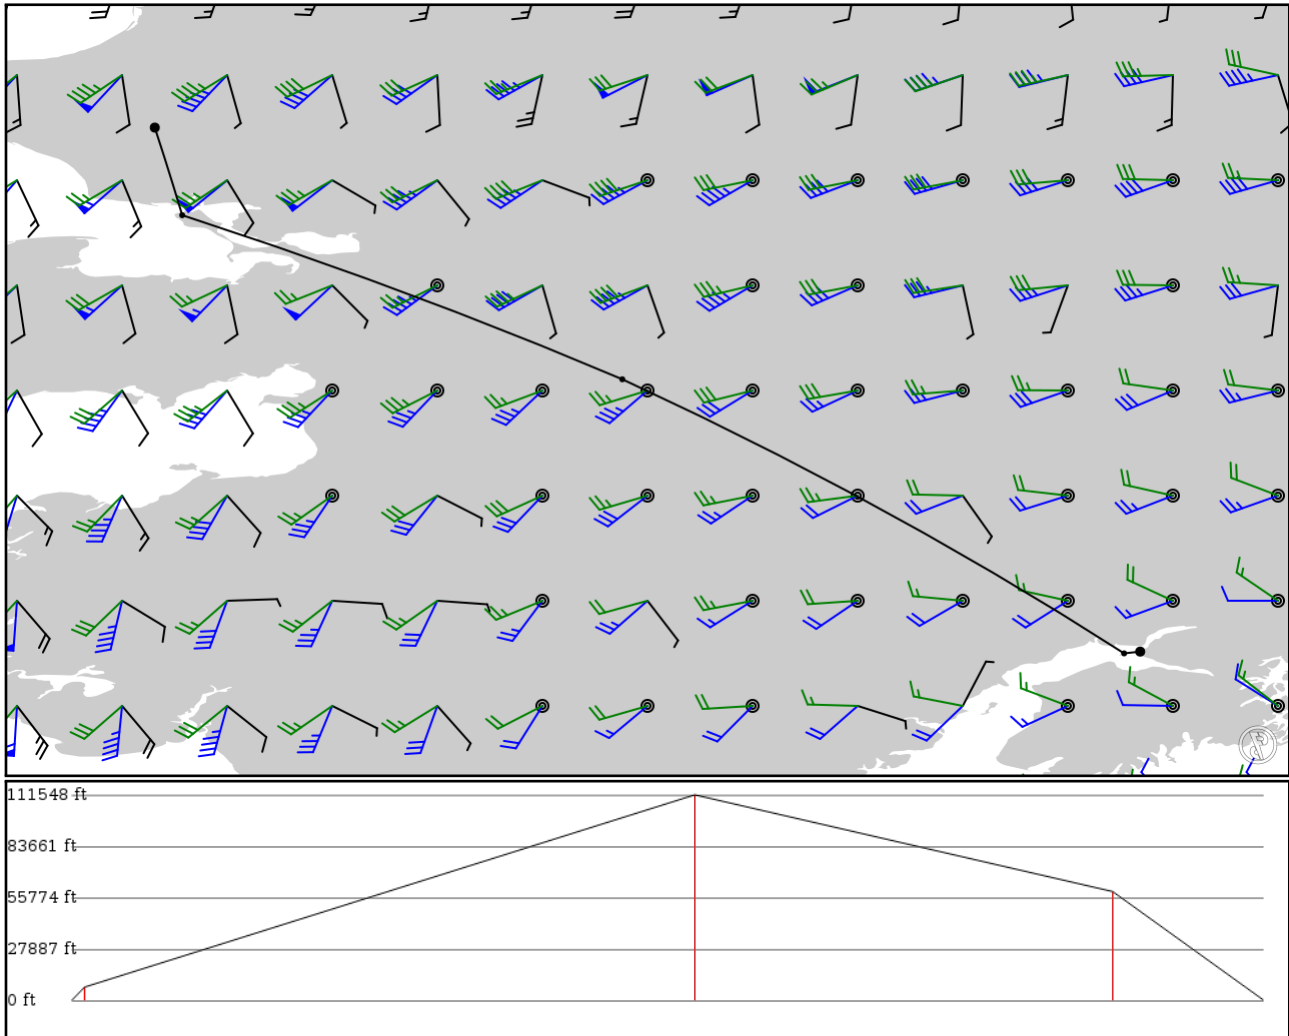

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 32000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC APT	-	61.17411 -149.99598	0 ft 0 m	-	Ted Stevens Anchorage Intl
ANC VOR	-	61.15081 -150.20656	2,200 ft 671 m	6	-
GAL VOR	J133 AWY-HI	64.73814 -156.77714	34,000 ft 10,363 m	280	GALENA VOR-DME
OTZ VOR	J117 AWY-HI	66.88569 -162.53994	18,000 ft 5,486 m	191	KOTZEBUE VOR-DME
PADG APT	-	68.03210 -162.89918	0 ft 0 m	69	RED DOG

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.027 E

METAR

PANC 080053Z 16014G26KT 10SM FEW050 SCT075 BKN120 09/02 A2963

TAF

PANC 072324Z 0800/0906 16012G20KT P6SM VCSH BKN080 FM080500 15008KT P6SM SCT080 BKN120 FM081200 34004KT P6SM FEW0

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.81		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.88		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.85		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.90		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.86		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.87		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.84		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.87		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.87		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.84		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.87		151 m