


2024/05/01 0156Z

FMEE ALUNA **UR401** NIBIS **UR401F** AMBAN **UR401** AXINA **UR401G** SUHIL **R401** KURTA OMDB

2784.28 nm / 5156.49 km

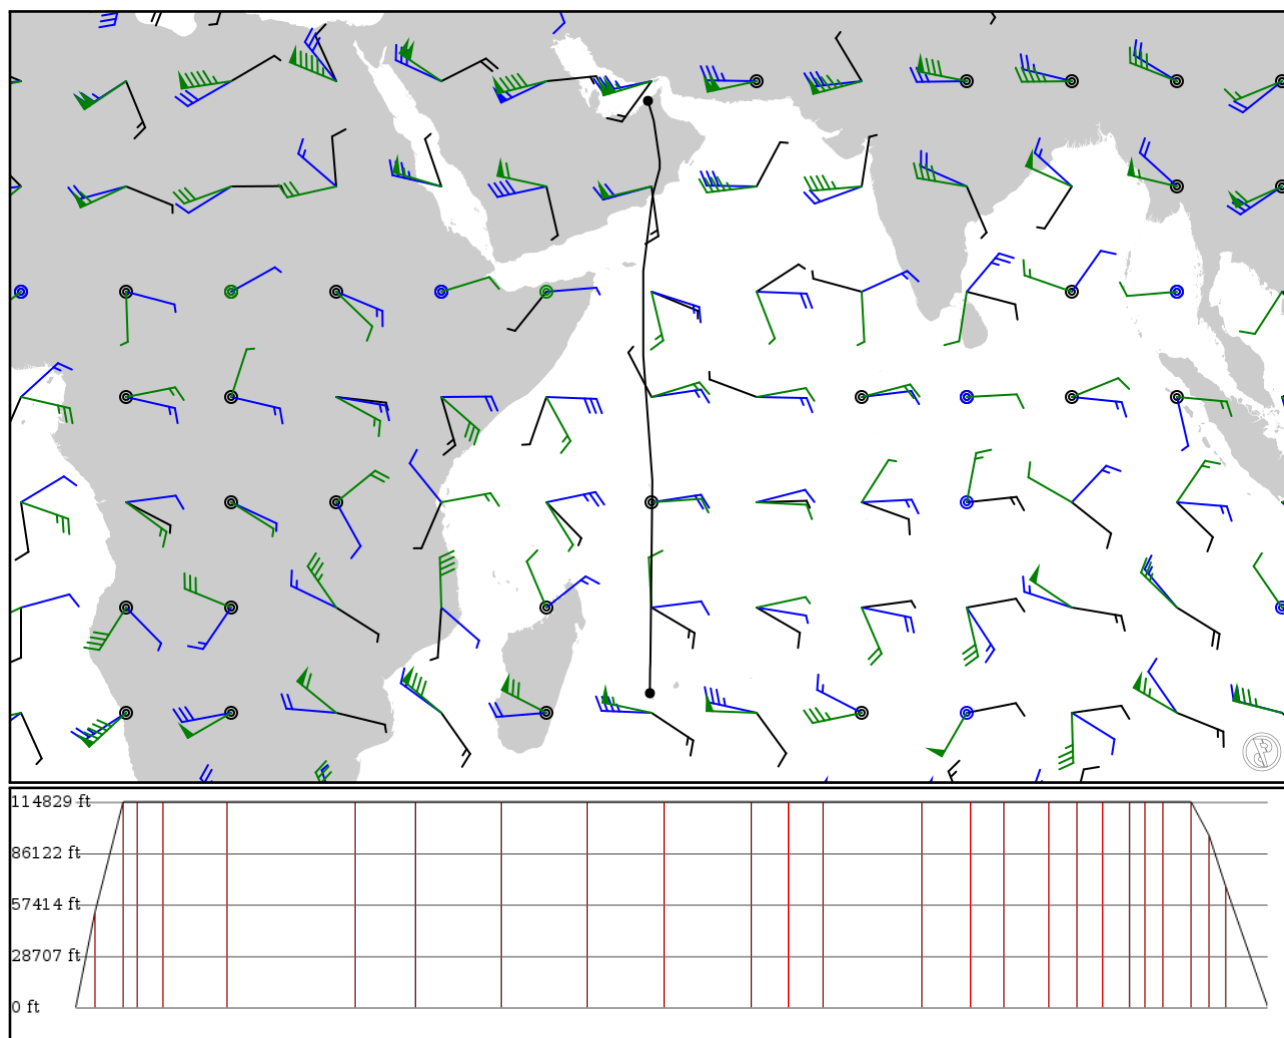

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FMEE	-	-20.88931	0 ft	-	St Denis Gillot
APT	-	55.51775	0 m		
ALUNA	-	-20.13281	16,200 ft	45	-
FIX	-	55.51944	4,938 m		
NIBIS	UR401	-19.02469	35,000 ft	66	-
FIX	AWY-HI	55.53347	10,668 m		
TIBAG	UR401F	-18.48472	35,000 ft	32	-
FIX	AWY-HI	55.55500	10,668 m		
KARAT	UR401F	-17.47194	35,000 ft	60	-
FIX	AWY-HI	55.56639	10,668 m		
MODOT	UR401F	-15.00000	35,000 ft	148	-
FIX	AWY-HI	55.59389	10,668 m		
AMBAN	UR401F	-10.00000	35,000 ft	300	-
FIX	AWY-HI	55.64833	10,668 m		
RUBAM	UR401	-7.65500	35,000 ft	140	-
FIX	AWY-HI	55.67333	10,668 m		
PRA	UR401	-4.30737	35,000 ft	201	PRASLIN VOR-DME
VOR	AWY-HI	55.70707	10,668 m		
UDLET	UR401	-0.96500	35,000 ft	201	-
FIX	AWY-HI	55.46333	10,668 m		
UTRON	UR401	2.00000	35,000 ft	178	-
FIX	AWY-HI	55.24833	10,668 m		
IMKOT	UR401	5.39667	35,000 ft	204	-
FIX	AWY-HI	55.00000	10,668 m		
AXINA	UR401	6.83000	35,000 ft	86	-
FIX	AWY-HI	55.00000	10,668 m		
AMPEX	UR401G	8.16667	35,000 ft	80	-
FIX	AWY-HI	55.00000	10,668 m		
SUHIL	UR401G	12.00000	35,000 ft	230	-
FIX	AWY-HI	55.00000	10,668 m		
BOTEM	R401	13.90361	35,000 ft	115	-
FIX	AWY-HI	55.23833	10,668 m		
DAPAB	R401	15.18750	35,000 ft	77	-
FIX	AWY-HI	55.39833	10,668 m		
KIVEL	R401	16.88500	35,000 ft	102	-
FIX	AWY-HI	55.60917	10,668 m		
ERDAX	R401	17.98417	35,000 ft	66	-
FIX	AWY-HI	55.74944	10,668 m		
DEDSO	R401	18.96972	35,000 ft	61	-
FIX	AWY-HI	56.01139	10,668 m		
HAI	R401	19.97031	35,000 ft	61	HAIMA VOR-DME
VOR	AWY-HI	56.28084	10,668 m		
VELIK	R401	20.55611	35,000 ft	35	-
FIX	AWY-HI	56.28222	10,668 m		
ALNUN	R401	21.27361	35,000 ft	43	-
FIX	AWY-HI	56.17806	10,668 m		
DATBU	R401	22.37861	35,000 ft	66	-
FIX	AWY-HI	56.01500	10,668 m		
LABSA	R401	23.03139	29,300 ft	39	-
FIX	AWY-HI	55.91806	8,931 m		
KURTA	R401	23.70139	20,600 ft	40	-
FIX	AWY-HI	55.81667	6,279 m		
OMDB	-	25.25491	0 ft	96	DUBAI INTL
APT	-	55.36426	0 m		

FMEE

Region: COMOROS, MAYOTTE, RÉUNION AND MADAGASCAR Elevation: 66 ft / 20 m
Timezone: INDIAN/REUNION Location: -20.889300 55.517700
Runways: 2 Magnetic Var: 18.760 W

METAR

FMEE 010130Z AUTO 14011KT CAVOK 24/20 Q1014 NOSIG

TAF

TAF FMEE 302300Z 0100/0206 12010KT 9999 SCT040 BKN150

Frequencies

REC - 126.80 MHz - ATIS
TWR - 118.40 MHz -
APP - 127.20 MHz -
GND - 121.90 MHz -
APP - 119.40 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	10,492 ft	102.28	ASPHALT	397 ft	0 ft
	45 m	3,198 m	121.03		121 m	0 m
30	148 ft	10,492 ft	282.26	ASPHALT	0 ft	0 ft
	45 m	3,198 m	301.02		0 m	0 m
14	148 ft	8,768 ft	116.58	ASPHALT	328 ft	0 ft
	45 m	2,672 m	135.34		100 m	0 m
32	148 ft	8,768 ft	296.58	ASPHALT	1,175 ft	0 ft
	45 m	2,672 m	315.34		358 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14	DME	SD	110.30 MHz	18 nm	-	-	46 ft
				33 km	-		46 m
14	LOC-ILS	SD	110.30 MHz	18 nm	116.63	-	66 ft
				33 km	135.39		66 m
14	GS	SD	110.30 MHz	10 nm	117.09	3.00	46 ft
				19 km	135.85		46 m

OMDB

Region: UNITED ARAB EMIRATES
Timezone: ASIA/DUBAI
Runways: 2

Elevation: 62 ft / 19 m
Location: 25.251100 55.371100
Magnetic Var: 2.351 E

METAR

OMDB 010100Z 09006KT 060V140 CAVOK 31/19 Q1006 NOSIG

TAF

TAF OMDB 302300Z 0100/0206 11007KT 8000 NSC BECMG 0103/0105 17010KT PROB30 TEMPO 0104/0108 18017G27KT 4000 BLDU B

Frequencies

REC - 126.27 MHz - ATIS ARRIVAL	REC - 131.70 MHz - ATIS DEPARTURE
TWR - 126.77 MHz - DUBAI TOWER	TWR - 119.55 MHz - DUBAI TOWER
TWR - 118.75 MHz - DUBAI TOWER	TWR - 119.05 MHz - DUBAI TOWER
GND - 118.35 MHz - DUBAI GROUND	GND - 118.85 MHz - DUBAI GROUND
GND - 121.65 MHz - DUBAI GROUND	CLD - 120.35 MHz - CLEARANCE DELIVERY
APP - 122.50 MHz - MINHAD APPROACH	APP - 126.02 MHz - MINHAD APPROACH
APP - 120.25 MHz - DUBAI ARRIVAL	APP - 124.45 MHz - DUBAI ARRIVAL
APP - 124.90 MHz - DUBAI ARRIVAL	DEP - 126.02 MHz - DUBAI DEPARTURE
DEP - 121.02 MHz - DUBAI DEPARTURE	DEP - 126.20 MHz - DUBAI DEPARTURE
DEP - 120.25 MHz - DUBAI DEPARTURE	APP - 120.40 MHz - DUBAI RADAR
APP - 126.02 MHz - DUBAI RADAR	APP - 127.90 MHz - DUBAI DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	200 ft	14,604 ft	121.53	ASPHALT	2,352 ft	771 ft
	61 m	4,452 m	119.18		717 m	235 m
30L	200 ft	14,604 ft	301.54	ASPHALT	436 ft	0 ft
	61 m	4,452 m	299.19		133 m	0 m
12L	200 ft	14,289 ft	121.48	ASPHALT	1,496 ft	381 ft
	61 m	4,355 m	119.13		456 m	116 m
30R	200 ft	14,289 ft	301.50	ASPHALT	991 ft	377 ft
	61 m	4,355 m	299.15		302 m	115 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IDBL	110.10 MHz	18 nm	-	-	62 ft
				33 km	-		62 m
30L	DME	IDBW	111.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
30R	DME	IDBR	110.90 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
12L	LOC-ILS	IDBL	110.10 MHz	18 nm	121.49	-	62 ft
				33 km	119.14		62 m
12R	LOC-ILS	IDBE	109.50 MHz	18 nm	121.54	-	62 ft
				33 km	119.19		62 m
30L	LOC-ILS	IDBW	111.30 MHz	18 nm	301.54	-	62 ft
				33 km	299.19		62 m
30R	LOC-ILS	IDBR	110.90 MHz	18 nm	301.49	-	62 ft
				33 km	299.14		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	GS	IDBL	110.10 MHz	10 nm	121.49	3.00	62 ft
				19 km	119.14		62 m
12R	GS	IDBE	109.50 MHz	10 nm	121.54	3.00	62 ft
				19 km	119.19		62 m
30L	GS	IDBW	111.30 MHz	10 nm	301.54	3.00	62 ft
				19 km	299.19		62 m
30R	GS	IDBR	110.90 MHz	10 nm	301.49	3.00	62 ft
				19 km	299.14		62 m