


2024/05/05 0449Z

ZYTL MUPAM ZYTX

183.67 nm / 340.17 km

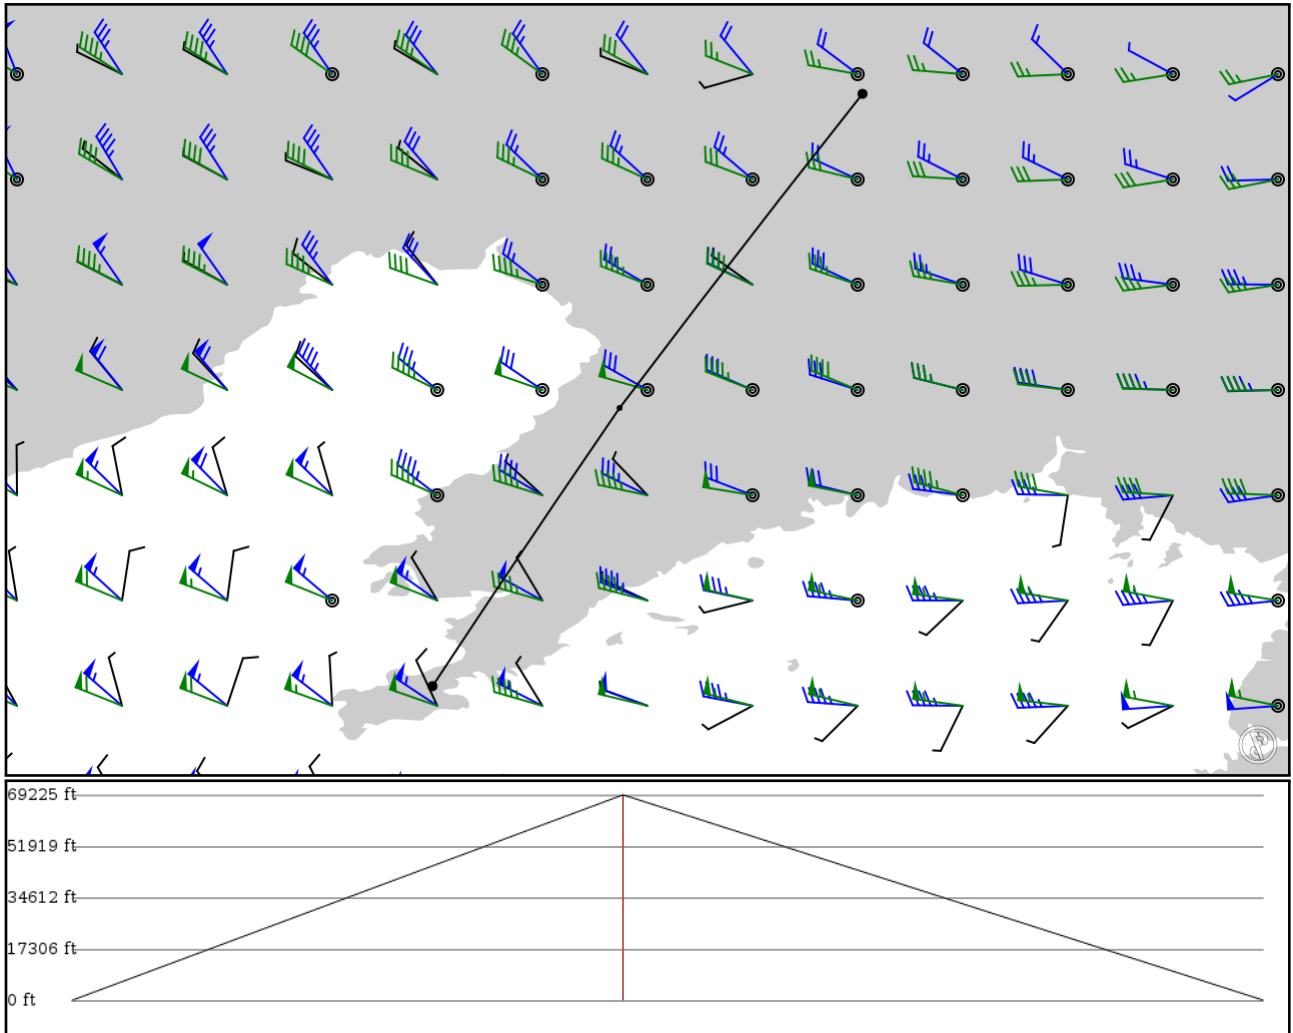

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ZYTL	-	38.96567	0 ft	-	ZHOUSHUIZI
APT	-	121.53860	0 m		
MUPAM	-	40.22167	21,100 ft	84	-
FIX	-	122.38500	6,431 m		
ZYTX	-	41.63984	0 ft	98	TAOXIAN
APT	-	123.48343	0 m		

ZYTL

Region: CHINA
Timezone: ASIA/SHANGHAI
Runways: 1

Elevation: 107 ft / 33 m
Location: 38.965700 121.539000
Magnetic Var: 8.375 W

METAR

ZYTL 050430Z 07004MPS 040V110 8000 -RA BKN008 BKN033 13/12 Q1007 NOSIG

TAF

TAF AMD ZYTL 050309Z 0500/0524 07005MPS 5000 -RA BR BKN008 BKN033 TX18/0506Z TN11/0521Z TEMPO 0500/0506 01004MPS B

Frequencies

REC - 126.65 MHz - ATIS	APP - 123.85 MHz - DALIAN APPROACH
APP - 119.60 MHz - DALIAN APPROACH	APP - 127.95 MHz - DALIAN APPROACH
TWR - 118.25 MHz - DALIAN TOWER	TWR - 118.85 MHz - DALIAN TOWER
GND - 121.65 MHz - DALIAN GROUND	CLD - 121.85 MHz - DALIAN DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	148 ft	10,837 ft	95.67	ASPHALT	650 ft	164 ft
	45 m	3,303 m	104.05		198 m	50 m
28	148 ft	10,837 ft	275.69	ASPHALT	322 ft	164 ft
	45 m	3,303 m	284.07		98 m	50 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	LOC-ILS	IZF	109.10 MHz	18 nm	93.00	-	106 ft
				33 km	101.38		106 m
28	LOC-ILS	IKD	111.10 MHz	18 nm	275.67	-	106 ft
				33 km	284.04		106 m
10	GS	IZF	109.10 MHz	10 nm	96.36	3.00	106 ft
				19 km	104.74		106 m
28	GS	IKD	111.10 MHz	10 nm	276.36	3.00	106 ft
				19 km	284.74		106 m

ZYTX

Region: CHINA
Timezone: ASIA/SHANGHAI
Runways: 1

Elevation: 198 ft / 60 m
Location: 41.640000 123.483000
Magnetic Var: 9.482 W

METAR

ZYTX 050430Z 10003MPS 060V130 CAVOK 17/10 Q1010 NOSIG

TAF

TAF ZYTX 042104Z 0500/0524 03004MPS 6000 BKN040 TX20/0506Z TN13/0521Z

Frequencies

REC - 127.45 MHz - ATIS	TWR - 118.10 MHz - SHENYANG TOWER
TWR - 124.30 MHz - SHENYANG TOWER	GND - 121.90 MHz - TAOXIAN GROUND
APP - 125.55 MHz - SHENYANG APPROACH	APP - 126.55 MHz - SHENYANG APPROACH
APP - 119.82 MHz - SHENYANG APPROACH	GND - 121.95 MHz - TAOXIAN APRON
GND - 121.80 MHz - TAOXIAN APRON	CLD - 121.67 MHz - TAOXIAN DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	10,508 ft	48.46	ASPHALT	0 ft	190 ft
	45 m	3,203 m	57.94		0 m	58 m
24	148 ft	10,508 ft	228.48	ASPHALT	0 ft	187 ft
	45 m	3,203 m	237.96		0 m	57 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IPU	110.50 MHz	18 nm	48.47	-	198 ft
				33 km	57.95		198 m
24	LOC-ILS	IKY	110.30 MHz	18 nm	228.47	-	198 ft
				33 km	237.95		198 m
06	GS	IPU	110.50 MHz	10 nm	48.47	3.00	198 ft
				19 km	57.95		198 m
24	GS	IKY	110.30 MHz	10 nm	228.47	3.00	198 ft
				19 km	237.95		198 m