


PAJN
Juneau Intl

PAFA
Fairbanks Intl

2024/05/13 0645Z

PAJN FAI PAFA

546.98 nm / 1013.00 km

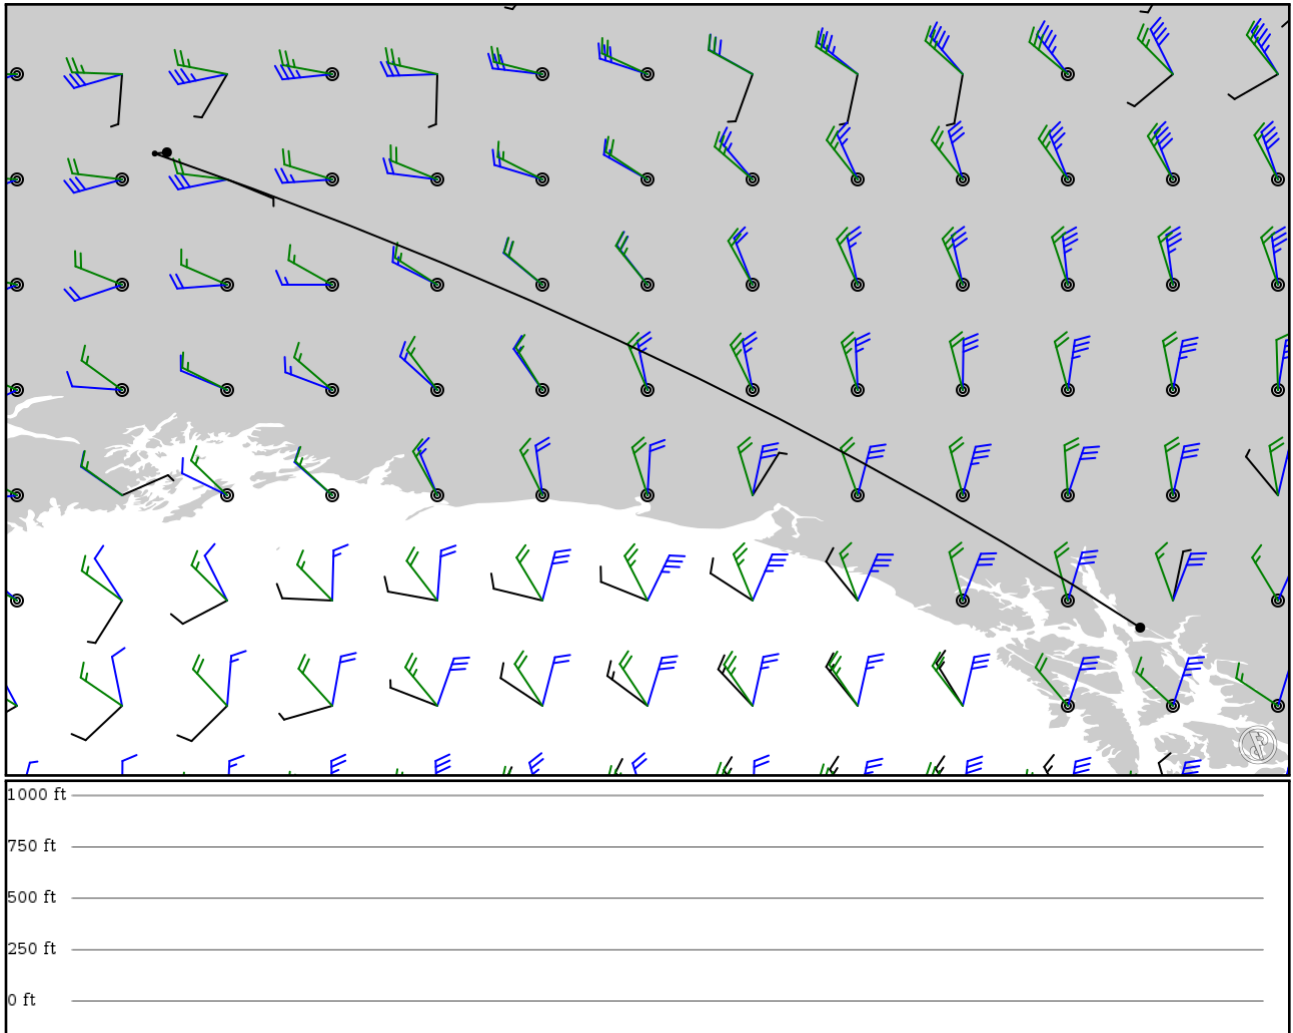

Notes

None

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PAJN	-	58.35793	0 ft	-	-
APT	-	-134.59756	0 m	-	-
FAI	-	64.80008	0 ft	542	FAIRBANKS VORTAC
VOR	-	-148.01197	0 m	-	-
PAFA	-	64.81606	0 ft	4	-
APT	-	-147.84656	0 m	-	-

PAJN

Region: USA (ALASKA)
Timezone: AMERICA/JUNEAU
Runways: 1

Elevation: 20 ft / 6 m
Location: 58.355000 -134.576000
Magnetic Var: 17.276 E

METAR

PAJN 130553Z 00000KT 10SM FEW005 SCT042 BKN050 06/05 A2987

TAF

TAF PAJN 130538Z 1306/1406 VRB04KT P6SM -SHRA FEW007 BKN030 OVC045 FM131200 10012KT P6SM -RA BKN015 FM132100 11012KT

Frequencies

TWR - 118.70 MHz - JUNEAU TOWER
COM - 122.95 MHz - JUNEAU UNICOM

GND - 121.90 MHz - JUNEAU GROUND
REC - 135.20 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	8,867 ft	104.87	ASPHALT	220 ft	0 ft
	46 m	2,703 m	87.59		67 m	0 m
26	151 ft	8,867 ft	284.90	ASPHALT	217 ft	0 ft
	46 m	2,703 m	267.63		66 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IJDL	109.90 MHz	18 nm	-	-	175 ft
				33 km	-		175 m
08	LOC-LOC	IJDL	109.90 MHz	18 nm	84.92	-	21 ft
				33 km	67.65		21 m

PAFA

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 438 ft / 134 m

Location: 64.813900 -147.855000

Magnetic Var: 14.814 E

METAR

PAFA 130553Z 00000KT 10SM BKN055 BKN070 11/00 A2956

TAF

TAF PAFA 130540Z 1306/1412 VRB03KT P6SM VCSH BKN080 FM130800 24005KT P6SM BKN100 FM132100 25005KT P6SM -SHRA VCTS

Frequencies

REC - 124.40 MHz - ATIS

TWR - 118.30 MHz - FAIRBANKS TOWER

APP - 127.10 MHz - FAIRBANKS APPROACH

DEP - 127.10 MHz - FAIRBANKS DEPARTURE

GND - 121.90 MHz - FAIRBANKS GROUND

APP - 125.35 MHz - FAIRBANKS APPROACH

DEP - 125.35 MHz - FAIRBANKS DEPARTURE

CLD - 127.60 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	75 ft	2,903 ft	38.08	GRAVEL	0 ft	0 ft
	23 m	885 m	23.27		0 m	0 m
20	75 ft	2,903 ft	218.09	GRAVEL	0 ft	0 ft
	23 m	885 m	203.28		0 m	0 m
02R	98 ft	6,509 ft	38.04	ASPHALT	0 ft	0 ft
	30 m	1,984 m	23.22		0 m	0 m
20L	98 ft	6,509 ft	218.06	ASPHALT	0 ft	0 ft
	30 m	1,984 m	203.25		0 m	0 m
02L	151 ft	11,812 ft	38.04	ASPHALT	751 ft	377 ft
	46 m	3,600 m	23.23		229 m	115 m
20R	151 ft	11,812 ft	218.08	ASPHALT	751 ft	374 ft
	46 m	3,600 m	203.27		229 m	114 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02L	LOC-ILS	ICNA	109.10 MHz	18 nm	38.07	-	438 ft
				33 km	23.26		438 m
20R	LOC-ILS	IFAI	110.30 MHz	18 nm	218.07	-	438 ft
				33 km	203.26		438 m
02L	GS	ICNA	109.10 MHz	10 nm	38.07	3.00	438 ft
				19 km	23.26		438 m
20R	GS	IFAI	110.30 MHz	10 nm	218.07	3.00	438 ft
				19 km	203.26		438 m