


2024/05/23 2243Z

LIML BIBAN LSGG

140.66 nm / 260.50 km

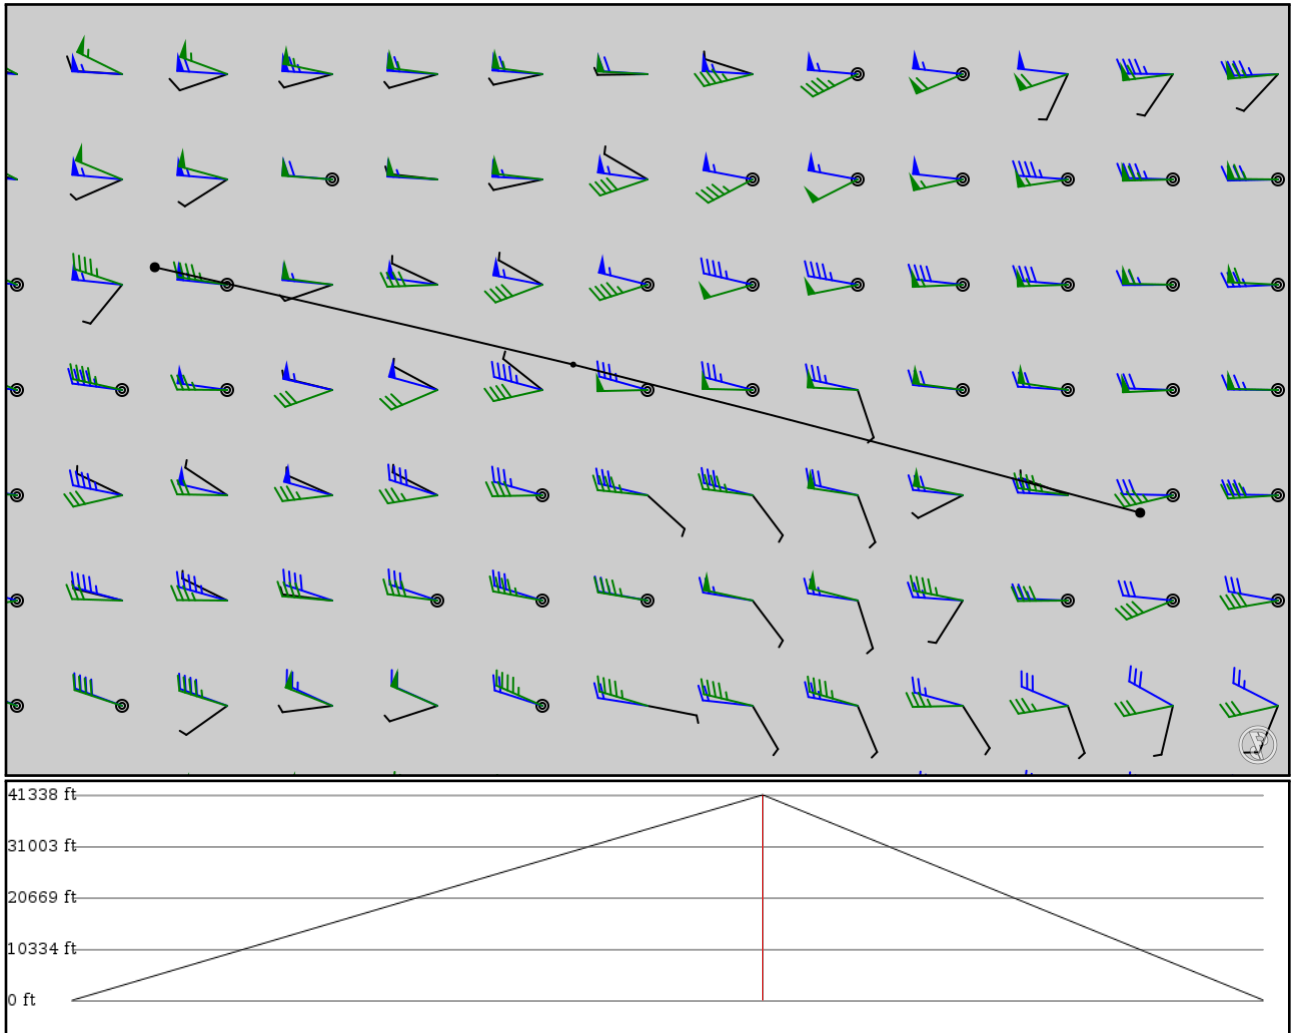

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 20000ft
- Cruise Speed: 320kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIML	-	45.45030	0 ft	-	Milano Linate
APT	-	9.27280	0 m		
BIBAN	-	45.92556	12,600 ft	81	-
FIX	-	7.45083	3,840 m		
LSGG	-	46.23775	0 ft	59	Geneva
APT	-	6.10617	0 m		

## LIML

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 354 ft / 108 m  
Location: 45.450300 9.272810  
Magnetic Var: 3.243 E

## METAR

LIML 232220Z 36001KT 9999 FEW040 14/14 Q1017 NOSIG

## TAF

TAF LIML 231700Z 2318/2418 VRB05KT 9999 SCT020 TEMPO 2318/2321 SHRA TEMPO 2400/2406 3000 BCFG TEMPO 2410/2418 4000

## Frequencies

REC - 136.37 MHz - ATIS	GND - 121.80 MHz - LINATE GROUND
TWR - 118.40 MHz - LINATE TOWER	TWR - 118.10 MHz - LINATE TOWER
APP - 134.17 MHz - MILANO RADAR	APP - 126.75 MHz - MILANO RADAR
APP - 126.30 MHz - MILANO RADAR	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	197 ft	8,019 ft	175.67	ASPHALT	0 ft	200 ft
	60 m	2,444 m	172.43		0 m	61 m
36	197 ft	8,019 ft	355.67	ASPHALT	0 ft	413 ft
	60 m	2,444 m	352.43		0 m	126 m
17	72 ft	1,974 ft	175.66	ASPHALT	0 ft	0 ft
	22 m	602 m	172.42		0 m	0 m
35	72 ft	1,974 ft	355.66	ASPHALT	0 ft	0 ft
	22 m	602 m	352.42		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36	DME	ILNT	109.55 MHz	25 nm	-	-	352 ft
				46 km	-		352 m
36	LOC-ILS	ILNT	109.55 MHz	18 nm	355.69	-	353 ft
				33 km	352.44		353 m
36	GS	ILNT	109.55 MHz	10 nm	355.68	3.00	352 ft
				19 km	352.44		352 m

## LSGG

Region: SWITZERLAND  
Timezone: EUROPE/ZURICH  
Runways: 1

Elevation: 1,411 ft / 430 m  
Location: 46.238100 6.109010  
Magnetic Var: 2.515 E

## METAR

LSGG 232220Z AUTO VRB02KT 9999 NCD 11/09 Q1019 NOSIG

## TAF

TAF LSGG 232025Z 2321/2503 VRB02KT 9999 FEW050 SCT080 TX19/2415Z TN09/2405Z PROB40 TEMPO 2412/2421 SHRA SCT050TCU

## Frequencies

REC - 124.75 MHz - ATIS	REC - 135.57 MHz - ATIS
GND - 121.75 MHz - GENEVA APRON	GND - 121.85 MHz - GENEVA APRON
GND - 121.67 MHz - GENEVA GROUND	GND - 119.70 MHz - GENEVA GROUND
TWR - 118.70 MHz - GENEVA TOWER	TWR - 119.90 MHz - GENEVA TOWER
DEP - 131.32 MHz - GENEVA DEPARTURE	DEP - 119.52 MHz - GENEVA DEPARTURE
APP - 136.45 MHz - GENEVA TRANSIT	APP - 136.25 MHz - GENEVA ARRIVAL
APP - 130.55 MHz - GENEVA APPROACH	APP - 120.30 MHz - GENEVA FINAL

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	164 ft	12,806 ft	45.42	CONCRETE	1,076 ft	0 ft
	50 m	3,903 m	42.91		328 m	0 m
22	164 ft	12,806 ft	225.45	CONCRETE	0 ft	0 ft
	50 m	3,903 m	222.93		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	LOC-ILS	INE	110.90 MHz	18 nm	45.44	-	1,411 ft
				33 km	42.93		1,411 m
22	LOC-ILS	ISW	109.90 MHz	18 nm	225.44	-	1,411 ft
				33 km	222.93		1,411 m
04	GS	INE	110.90 MHz	10 nm	45.44	3.00	1,411 ft
				19 km	42.93		1,411 m
22	GS	ISW	109.90 MHz	10 nm	225.44	3.00	1,411 ft
				19 km	222.93		1,411 m