


2024/06/04 1513Z

EHAM ENITO **UL603** DOLAS **UM16** WAL **L975** MALUD EIDW

405.66 nm / 751.28 km

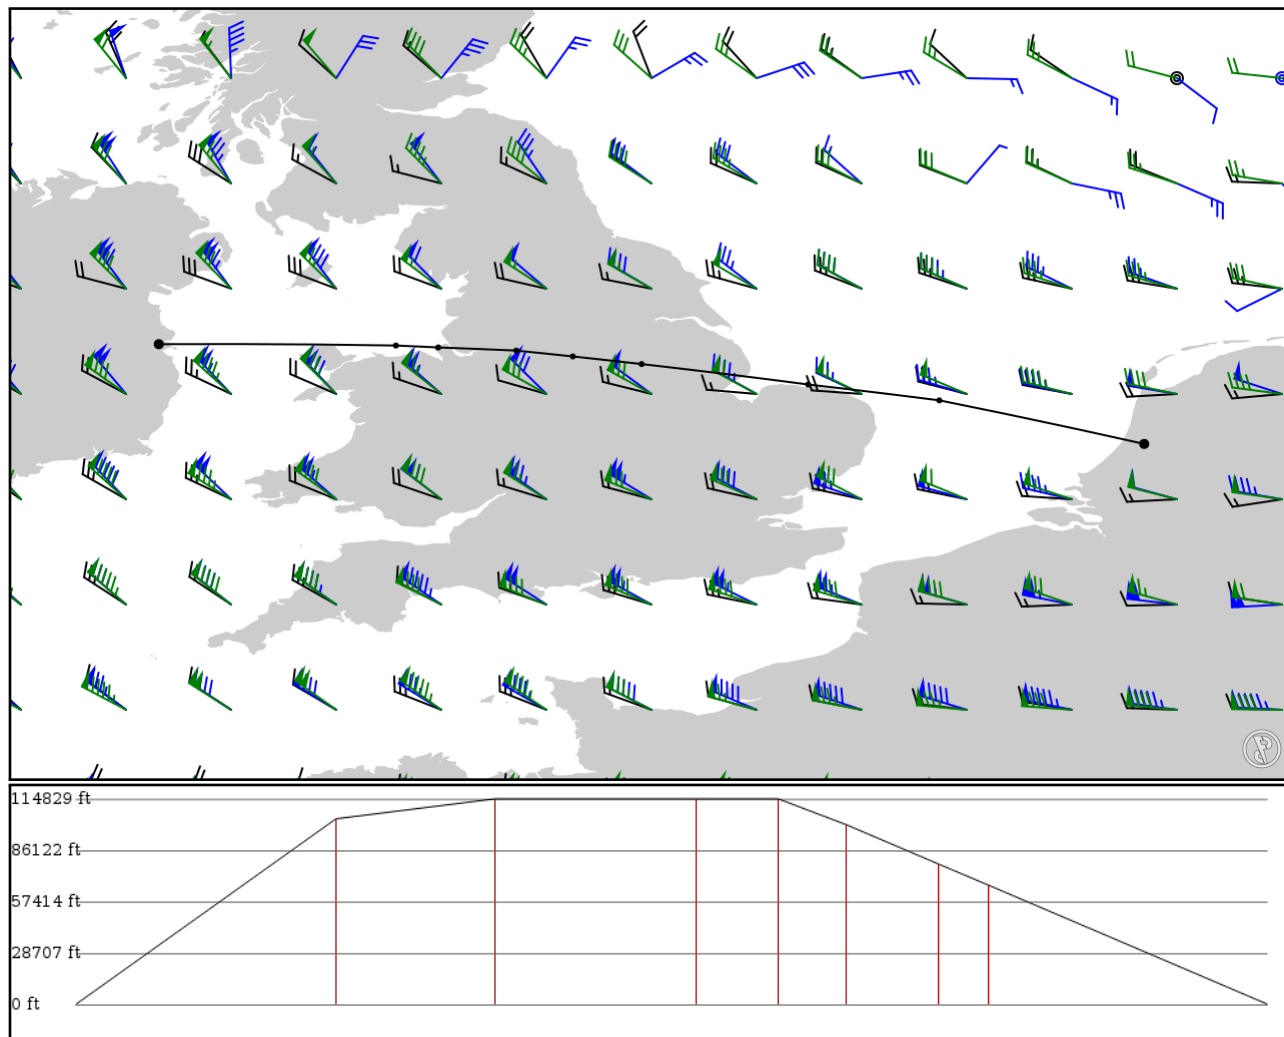

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EHAM APT	-	52.31485 4.75812	0 ft 0 m	-	Schiphol
ENITO FIX	-	52.80139 2.46750	31,600 ft 9,632 m	88	-
DOLAS FIX	UL603 AWY-HI	52.97861 1.00083	35,000 ft 10,668 m	54	-
NAPEX FIX	UM16 AWY-HI	53.20639 -0.86111	35,000 ft 10,668 m	68	-
DISAL FIX	UM16 AWY-HI	53.29139 -1.63083	35,000 ft 10,668 m	28	-
MCT VOR	UM16 AWY-HI	53.35694 -2.26222	30,600 ft 9,327 m	22	MANCHESTER VOR-DME
WAL VOR	UM16 AWY-HI	53.39194 -3.13444	23,900 ft 7,285 m	31	WALLASEY VOR-DME
MALUD FIX	L975 AWY-LO	53.41333 -3.60833	20,300 ft 6,187 m	17	-
EIDW APT	-	53.42826 -6.25955	0 ft 0 m	94	Dublin

EHAM

Region: NETHERLANDS
Timezone: EUROPE/AMSTERDAM
Runways: 6

Elevation: -11 ft / -3 m
Location: 52.308100 4.764170
Magnetic Var: 2.053 E

METAR

EHAM 041455Z 20015KT 170V230 9999 FEW030TCU SCT042 21/13 Q1009 BECMG 24015KT

TAF

TAF TAF EHAM 041103Z 0412/0518 21010KT 9999 BKN040 BECMG 0414/0417 24014KT PROB30 TEMPO 0416/0418 7000 -SHRA FEW030

Frequencies

GND - 121.55 MHz - SCHIPHOL GROUND	GND - 121.70 MHz - SCHIPHOL GROUND
GND - 121.80 MHz - SCHIPHOL GROUND	GND - 121.90 MHz - SCHIPHOL GROUND
GND - 121.60 MHz - SCHIPHOL GROUND	TWR - 119.22 MHz - SCHIPHOL TOWER
TWR - 118.10 MHz - SCHIPHOL TOWER	TWR - 118.27 MHz - SCHIPHOL TOWER
TWR - 119.90 MHz - SCHIPHOL TOWER	APP - 118.80 MHz - AMSTERDAM RADAR
APP - 120.55 MHz - AMSTERDAM RADAR	APP - 127.78 MHz - AMSTERDAM RADAR
APP - 119.05 MHz - SCHIPHOL APPROACH	APP - 118.08 MHz - SCHIPHOL APPROACH
APP - 126.68 MHz - SCHIPHOL APPROACH	APP - 118.40 MHz - SCHIPHOL ARRIVAL
APP - 131.15 MHz - SCHIPHOL ARRIVAL	DEP - 121.20 MHz - SCHIPHOL DEPARTURE
REC - 122.20 MHz - SCHIPHOL ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	145 ft	11,319 ft	86.77	ASPHALT	325 ft	0 ft
	44 m	3,450 m	84.72		99 m	0 m
27	145 ft	11,319 ft	266.81	ASPHALT	0 ft	0 ft
	44 m	3,450 m	264.76		0 m	0 m
18L	150 ft	11,150 ft	183.24	ASPHALT	1,886 ft	0 ft
	46 m	3,399 m	181.19		575 m	0 m
36R	150 ft	11,150 ft	3.24	ASPHALT	0 ft	0 ft
	46 m	3,399 m	1.19		0 m	0 m
18C	145 ft	10,813 ft	183.22	ASPHALT	0 ft	0 ft
	44 m	3,296 m	181.16		0 m	0 m
36C	145 ft	10,813 ft	3.22	ASPHALT	1,473 ft	0 ft
	44 m	3,296 m	1.16		449 m	0 m
18R	190 ft	12,467 ft	183.19	ASPHALT	886 ft	0 ft
	58 m	3,800 m	181.14		270 m	0 m
36L	190 ft	12,467 ft	3.19	ASPHALT	0 ft	0 ft
	58 m	3,800 m	1.14		0 m	0 m
06	150 ft	11,288 ft	57.85	ASPHALT	814 ft	0 ft
	46 m	3,441 m	55.80		248 m	0 m
24	150 ft	11,288 ft	237.89	ASPHALT	0 ft	0 ft
	46 m	3,441 m	235.84		0 m	0 m
04	140 ft	6,624 ft	41.18	ASPHALT	0 ft	0 ft
	43 m	2,019 m	39.13		0 m	0 m
22	140 ft	6,624 ft	221.20	ASPHALT	0 ft	0 ft
	43 m	2,019 m	219.15		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	KAG	110.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
18R	DME	VPB	110.10 MHz	18 nm 33 km	- -	-	-11 ft -11 m
22	DME	SCH	109.15 MHz	18 nm 33 km	- -	-	-11 ft -11 m
27	DME	BVB	111.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36C	DME	MSA	108.75 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36R	DME	ABA	111.95 MHz	18 nm 33 km	- -	-	-11 ft -11 m
06	LOC-ILS	KAG	110.55 MHz	18 nm 33 km	57.88 55.83	-	-11 ft -11 m
18C	LOC-ILS	ZWA	109.50 MHz	18 nm 33 km	183.22 181.17	-	-11 ft -11 m
18R	LOC-ILS	VPB	110.10 MHz	18 nm 33 km	183.19 181.14	-	-11 ft -11 m
22	LOC-ILS	SCH	109.15 MHz	18 nm 33 km	221.20 219.15	-	-11 ft -11 m
27	LOC-ILS	BVB	111.55 MHz	18 nm 33 km	266.79 264.74	-	-11 ft -11 m
36C	LOC-ILS	MSA	108.75 MHz	18 nm 33 km	3.22 1.17	-	-11 ft -11 m
36R	LOC-ILS	ABA	111.95 MHz	18 nm 33 km	3.24 1.19	-	-11 ft -11 m
06	GS	KAG	110.55 MHz	10 nm 19 km	57.88 55.83	3.00	-11 ft -11 m
18C	GS	ZWA	109.50 MHz	10 nm 19 km	183.22 181.17	3.00	-11 ft -11 m
18R	GS	VPB	110.10 MHz	10 nm 19 km	183.19 181.14	3.00	-11 ft -11 m
22	GS	SCH	109.15 MHz	10 nm 19 km	221.20 219.15	3.00	-11 ft -11 m
27	GS	BVB	111.55 MHz	10 nm 19 km	266.79 264.74	3.00	-11 ft -11 m
36C	GS	MSA	108.75 MHz	10 nm 19 km	3.22 1.17	3.00	-11 ft -11 m
36R	GS	ABA	111.95 MHz	10 nm 19 km	3.24 1.19	3.00	-11 ft -11 m

EIDW

Region: IRELAND
Timezone: EUROPE/DUBLIN
Runways: 2

Elevation: 240 ft / 73 m
Location: 53.424900 -6.263080
Magnetic Var: 1.964 W

METAR

EIDW 041500Z 30024KT 270V330 9999 FEW018 SCT050 15/03 Q1008 NOSIG

TAF

TAF AMD EIDW 041249Z 0412/0512 30018KT 9999 FEW015 SCT040 PROB40 TEMPO 0413/0417 31018G28KT BECMG 0417/0419 30010

Frequencies

REC - 124.52 MHz - ATIS	TWR - 118.60 MHz - DUBLIN TOWER
GND - 118.75 MHz - DUBLIN GROUND	GND - 121.80 MHz - DUBLIN GROUND
CLD - 121.87 MHz - CLEARANCE DELIVERY	APP - 133.27 MHz - DUBLIN APPROACH
APP - 121.10 MHz - DUBLIN APPROACH	APP - 119.92 MHz - DUBLIN APPROACH
APP - 119.55 MHz - DUBLIN APPROACH	REC - 118.50 MHz - DUBLIN INFORMATION

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10R	148 ft	8,660 ft	95.26	ASPHALT	0 ft	0 ft
	45 m	2,640 m	97.22		0 m	0 m
28L	148 ft	8,660 ft	275.29	ASPHALT	0 ft	0 ft
	45 m	2,640 m	277.25		0 m	0 m
16	190 ft	6,805 ft	156.64	ASPHALT	0 ft	0 ft
	58 m	2,074 m	158.60		0 m	0 m
34	190 ft	6,805 ft	336.65	ASPHALT	0 ft	0 ft
	58 m	2,074 m	338.61		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16	DME	IAC	111.50 MHz	18 nm	-	-	200 ft
				33 km	-		200 m
10R	LOC-ILS	IDE	108.90 MHz	18 nm	95.26	-	242 ft
				33 km	97.22		242 m
16	LOC-ILS	IAC	111.50 MHz	18 nm	156.64	-	242 ft
				33 km	158.60		242 m
28L	LOC-ILS	IDW	111.35 MHz	18 nm	275.26	-	242 ft
				33 km	277.22		242 m
10R	GS	IDE	108.90 MHz	10 nm	95.26	3.00	242 ft
				19 km	97.22		242 m
16	GS	IAC	111.50 MHz	10 nm	156.64	3.00	242 ft
				19 km	158.60		242 m
28L	GS	IDW	111.35 MHz	10 nm	275.26	3.00	242 ft
				19 km	277.22		242 m