

HKJK

Nairobi Jomo Kanyatta Intl


HAAB

BOLE INTL

2024/06/08 0130Z

HKJK NAK **UG650** RUDOL **G650** SHALA HAAB

656.23 nm / 1215.34 km

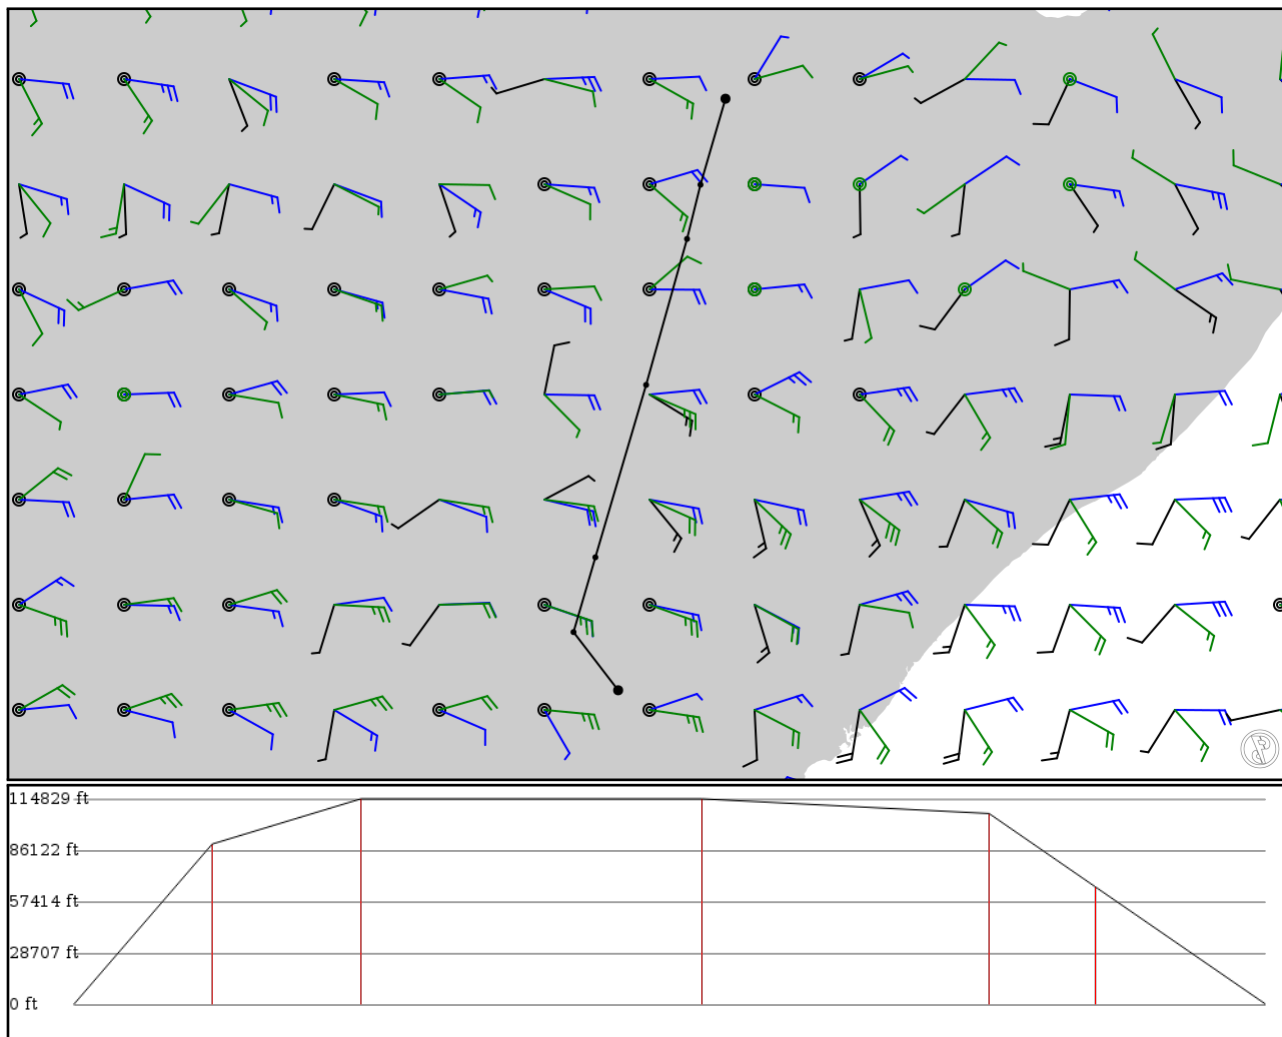

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 33000ft
- Cruise Speed: 420kts
- Descent Rate: 2500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
HKJK APT	-	-1.31707 36.93076	0 ft 0 m	-	Nairobi Jomo Kanyatta Intl
NAK VOR	-	-0.30475 36.15339	27,300 ft 8,321 m	76	NAKURU VOR-DME
LOTAS FIX	UG650 AWY-HI	0.99721 36.53419	35,000 ft 10,668 m	81	-
RUDOL FIX	UG650 AWY-HI	3.99696 37.41755	35,000 ft 10,668 m	187	-
OKNET FIX	G650 AWY-LO	6.53819 38.13008	32,500 ft 9,906 m	158	-
SHALA FIX	G650 AWY-LO	7.48106 38.36406	20,000 ft 6,096 m	58	-
HAAB APT	-	8.97789 38.79932	0 ft 0 m	93	BOLE INTL

HKJK

Region: KENYA

Timezone: AFRICA/NAIROBI

Runways: 1

Elevation: 5,330 ft / 1,625 m

Location: -1.316650 36.931300

Magnetic Var: 0.802 E

METAR

HKJK 080100Z 18004KT 9999 BKN017 16/16 Q1023 NOSIG

TAF

TAF TAF HKJK 072300Z 0800/0906 08005KT 9999 SCT016 BECMG 0809/0812 12010K T BKN025 BECMG 0820/0823 06005KT SCT016

Frequencies

REC - 126.20 MHz - NAIROBI ATIS

TWR - 118.70 MHz - NAIROBI TOWER

DEP - 119.70 MHz - NAIROBI DEPARTURE

GND - 121.60 MHz - NAIROBI GROUND

APP - 119.70 MHz - NAIROBI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	13,528 ft	53.83	ASPHALT	0 ft	194 ft
	45 m	4,123 m	53.03		0 m	59 m
24	148 ft	13,528 ft	233.83	ASPHALT	0 ft	197 ft
	45 m	4,123 m	233.03		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	NL	110.30 MHz	18 nm	53.83	-	5,330 ft
				33 km	53.03		5,330 m
06	GS	NL	110.30 MHz	10 nm	53.83	3.00	5,330 ft
				19 km	53.03		5,330 m

HAAB

Region: ETHIOPIA
Timezone: AFRICA/ADDIS_ABABA
Runways: 2

Elevation: 7,625 ft / 2,324 m
Location: 8.977930 38.799300
Magnetic Var: 2.573 E

METAR

UNKNOWN

TAF

TAF HAAB 071530Z 0718/0824 15007KT 9999 SCT030 SCT080 BECMG 0122/0805 30003KT

Frequencies

REC - 128.50 MHz - BOLE ATIS
TWR - 118.10 MHz - BOLE TOWER

GND - 121.90 MHz - BOLE GROUND
APP - 119.70 MHz - BOLE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	148 ft	12,456 ft	73.56	ASPHALT	1,175 ft	0 ft
	45 m	3,797 m	70.99		358 m	0 m
25L	148 ft	12,456 ft	253.56	ASPHALT	1,175 ft	0 ft
	45 m	3,797 m	250.99		358 m	0 m
07L	148 ft	12,134 ft	73.56	ASPHALT	817 ft	0 ft
	45 m	3,698 m	70.99		249 m	0 m
25R	148 ft	12,134 ft	253.57	ASPHALT	1,243 ft	0 ft
	45 m	3,698 m	251.00		379 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25L	LOC-ILS	ADS	112.90 MHz	18 nm	253.56	-	7,625 ft
				33 km	250.99		7,625 m