

SCEL

Arturo Merino Benitez Intl


SCAT

DESIERTO DE ATACAMA

2024/05/11 0237Z

SCEL TBN **T106** EMBAL **UW204** DAT SCAT

368.24 nm / 681.97 km

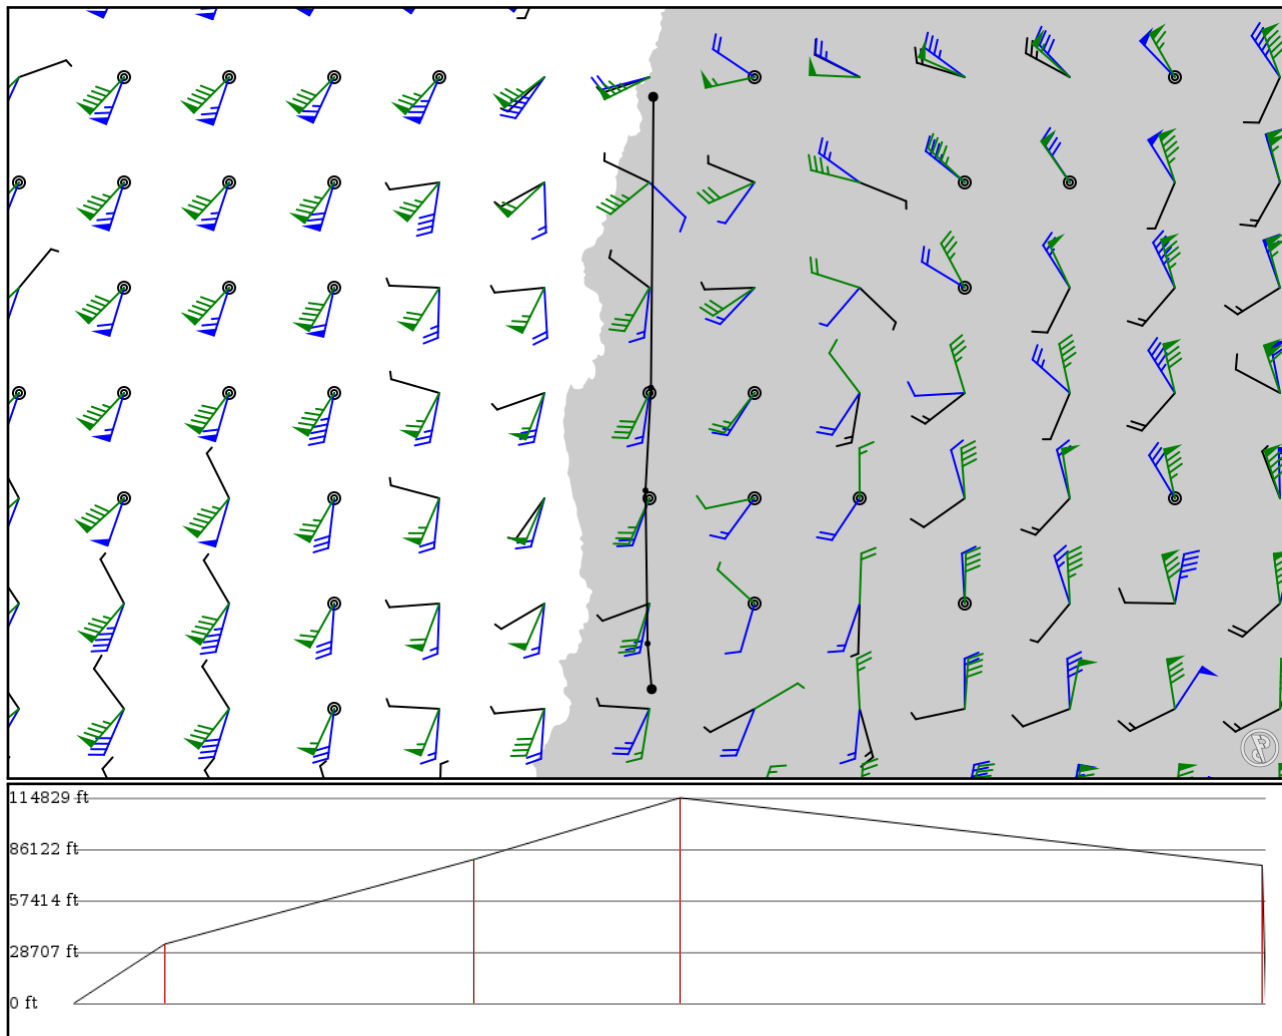

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 360ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SCEL	-	-33.38978	0 ft	-	Arturo Merino Benitez Intl
APT	-	-70.79437	0 m		
TBN	-	-32.91833	10,100 ft	28	TABON VOR-DME
VOR	-	-70.83722	3,078 m		
EMBAL	T106	-31.33374	24,500 ft	95	-
FIX	AWY-LO	-70.85890	7,468 m		
VICNA	UW204	-30.27000	35,000 ft	63	-
FIX	AWY-HI	-70.80222	10,668 m		
DAT	UW204	-27.27944	23,500 ft	179	ATACAMA VOR-DME
VOR	AWY-HI	-70.77611	7,163 m		
SCAT	-	-27.26125	0 ft	1	DESIERTO DE ATACAMA
APT	-	-70.77922	0 m		

SCEL

Region: CHILE
Timezone: AMERICA/SANTIAGO
Runways: 2

Elevation: 1,555 ft / 474 m
Location: -33.391000 -70.794300
Magnetic Var: 0.784 E

METAR

SCEL 110200Z 00000KT CAVOK 08/05 Q1020 NOSIG

TAF

TAF SCEL 102200Z 1100/1124 19010KT 8000 NSC TX15/1119Z TN02/1110Z BECMG 1101/1103 15004KT TEMPO 1106/1112 4000 HZ

Frequencies

REC - 132.70 MHz - ATIS
TWR - 118.35 MHz - SANTIAGO TOWER
CLD - 121.70 MHz - CLEARANCE DELIVERY
APP - 129.70 MHz - SANTIAGO APPROACH
TWR - 118.10 MHz - SANTIAGO TOWER
GND - 122.20 MHz - SANTIAGO GROUND
APP - 119.70 MHz - SANTIAGO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	148 ft	12,479 ft	177.47	ASPHALT	0 ft	0 ft
	45 m	3,804 m	176.69		0 m	0 m
35L	148 ft	12,479 ft	357.47	ASPHALT	0 ft	0 ft
	45 m	3,804 m	356.69		0 m	0 m
17L	180 ft	12,315 ft	177.42	ASPHALT	0 ft	0 ft
	55 m	3,754 m	176.64		0 m	0 m
35R	180 ft	12,315 ft	357.42	ASPHALT	1,785 ft	0 ft
	55 m	3,754 m	356.64		544 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IUEL	110.30 MHz	18 nm	-	-	1,557 ft
				33 km	-		1,557 m
17R	DME	IMER	111.10 MHz	18 nm	-	-	1,555 ft
				33 km	-		1,555 m
17L	LOC-ILS	IUEL	110.30 MHz	18 nm	177.42	-	1,555 ft
				33 km	176.64		1,555 m
17R	LOC-ILS	IMER	111.10 MHz	18 nm	177.47	-	1,555 ft
				33 km	176.69		1,555 m
17L	GS	IUEL	110.30 MHz	10 nm	177.42	3.00	1,555 ft
				19 km	176.64		1,555 m
17R	GS	IMER	111.10 MHz	10 nm	177.47	3.00	1,555 ft
				19 km	176.69		1,555 m

SCAT

Region: CHILE
Timezone: AMERICA/SANTIAGO
Runways: 1

Elevation: 670 ft / 204 m
Location: -27.261400 -70.779200
Magnetic Var: 2.589 W

METAR

SCAT 110200Z AUTO 12006KT 9999 NCD 12/07 Q1017

TAF

TAF SCAT 102239Z 1100/1124 24010KT CAVOK TN14/1110Z TX18/1118Z BECMG 1104/1106 09004KT OVC010 BECMG 1111/1113 OVC010

Frequencies

GND - 121.60 MHz - DESIERTO DE ATACAMA GROUND TWR - 118.30 MHz - DESIERTO DE ATACAMA TOWER
APP - 120.30 MHz - ATACAMA APPROACH APP - 128.30 MHz - ATACAMA APPROACH
COM - 122.80 MHz - DESIERTO DE ATACAMA UNICOM

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17	148 ft	7,242 ft	175.45	ASPHALT	0 ft	194 ft
	45 m	2,207 m	178.04		0 m	59 m
35	148 ft	7,242 ft	355.45	ASPHALT	0 ft	194 ft
	45 m	2,207 m	358.04		0 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17	LOC-ILS	IDAT	110.10 MHz	18 nm	175.50	-	670 ft
				33 km	178.09		670 m
17	GS	IDAT	110.10 MHz	10 nm	175.70	3.00	628 ft
				19 km	178.29		628 m