


2024/05/03 0226Z

ESSA NOSLI ESKN

60.67 nm / 112.36 km

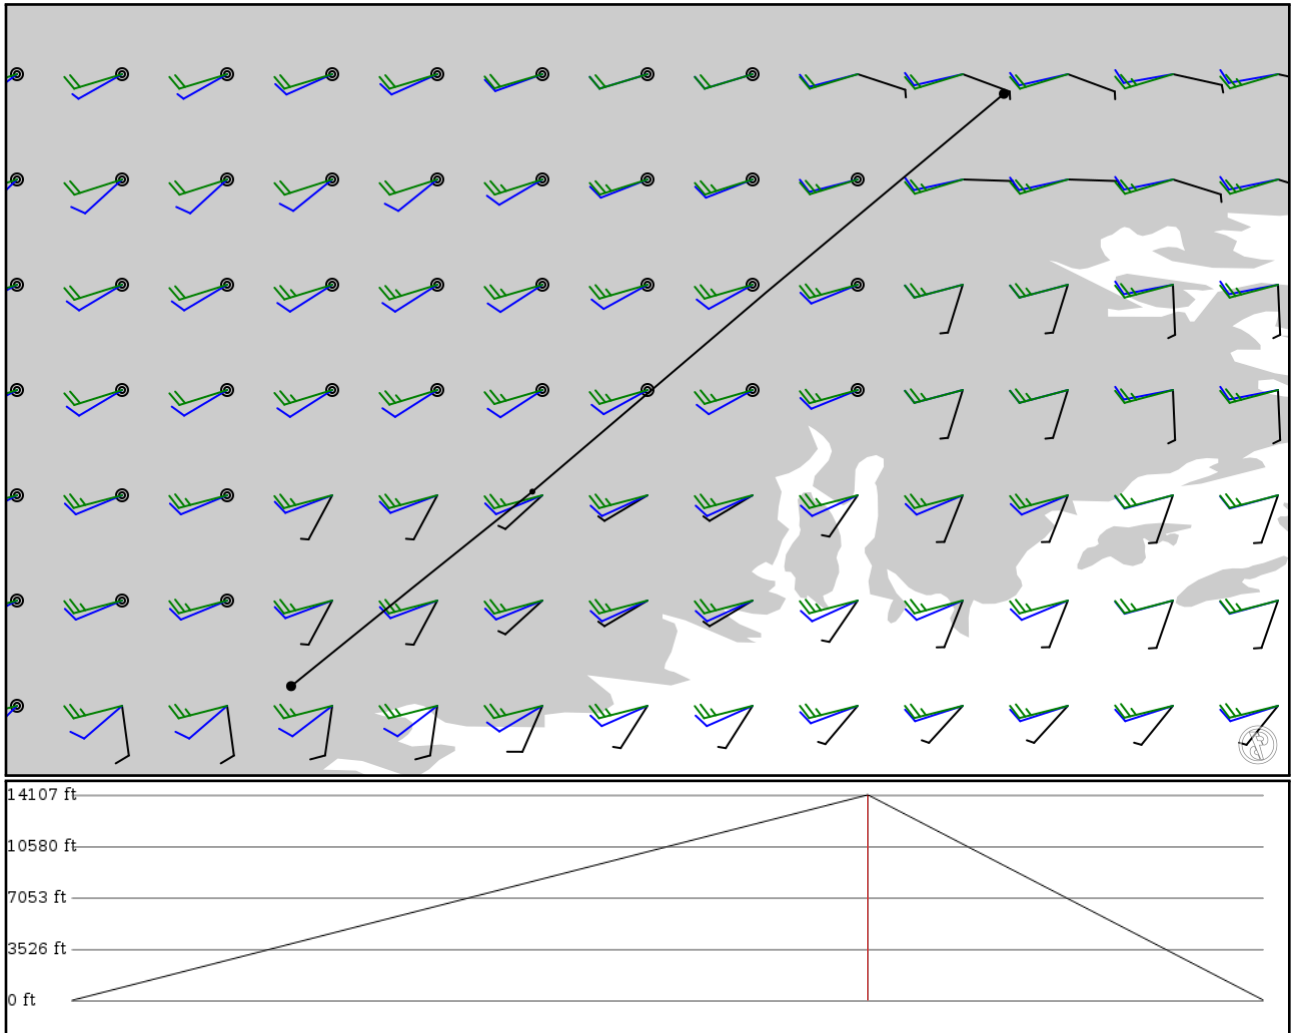

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 1500000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ESSA	-	59.65014	0 ft	-	Stockholm Arlanda
APT	-	17.94363	0 m		
NOSLI	-	59.07278	4,300 ft	40	-
FIX	-	17.25811	1,311 m		
ESKN	-	58.79044	0 ft	20	Stockholm Skavsta
APT	-	16.90733	0 m		

ESSA

Region: SWEDEN
Timezone: EUROPE/STOCKHOLM
Runways: 3

Elevation: 138 ft / 42 m
Location: 59.651900 17.918600
Magnetic Var: 7.118 E

METAR

ESSA 030220Z 06004KT CAVOK 03/00 Q1020 NOSIG

TAF

TAF ESSA 022330Z 0300/0324 05005KT CAVOK

Frequencies

REC - 119.00 MHz - ATIS	REC - 121.62 MHz - ATIS
APP - 123.75 MHz - STOCKHOLM CONTROL APPROACH	APP - 120.15 MHz - STOCKHOLM CONTROL APPROACH
APP - 126.65 MHz - STOCKHOLM CONTROL APPROACH	DEP - 123.75 MHz - STOCKHOLM CONTROL DEPARTURE
DEP - 120.15 MHz - STOCKHOLM CONTROL DEPARTURE	DEP - 126.65 MHz - STOCKHOLM CONTROL DEPARTURE
TWR - 118.50 MHz - ARLANDA TOWER	TWR - 125.12 MHz - ARLANDA TOWER
TWR - 128.72 MHz - ARLANDA TOWER	TWR - 123.10 MHz - ARLANDA TOWER
GND - 121.70 MHz - ARLANDA GROUND	GND - 121.97 MHz - ARLANDA GROUND
GND - 121.92 MHz - ARLANDA GROUND	CLD - 121.82 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	148 ft	10,817 ft	10.38	ASPHALT	0 ft	154 ft
	45 m	3,297 m	3.26		0 m	47 m
19R	148 ft	10,817 ft	190.38	ASPHALT	0 ft	164 ft
	45 m	3,297 m	183.27		0 m	50 m
01R	148 ft	8,151 ft	10.38	ASPHALT	0 ft	223 ft
	45 m	2,484 m	3.26		0 m	68 m
19L	148 ft	8,151 ft	190.38	ASPHALT	0 ft	0 ft
	45 m	2,484 m	183.26		0 m	0 m
08	148 ft	8,180 ft	75.84	ASPHALT	0 ft	161 ft
	45 m	2,493 m	68.72		0 m	49 m
26	148 ft	8,180 ft	255.88	ASPHALT	0 ft	161 ft
	45 m	2,493 m	248.76		0 m	49 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	LOC-ILS	SSA	109.90 MHz	18 nm	10.38	-	138 ft
				33 km	3.26		138 m
01R	LOC-ILS	TSA	109.35 MHz	18 nm	10.38	-	138 ft
				33 km	3.26		138 m
19L	LOC-ILS	USA	111.35 MHz	18 nm	190.38	-	138 ft
				33 km	183.26		138 m
19R	LOC-ILS	NSA	110.70 MHz	18 nm	190.38	-	138 ft
				33 km	183.26		138 m
26	LOC-ILS	ESA	110.10 MHz	18 nm	255.86	-	138 ft
				33 km	248.74		138 m
08	LOC-LOC	WSA	109.55 MHz	18 nm	75.86	-	138 ft
				33 km	68.74		138 m
01L	GS	SSA	109.90 MHz	10 nm	10.38	3.00	138 ft
				19 km	3.26		138 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01R	GS	TSA	109.35 MHz	10 nm	10.38	3.00	138 ft
				19 km	3.26		138 m
19L	GS	USA	111.35 MHz	10 nm	190.38	3.00	138 ft
				19 km	183.26		138 m
19R	GS	NSA	110.70 MHz	10 nm	190.38	3.00	138 ft
				19 km	183.26		138 m
26	GS	ESA	110.10 MHz	10 nm	255.86	3.00	138 ft
				19 km	248.74		138 m

ESKN

Region: SWEDEN
Timezone: EUROPE/STOCKHOLM
Runways: 2

Elevation: 140 ft / 43 m
Location: 58.788600 16.903600
Magnetic Var: 6.570 E

METAR

ESKN 030220Z 05005KT CAVOK 06/01 Q1019

TAF

TAF ESKN 022330Z 0300/0324 04004KT CAVOK BECMG 0309/0311 11010KT

Frequencies

REC - 126.75 MHz - ATIS

TWR - 127.70 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	148 ft	9,411 ft	83.05	ASPHALT	420 ft	0 ft
	45 m	2,869 m	76.48		128 m	0 m
26	148 ft	9,411 ft	263.10	ASPHALT	0 ft	0 ft
	45 m	2,869 m	256.52		0 m	0 m
16	131 ft	6,679 ft	161.82	ASPHALT	0 ft	0 ft
	40 m	2,036 m	155.25		0 m	0 m
34	131 ft	6,679 ft	341.83	ASPHALT	0 ft	0 ft
	40 m	2,036 m	335.26		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26	LOC-ILS	EKN	111.90 MHz	18 nm	263.02	-	140 ft
				33 km	256.45		140 m
08	LOC-LOC	WEK	111.30 MHz	18 nm	83.07	-	140 ft
				33 km	76.50		140 m
26	GS	EKN	111.90 MHz	10 nm	263.15	3.00	140 ft
				19 km	256.58		140 m