

KDCA

Washington National


KCLT

Charlotte Douglas Intl

2024/05/11 0434Z

KDCA GVE **J75** GSO KCLT

288.62 nm / 534.53 km

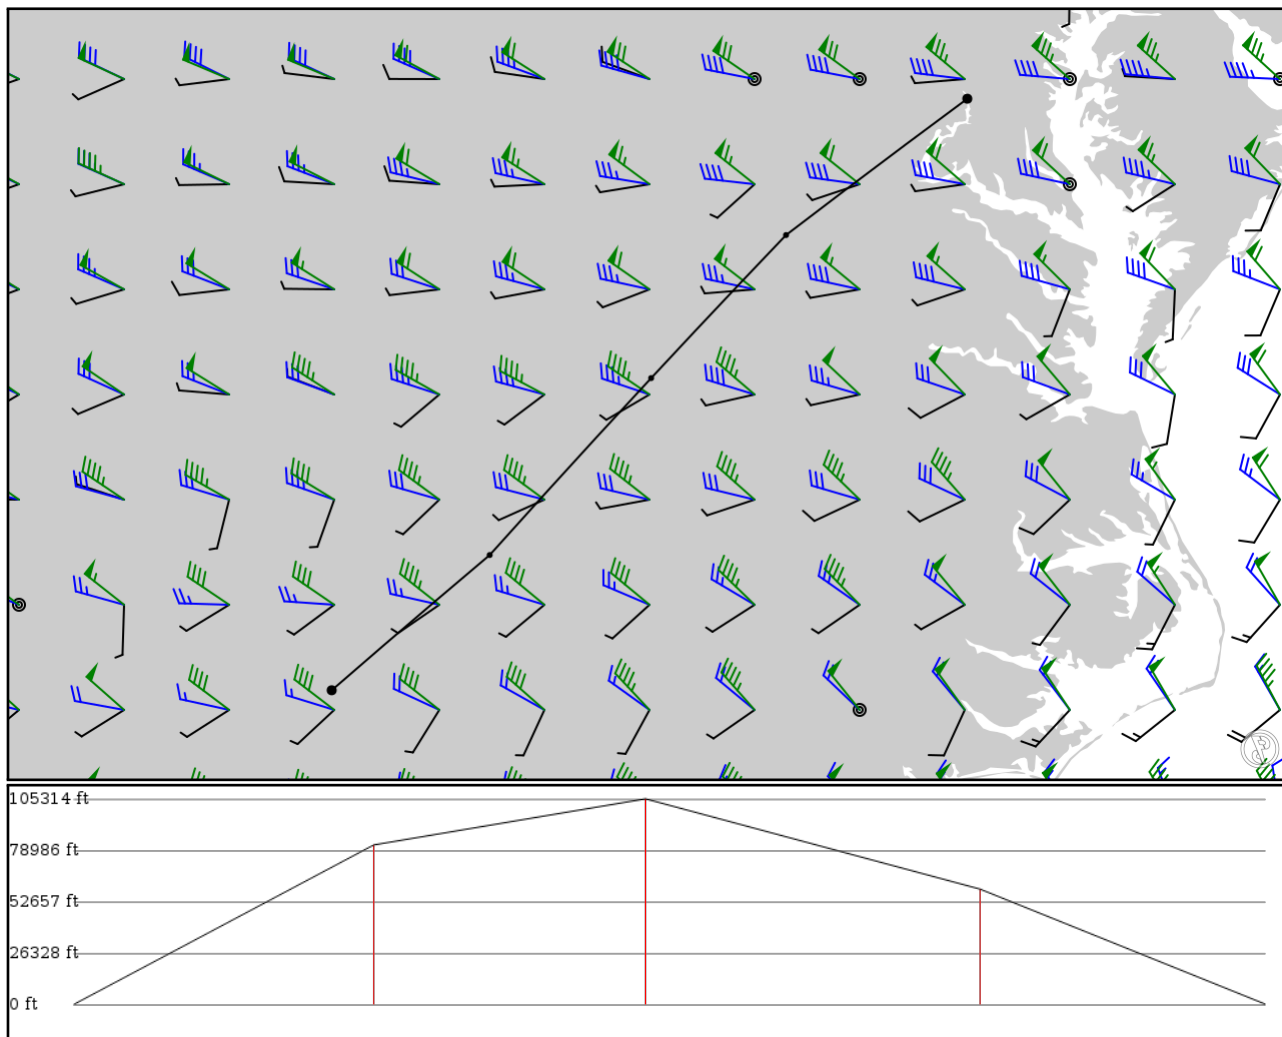

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDCA APT	-	38.85205 -77.03770	0 ft 0 m	-	Washington National
GVE VOR	-	38.01361 -78.15303	24,900 ft 7,590 m	72	GORDONSVILLE VORTAC
DRAIK FIX	J75 AWY-HI	37.13393 -78.98296	32,100 ft 9,784 m	65	-
GSO VOR	J75 AWY-HI	36.04569 -79.97639	18,000 ft 5,486 m	81	GREENSBORO VORTAC
KCLT APT	-	35.21397 -80.94859	0 ft 0 m	68	Charlotte Douglas Intl

KDCA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 15 ft / 5 m
Location: 38.851400 -77.037700
Magnetic Var: 10.879 W

METAR

KDCA 110352Z 06008KT 10SM FEW009 SCT027 OVC037 11/08 A2986 RMK A02 DZE42 SLP111 P0000 T01060083

TAF

KDCA 110257Z 1103/1206 04008KT 5SM -DZ BR BKN015 OVC030 FM110900 01005KT P6SM SCT020 BKN050 FM111500 14004KT P6SM

Frequencies

REC - 132.65 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.25 MHz - CLEARANCE DELIVERY	GND - 121.70 MHz - WASHINGTON GROUND
TWR - 119.10 MHz - WASHINGTON TOWER	TWR - 134.35 MHz - WASHINGTON TOWER
APP - 119.85 MHz - POTOMAC APPROACH	APP - 124.20 MHz - POTOMAC APPROACH
APP - 124.70 MHz - POTOMAC APPROACH	DEP - 118.95 MHz - POTOMAC DEPARTURE
DEP - 125.65 MHz - POTOMAC DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	151 ft	7,183 ft	355.53	ASPHALT	0 ft	200 ft
	46 m	2,190 m	6.41		0 m	61 m
19	151 ft	7,183 ft	175.53	ASPHALT	0 ft	197 ft
	46 m	2,190 m	186.41		0 m	60 m
15	151 ft	5,205 ft	142.76	ASPHALT	0 ft	413 ft
	46 m	1,587 m	153.64		0 m	126 m
33	151 ft	5,205 ft	322.77	ASPHALT	0 ft	180 ft
	46 m	1,587 m	333.65		0 m	55 m
04	151 ft	5,009 ft	25.45	ASPHALT	203 ft	0 ft
	46 m	1,527 m	36.33		62 m	0 m
22	151 ft	5,009 ft	205.46	ASPHALT	0 ft	381 ft
	46 m	1,527 m	216.34		0 m	116 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	DME	IDCA	109.90 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
19	DME	IVWH	108.50 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
01	LOC-ILS	IDCA	109.90 MHz	18 nm	355.51	-	15 ft
				33 km	6.39		15 m
01	GS	IDCA	109.90 MHz	10 nm	355.51	3.00	15 ft
				19 km	6.39		15 m

KCLT

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 748 ft / 228 m
Location: 35.213800 -80.948500
Magnetic Var: 8.054 W

METAR

KCLT 110352Z 33009KT 10SM CLR 16/07 A2984 RMK A02 SLP113 T01560067

TAF

KCLT 110259Z 1103/1206 36010KT P6SM FEW070 FM110500 34005KT P6SM SKC FM111800 26006KT P6SM FEW060 FM120300 31005KT

Frequencies

REC - 121.15 MHz - ATIS (ARRIVAL)	REC - 132.10 MHz - ATIS (DEPARTURE)
COM - 122.95 MHz - UNICOM	CLD - 127.15 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - CHARLOTTE GROUND	GND - 121.90 MHz - CHARLOTTE GROUND
TWR - 133.35 MHz - CHARLOTTE TOWER	TWR - 126.40 MHz - CHARLOTTE TOWER
TWR - 118.10 MHz - CHARLOTTE TOWER	DEP - 134.75 MHz - CHARLOTTE DEPARTURE
DEP - 128.32 MHz - CHARLOTTE DEPARTURE	DEP - 124.00 MHz - CHARLOTTE DEPARTURE
DEP - 120.50 MHz - CHARLOTTE DEPARTURE	DEP - 120.05 MHz - CHARLOTTE DEPARTURE
APP - 134.75 MHz - CHARLOTTE APPROACH	APP - 128.32 MHz - CHARLOTTE APPROACH
APP - 126.15 MHz - CHARLOTTE APPROACH	APP - 124.00 MHz - CHARLOTTE APPROACH
APP - 120.50 MHz - CHARLOTTE APPROACH	APP - 120.05 MHz - CHARLOTTE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	151 ft	9,008 ft	175.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	184.04		0 m	0 m
36L	151 ft	9,008 ft	355.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	4.04		0 m	0 m
18C	151 ft	10,009 ft	175.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	184.03		0 m	0 m
36C	151 ft	10,009 ft	355.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	4.04		0 m	0 m
18L	151 ft	8,686 ft	176.00	ASPHALT	0 ft	0 ft
	46 m	2,648 m	184.05		0 m	0 m
36R	151 ft	8,686 ft	356.00	ASPHALT	0 ft	0 ft
	46 m	2,648 m	4.05		0 m	0 m
05	151 ft	7,510 ft	48.35	ASPHALT	0 ft	148 ft
	46 m	2,289 m	56.40		0 m	45 m
23	151 ft	7,510 ft	228.36	ASPHALT	0 ft	148 ft
	46 m	2,289 m	236.41		0 m	45 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	DME	IRGS	110.15 MHz	18 nm	-	-	749 ft
				33 km	-		749 m
23	DME	IAPU	109.50 MHz	18 nm	-	-	749 ft
				33 km	-		749 m
36L	DME	IXUU	110.15 MHz	18 nm	-	-	749 ft
				33 km	-		749 m
36R	DME	IBQC	108.90 MHz	18 nm	-	-	749 ft
				33 km	-		749 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	ICLT	110.95 MHz	18 nm	48.37	-	749 ft
				33 km	56.42		749 m
18C	LOC-ILS	IPEP	111.30 MHz	18 nm	175.98	-	748 ft
				33 km	184.03		748 m
18L	LOC-ILS	IVKQ	110.35 MHz	18 nm	176.00	-	748 ft
				33 km	184.05		748 m
18R	LOC-ILS	IRGS	110.15 MHz	18 nm	175.98	-	748 ft
				33 km	184.03		748 m
23	LOC-ILS	IAPU	109.50 MHz	18 nm	228.35	-	748 ft
				33 km	236.40		748 m
36C	LOC-ILS	IDQG	111.70 MHz	18 nm	355.98	-	748 ft
				33 km	4.03		748 m
36L	LOC-ILS	IXUU	110.15 MHz	18 nm	355.98	-	748 ft
				33 km	4.03		748 m
36R	LOC-ILS	IBQC	108.90 MHz	18 nm	356.00	-	748 ft
				33 km	4.05		748 m
05	GS	ICLT	110.95 MHz	10 nm	48.35	3.00	748 ft
				19 km	56.40		748 m
18C	GS	IPEP	111.30 MHz	10 nm	175.98	3.00	748 ft
				19 km	184.03		748 m
18L	GS	IVKQ	110.35 MHz	10 nm	176.00	3.00	748 ft
				19 km	184.05		748 m
18R	GS	IRGS	110.15 MHz	10 nm	175.98	3.00	748 ft
				19 km	184.03		748 m
23	GS	IAPU	109.50 MHz	10 nm	228.35	3.00	748 ft
				19 km	236.40		748 m
36C	GS	IDQG	111.70 MHz	10 nm	355.98	3.00	748 ft
				19 km	4.03		748 m
36L	GS	IXUU	110.15 MHz	10 nm	355.98	3.00	748 ft
				19 km	4.03		748 m
36R	GS	IBQC	108.90 MHz	10 nm	356.00	3.00	748 ft
				19 km	4.05		748 m