

# LIRN

Naples Capodichino


# LICJ

PALERMO

2024/05/15 0243Z

LIRN AMANO LICJ

172.41 nm / 319.31 km

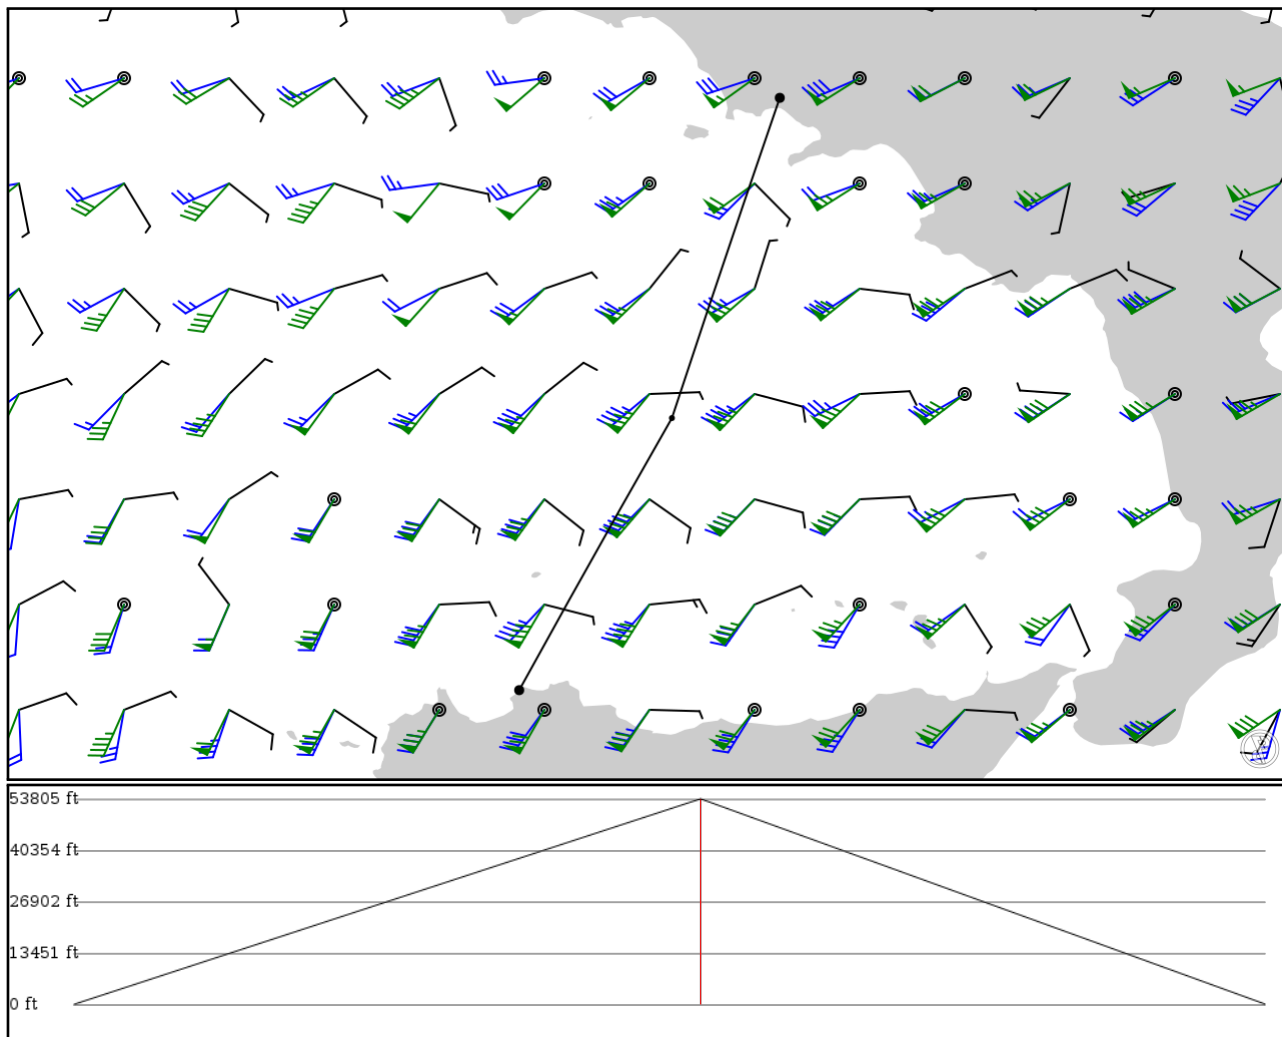

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIRN	-	40.88603	0 ft	-	Naples Capodichino
APT	-	14.29078	0 m		
AMANO	-	39.42167	16,400 ft	90	-
FIX	-	13.79667	4,999 m		
LICJ	-	38.17738	0 ft	81	PALERMO
APT	-	13.09704	0 m		

## LIRN

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 1

Elevation: 292 ft / 89 m  
Location: 40.886000 14.290800  
Magnetic Var: 3.963 E

## METAR

LIRN 150220Z 33002KT CAVOK 16/11 Q1008 NOSIG

## TAF

TAF LIRN 150117Z 1500/1524 VRB05KT 9999 FEW040 BECMG 1510/1512 19010KT BECMG 1516/1518 VRB04KT

## Frequencies

APP - 124.35 MHz - NAPOLI APPROACH  
TWR - 118.50 MHz - NAPOLI TOWER  
REC - 135.97 MHz - ATIS

APP - 120.95 MHz - NAPOLI APPROACH  
GND - 121.90 MHz - NAPOLI GROUND

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	8,630 ft	58.04	ASPHALT	1,312 ft	217 ft
	45 m	2,630 m	54.07		400 m	66 m
24	148 ft	8,630 ft	238.05	ASPHALT	607 ft	230 ft
	45 m	2,630 m	234.09		185 m	70 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	NPC	110.15 MHz	25 nm	-	-	294 ft
				46 km	-		294 m
24	DME	INPL	109.50 MHz	25 nm	-	-	250 ft
				46 km	-		250 m
06	LOC-ILS	NPC	110.15 MHz	18 nm	58.08	-	292 ft
				33 km	54.12		292 m
24	LOC-ILS	INPL	109.50 MHz	18 nm	238.03	-	288 ft
				33 km	234.06		288 m
24	LOC-ILS	INP	109.50 MHz	18 nm	238.08	-	292 ft
				33 km	234.12		292 m
24	GS	INPL	109.50 MHz	10 nm	238.06	3.33	250 ft
				19 km	234.10		250 m
24	GS	INP	109.50 MHz	10 nm	238.08	3.33	292 ft
				19 km	234.12		292 m

## LICJ

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 63 ft / 19 m  
Location: 38.177500 13.097200  
Magnetic Var: 3.575 E

## METAR

LICJ 150220Z 20002KT CAVOK 18/17 Q1006

## TAF

TAF LICJ 150121Z 1500/1524 VRB05KT CAVOK BECMG 1508/1510 03012KT BECMG 1516/1518 VRB05KT

## Frequencies

GND - 121.62 MHz - RAISI GROUND  
APP - 120.20 MHz - PALERMO APPROACH  
REC - 123.87 MHz - ATIS

TWR - 119.05 MHz - RAISI TOWER  
APP - 118.65 MHz - PALERMO APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	6,791 ft	23.79	ASPHALT	0 ft	0 ft
	45 m	2,070 m	20.22		0 m	0 m
20	148 ft	6,791 ft	203.80	ASPHALT	0 ft	0 ft
	45 m	2,070 m	200.22		0 m	0 m
07	197 ft	10,922 ft	66.82	ASPHALT	404 ft	577 ft
	60 m	3,329 m	63.25		123 m	176 m
25	197 ft	10,922 ft	246.84	ASPHALT	669 ft	302 ft
	60 m	3,329 m	243.27		204 m	92 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20	DME	ITO	110.55 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
25	DME	RAI	109.50 MHz	18 nm	-	-	65 ft
				33 km	-		65 m
20	LOC-ILS	ITO	110.55 MHz	18 nm	203.92	-	64 ft
				33 km	200.34		64 m
25	LOC-ILS	RAI	109.50 MHz	18 nm	246.80	-	64 ft
				33 km	243.22		64 m
20	GS	ITO	110.55 MHz	10 nm	203.92	3.00	64 ft
				19 km	200.34		64 m
25	GS	RAI	109.50 MHz	10 nm	246.80	3.00	64 ft
				19 km	243.22		64 m