

KJFK

John F Kennedy Intl


EGLL

London Heathrow

2024/05/12 0343Z

KJFK HFD **J42** BOS **J575** TUSKY **N124B** YQX **5E53** 5150N +51.000_--50.000 **V** DOGAL **UM140** BURAK **UL9** SLANY
UN24 PEMOB **UN14** TOPRO EGLL

3014.21 nm / 5582.32 km

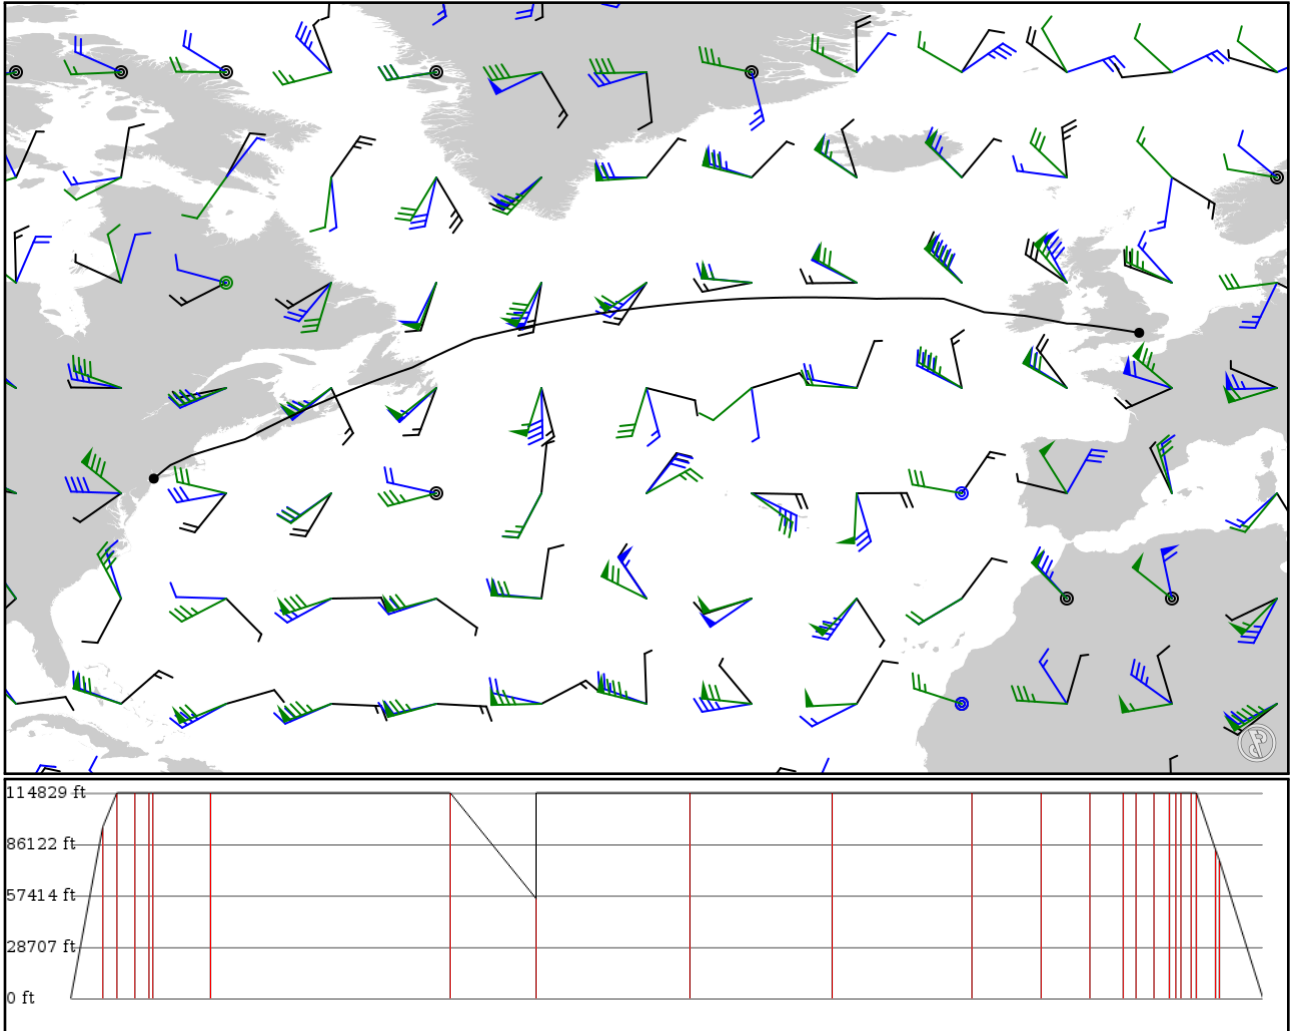

Notes

Using NAT tracks from 26/6/2016

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes

- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJFK APT	-	40.63990 -73.77666	0 ft 0 m	-	John F Kennedy Intl
HFD VOR	-	41.64111 -72.54742	29,200 ft 8,900 m	81	HARTFORD VOR-DME
PUT VOR	J42 AWY-HI	41.95547 -71.84408	35,000 ft 10,668 m	36	PUTNAM VOR-DME
BOS VOR	J42 AWY-HI	42.35744 -70.98956	35,000 ft 10,668 m	45	BOSTON VOR-DME
SCUPP FIX	J575 AWY-HI	42.60306 -70.23037	35,000 ft 10,668 m	36	-
CANAL FIX	J575 AWY-HI	42.66903 -70.02271	35,000 ft 10,668 m	9	-
TUSKY FIX	J575 AWY-HI	43.56500 -67.00000	35,000 ft 10,668 m	143	-
YQX VOR	N124B AWY-HI	48.89958 -54.53500	35,000 ft 10,668 m	607	GANDER VOR-DME
5150N FIX	5E53 AWY-LO	51.00000 -50.00000	17,000 ft 5,182 m	215	-
+51.000_--50.000 LATLON	-	51.00000 -50.00000	35,000 ft 10,668 m	0	-
+53.000_--40.000 LATLON	V NAT	53.00000 -40.00000	35,000 ft 10,668 m	388	-
+54.000_--30.000 LATLON	V NAT	54.00000 -30.00000	35,000 ft 10,668 m	361	-
+54.000_--20.000 LATLON	V NAT	54.00000 -20.00000	35,000 ft 10,668 m	352	-
DOGAL FIX	V NAT	54.00000 -15.00000	35,000 ft 10,668 m	176	-
BURAK FIX	UM140 AWY-HI	53.00000 -12.00000	35,000 ft 10,668 m	122	-
UNBEG FIX	UL9 AWY-HI	52.80500 -9.73000	35,000 ft 10,668 m	83	-
SHA VOR	UL9 AWY-HI	52.72101 -8.88521	35,000 ft 10,668 m	31	SHANNON VOR-DME
ABAGU FIX	UL9 AWY-HI	52.50333 -7.64667	35,000 ft 10,668 m	47	-
ROPED FIX	UL9 AWY-HI	52.30833 -6.60472	35,000 ft 10,668 m	39	-
DIMUS FIX	UL9 AWY-HI	52.23972 -6.25139	35,000 ft 10,668 m	13	-
SLANY FIX	UL9 AWY-HI	52.15861 -5.84222	35,000 ft 10,668 m	15	-
PEMOB FIX	UN24 AWY-HI	52.14389 -5.16139	35,000 ft 10,668 m	25	-
ABAPO FIX	UN14 AWY-HI	52.10278 -4.80333	35,000 ft 10,668 m	13	-
MEDOG FIX	UN14 AWY-HI	51.95028 -3.54944	25,300 ft 7,711 m	47	-
TOPRO FIX	UN14 AWY-HI	51.91167 -3.24917	23,500 ft 7,163 m	11	-
EGLL APT	-	51.47122 -0.46098	0 ft 0 m	107	London Heathrow

KJFK

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 12 ft / 4 m
Location: 40.640100 -73.776500
Magnetic Var: 12.819 W

METAR

KJFK 120251Z 18009KT 10SM BKN110 BKN250 11/06 A2989 RMK A02 SLP122 T01060056 51010

TAF

TAF AMD KJFK 120237Z 1203/1306 16009KT P6SM SCT060 BKN120 FM120700 17007KT P6SM SCT040 BKN060 PROB30 1207/1211 -SH

Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.49		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.50		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm 33 km	- -	-	13 ft 13 m
31R	DME	IRTH	111.50 MHz	18 nm 33 km	- -	-	13 ft 13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm 33 km	30.68 43.50	-	12 ft 12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm 33 km	30.67 43.49	-	12 ft 12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm 33 km	120.87 133.69	-	12 ft 12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm 33 km	210.67 223.49	-	12 ft 12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm 33 km	210.68 223.50	-	12 ft 12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm 33 km	300.84 313.66	-	12 ft 12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm 33 km	300.87 313.69	-	12 ft 12 m
04L	GS	IHIQ	110.90 MHz	10 nm 19 km	30.68 43.50	3.00	12 ft 12 m
04R	GS	IJFK	109.50 MHz	10 nm 19 km	30.67 43.49	3.00	12 ft 12 m
13L	GS	ITLK	111.50 MHz	10 nm 19 km	120.87 133.69	3.00	12 ft 12 m
22L	GS	IIWY	110.90 MHz	10 nm 19 km	210.67 223.49	3.00	12 ft 12 m
22R	GS	IJOC	109.50 MHz	10 nm 19 km	210.68 223.50	3.00	12 ft 12 m
31L	GS	IMOH	111.35 MHz	10 nm 19 km	300.84 313.66	3.00	12 ft 12 m
31R	GS	IRTH	111.50 MHz	10 nm 19 km	300.87 313.69	3.00	12 ft 12 m

EGLL

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 2

Elevation: 83 ft / 25 m
Location: 51.471200 -0.460881
Magnetic Var: 0.378 E

METAR

EGLL 120320Z AUTO 04003KT 9999 NCD 12/10 Q1015 NOSIG

TAF

TAF EGLL 112253Z 1200/1306 08007KT 9999 FEW045 PROB30 1203/1207 8000 PROB30 TEMPO 1213/1218 3000 +SHRA BECMG 1215

Frequencies

REC - 128.07 MHz - HEATHROW INFORMATION	REC - 121.92 MHz - HEATHROW INFORMATION
CLD - 121.97 MHz - HEATHROW DELIVERY	GND - 121.70 MHz - HEATHROW GROUND
GND - 121.85 MHz - HEATHROW GROUND	GND - 121.90 MHz - HEATHROW GROUND
TWR - 118.50 MHz - HEATHROW TOWER	TWR - 118.70 MHz - HEATHROW TOWER
TWR - 124.47 MHz - HEATHROW TOWER	APP - 119.72 MHz - HEATHROW DIRECTOR
APP - 120.40 MHz - HEATHROW DIRECTOR	APP - 134.97 MHz - HEATHROW DIRECTOR
APP - 125.62 MHz - HEATHROW RADAR	APP - 127.52 MHz - HEATHROW RADAR
DEP - 120.52 MHz - HEATHROW DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	164 ft	12,770 ft	89.66	ASPHALT	1,007 ft	0 ft
	50 m	3,892 m	89.28		307 m	0 m
27R	164 ft	12,770 ft	269.70	ASPHALT	0 ft	177 ft
	50 m	3,892 m	269.33		0 m	54 m
09R	164 ft	11,975 ft	89.68	ASPHALT	1,004 ft	0 ft
	50 m	3,650 m	89.30		306 m	0 m
27L	164 ft	11,975 ft	269.72	ASPHALT	0 ft	95 ft
	50 m	3,650 m	269.34		0 m	29 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IAA	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09R	DME	IBB	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27L	DME	ILL	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27R	DME	IRR	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09L	LOC-ILS	IAA	110.30 MHz	18 nm	89.68	-	83 ft
				33 km	89.30		83 m
09R	LOC-ILS	IBB	109.50 MHz	18 nm	89.70	-	83 ft
				33 km	89.32		83 m
27L	LOC-ILS	ILL	109.50 MHz	18 nm	269.70	-	83 ft
				33 km	269.32		83 m
27R	LOC-ILS	IRR	110.30 MHz	18 nm	269.68	-	83 ft
				33 km	269.30		83 m
09L	GS	IAA	110.30 MHz	10 nm	89.68	3.00	83 ft
				19 km	89.30		83 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	GS	IBB	109.50 MHz	10 nm	89.70	3.00	83 ft
				19 km	89.32		83 m
27L	GS	ILL	109.50 MHz	10 nm	269.70	3.00	83 ft
				19 km	269.32		83 m
27R	GS	IRR	110.30 MHz	10 nm	269.68	3.00	83 ft
				19 km	269.30		83 m