

KSFO

San Francisco Intl


KLAX

Los Angeles Intl

2024/05/13 0016Z

KSFO RANCK **V485** ROM **V137** AVE **J1** DERBB KLAX

294.07 nm / 544.61 km

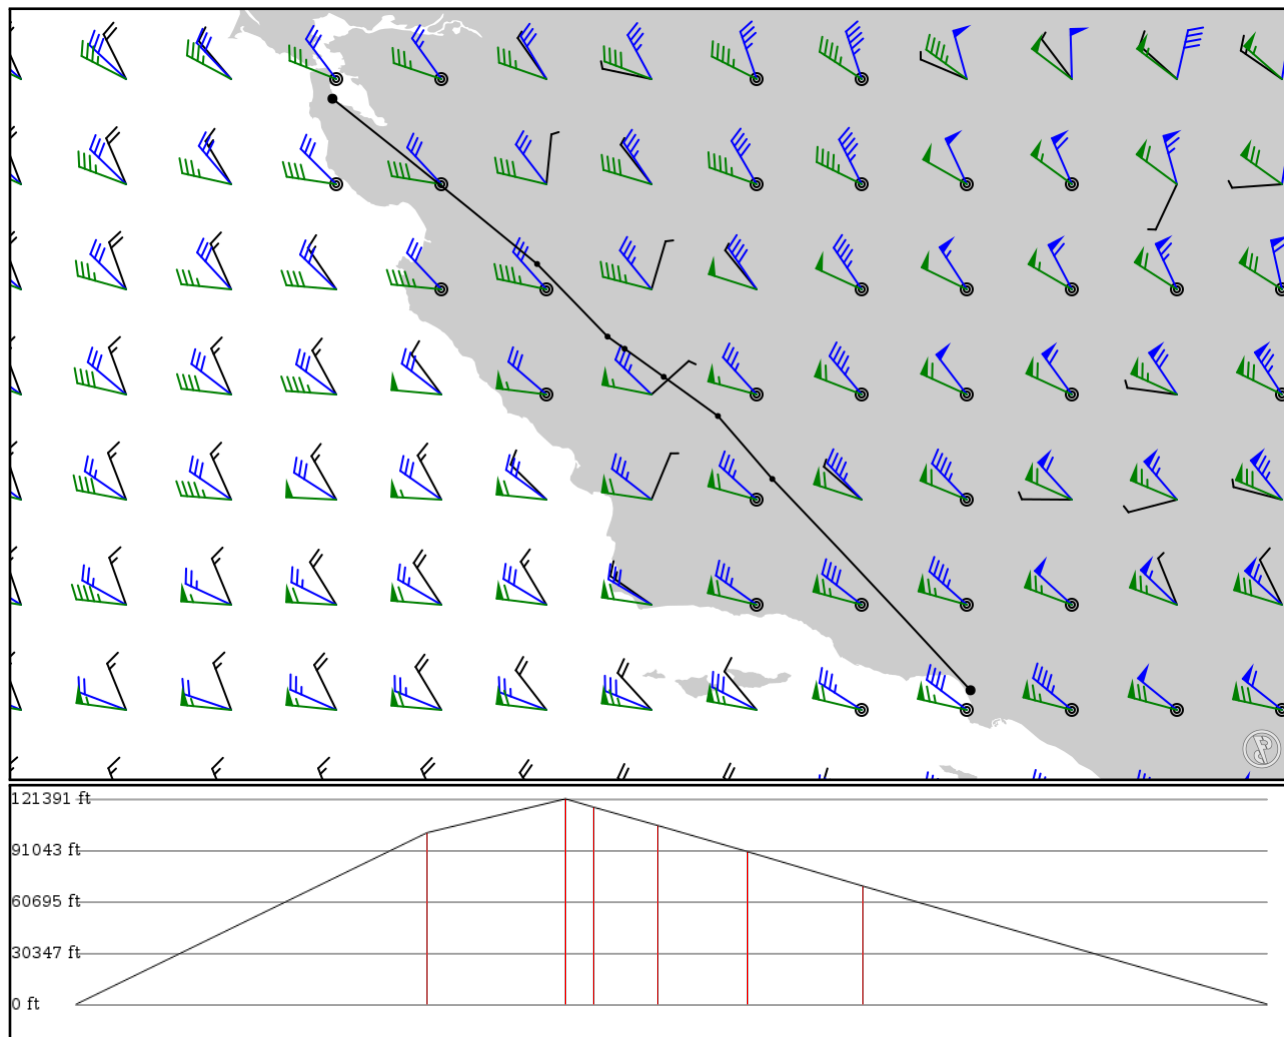

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 39000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSFO	-	37.61850	0 ft	-	San Francisco Intl
APT	-	-122.37500	0 m		
RANCK	-	36.59160	30,900 ft	86	-
FIX	-	-121.10300	9,418 m		
ROM	V485	36.14040	37,000 ft	34	PRIEST
VOR	AWY-LO	-120.66500	11,278 m		
OKEEF	V137	36.06500	35,500 ft	6	-
FIX	AWY-LO	-120.55900	10,820 m		
NEFDE	V137	35.89060	32,200 ft	15	-
FIX	AWY-LO	-120.31600	9,815 m		
AVE	V137	35.64700	27,500 ft	21	AVENAL
VOR	AWY-LO	-119.97900	8,382 m		
DERBB	J1	35.25590	21,300 ft	28	-
FIX	AWY-HI	-119.64100	6,492 m		
KLAX	-	33.94310	0 ft	99	Los Angeles Intl
APT	-	-118.40900	0 m		

```
Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4
```

Elevation: 13 ft / 4 m
Location: 37.618500 -122.375000
Magnetic Var: 12.843 E

KSFO 122356Z 31018KT 10SM FEW005 16/11 A2992 RMK A02 PK WND 29030/2322 SLP132 T01610106 10178 20156 58009 \$

TAF KSFO 122320Z 1300/1406 30016G25KT P6SM SKC FM130400 28012KT P6SM SCT006 FM130600 26008KT P6SM FEW003 BKN006 FM

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.05		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.05		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.08		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.88		0 m	136 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.441 E

METAR

KLAX 122353Z 26012G20KT 8SM SCT013 18/13 A2990 RMK A02 SLP122 T01780128 10194 20172 56013 \$

TAF

KLAX 122334Z 1300/1406 26011KT P6SM SCT012 FM130200 26006KT P6SM OVC008 FM131000 VRB03KT P6SM OVC012 FM131400 120

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m