


2024/06/04 0117Z

RKSS KAE **G597** LANAT **Y51** KARUI RJAA

681.02 nm / 1261.24 km

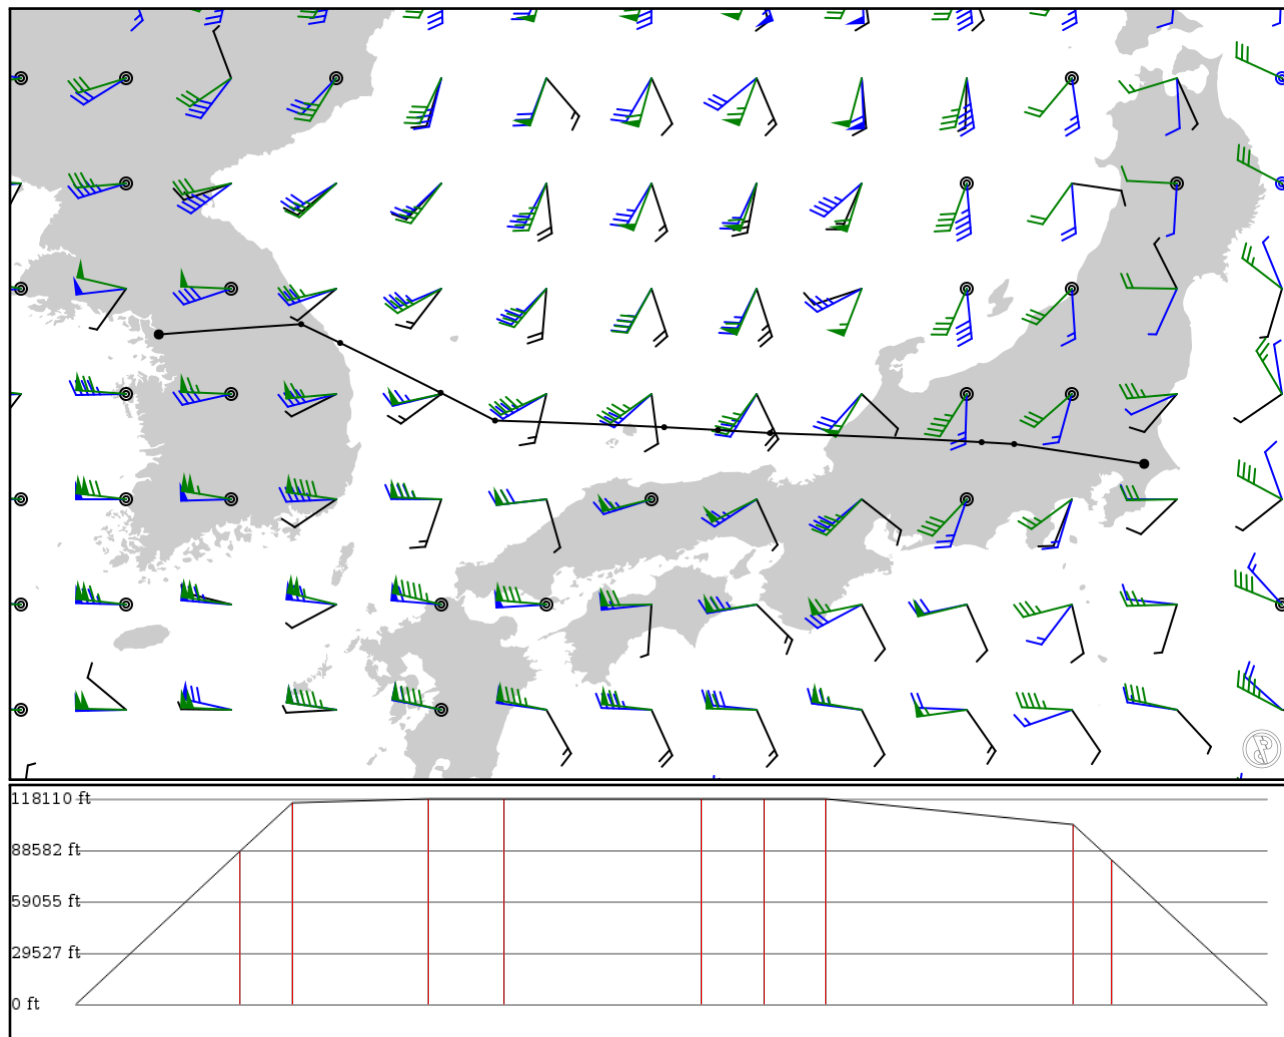

## Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 36000ft
- Cruise Speed: 420kts
- Descent Rate: 2000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RKSS	-	37.55870	0 ft	-	Seoul Gimpo
APT	-	126.79000	0 m		
KAE	-	37.70070	26,800 ft	93	GANGWON
VOR	-	128.75400	8,169 m		
PILIT	G597	37.44190	35,300 ft	29	-
FIX	AWY-HI	129.29200	10,759 m		
AGSUS	G597	36.75580	36,000 ft	78	-
FIX	AWY-HI	130.67900	10,973 m		
LANAT	G597	36.37320	36,000 ft	42	-
FIX	AWY-HI	131.42800	10,973 m		
DISSH	Y51	36.28170	36,000 ft	113	-
FIX	AWY-HI	133.76100	10,973 m		
SAMON	Y51	36.24290	36,000 ft	36	-
FIX	AWY-HI	134.50300	10,973 m		
CHILY	Y51	36.20080	36,000 ft	34	-
FIX	AWY-HI	135.22300	10,973 m		
SUWAH	Y51	36.07560	31,500 ft	141	-
FIX	AWY-HI	138.14000	9,601 m		
KARUI	Y51	36.04980	25,300 ft	21	-
FIX	AWY-HI	138.58800	7,711 m		
RJAA	-	35.77720	0 ft	88	Narita
APT	-	140.38200	0 m		

## RKSS

Region: SOUTH KOREA  
Timezone: ASIA/SEOUL  
Runways: 2

Elevation: 58 ft / 18 m  
Location: 37.558700 126.790000  
Magnetic Var: 8.851 W

## METAR

RKSS 040100Z 04002KT CAVOK 25/08 Q1016 NOSIG

## TAF

TAF RKSS 032300Z 0400/0506 10005KT CAVOK TX29/0406Z TN15/0420Z TX29/0506Z BECMG 0402/0404 28006KT BECMG 0412/0414 28006KT

## Frequencies

REC - 126.40 MHz - ATIS	CLD - 122.60 MHz - CLNC DEL
CLD - 125.85 MHz - CLNC DEL	GND - 121.90 MHz -
TWR - 127.10 MHz - SEOUL RDO	TWR - 118.10 MHz -
APP - 120.80 MHz - SEOUL APP	APP - 119.75 MHz - SEOUL APP
APP - 119.90 MHz - SEOUL APP	APP - 125.50 MHz - SEOUL APP
DEP - 125.15 MHz - SEOUL DEP	DEP - 124.80 MHz - SEOUL DEP

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14L	148 ft	11,835 ft	135.13	ASPHALT	0 ft	394 ft
	45 m	3,607 m	143.98		0 m	120 m
32R	148 ft	11,835 ft	315.14	ASPHALT	0 ft	394 ft
	45 m	3,607 m	323.99		0 m	120 m
14R	197 ft	10,515 ft	135.11	ASPHALT	0 ft	390 ft
	60 m	3,205 m	143.96		0 m	119 m
32L	197 ft	10,515 ft	315.12	ASPHALT	0 ft	384 ft
	60 m	3,205 m	323.98		0 m	117 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14R	DME	IOFR	108.70 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
32L	DME	IKMO	108.30 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
32R	DME	ISKP	110.70 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
14L	LOC-ILS	ISEL	109.90 MHz	18 nm	135.12	-	58 ft
				33 km	143.97		58 m
14R	LOC-ILS	IOFR	108.70 MHz	18 nm	135.12	-	58 ft
				33 km	143.97		58 m
32L	LOC-ILS	IKMO	108.30 MHz	18 nm	315.12	-	58 ft
				33 km	323.97		58 m
32R	LOC-ILS	ISKP	110.70 MHz	18 nm	315.14	-	58 ft
				33 km	323.99		58 m
14L	GS	ISEL	109.90 MHz	10 nm	135.12	3.00	58 ft
				19 km	143.97		58 m
14R	GS	IOFR	108.70 MHz	10 nm	135.12	3.00	58 ft
				19 km	143.97		58 m
32L	GS	IKMO	108.30 MHz	10 nm	315.12	3.00	58 ft
				19 km	323.97		58 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32R	GS	ISKP	110.70 MHz	10 nm	315.14	3.00	58 ft
				19 km	323.99		58 m

## RJAA

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 2

Elevation: 135 ft / 41 m  
Location: 35.777200 140.382000  
Magnetic Var: 7.782 W

## METAR

RJAA 040100Z 02015KT 9999 FEW025 BKN030 20/14 Q1011 NOSIG

## TAF

TAF RJAA 032314Z 0400/0506 03012KT 9999 FEW020 SCT040 TEMPO 0405/0412 03015G25KT

## Frequencies

REC - 128.25 MHz - ATIS	TWR - 122.70 MHz - NARITA TOWER
TWR - 126.20 MHz - NARITA TOWER	TWR - 118.35 MHz - NARITA TOWER
TWR - 118.20 MHz - NARITA TOWER	GND - 121.85 MHz - NARITA GROUND
GND - 121.95 MHz - NARITA GROUND	GND - 121.60 MHz - NARITA GROUND
GND - 121.75 MHz - NARITA GROUND	APP - 125.20 MHz - NARITA APPROACH
APP - 124.40 MHz - NARITA APPROACH	APP - 121.27 MHz - NARITA APPROACH
APP - 125.80 MHz - NARITA APPROACH	APP - 127.70 MHz - NARITA APPROACH
DEP - 120.60 MHz - NARITA DEPARTURE	DEP - 127.50 MHz - NARITA DEPARTURE
DEP - 119.60 MHz - NARITA DEPARTURE	DEP - 125.52 MHz - NARITA DEPARTURE
DEP - 124.20 MHz - NARITA DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16R	197 ft	13,146 ft	149.63	ASPHALT	0 ft	407 ft
	60 m	4,007 m	157.41		0 m	124 m
34L	197 ft	13,146 ft	329.64	ASPHALT	0 ft	404 ft
	60 m	4,007 m	337.42		0 m	123 m
16L	197 ft	8,210 ft	149.61	ASPHALT	0 ft	197 ft
	60 m	2,503 m	157.39		0 m	60 m
34R	197 ft	8,210 ft	329.62	ASPHALT	0 ft	0 ft
	60 m	2,503 m	337.40		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	DME	ITM	110.70 MHz	18 nm	-	-	145 ft
				33 km	-		145 m
16R	DME	IKF	111.50 MHz	18 nm	-	-	145 ft
				33 km	-		145 m
34L	DME	IYQ	111.90 MHz	18 nm	-	-	153 ft
				33 km	-		153 m
34R	DME	ITJ	110.90 MHz	18 nm	-	-	148 ft
				33 km	-		148 m
16L	LOC-ILS	ITM	110.70 MHz	18 nm	149.64	-	135 ft
				33 km	157.42		135 m
16R	LOC-ILS	IKF	111.50 MHz	18 nm	149.62	-	135 ft
				33 km	157.40		135 m
34L	LOC-ILS	IYQ	111.90 MHz	18 nm	329.62	-	135 ft
				33 km	337.40		135 m
34R	LOC-ILS	ITJ	110.90 MHz	18 nm	329.64	-	135 ft
				33 km	337.42		135 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	GS	ITM	110.70 MHz	10 nm	149.64	3.00	135 ft
				19 km	157.42		135 m
16R	GS	IKF	111.50 MHz	10 nm	149.62	3.00	135 ft
				19 km	157.40		135 m
34L	GS	IYQ	111.90 MHz	10 nm	329.62	3.00	135 ft
				19 km	337.40		135 m
34R	GS	ITJ	110.90 MHz	10 nm	329.64	3.00	135 ft
				19 km	337.42		135 m