

# PAJN

Juneau Intl


# PANC

Ted Stevens Anchorage Intl

2024/05/16 0239Z

PAJN FAKES J541 YAK J501 JOH PANC

496.99 nm / 920.43 km

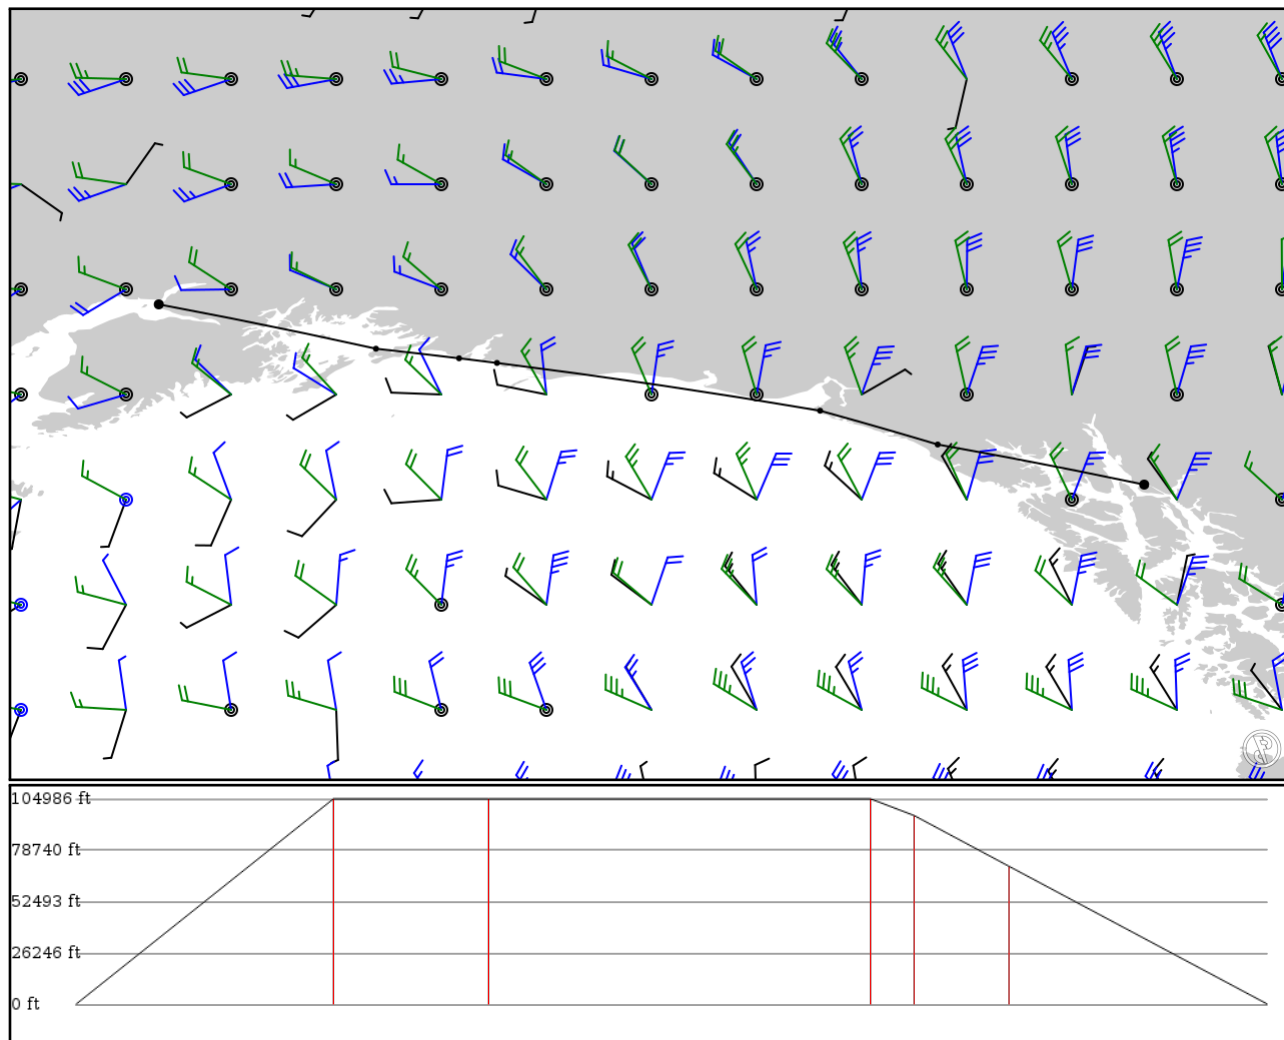

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 32000ft
- Cruise Speed: 450kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PAJN APT	-	58.35500 -134.57600	0 ft 0 m	-	Juneau Intl
FAKES FIX	-	58.98240 -137.80800	32,000 ft 9,754 m	107	-
YAK VOR	J541 AWY-HI	59.51080 -139.64800	32,000 ft 9,754 m	64	YAKUTAT
KATAT FIX	J501 AWY-HI	60.25810 -144.70500	32,000 ft 9,754 m	158	-
CASEL FIX	J501 AWY-HI	60.33110 -145.29800	29,400 ft 8,961 m	18	-
JOH VOR	J501 AWY-HI	60.48100 -146.59900	21,500 ft 6,553 m	39	JOHNSTONE POINT
PANC APT	-	61.17430 -149.99800	0 ft 0 m	107	Ted Stevens Anchorage Intl

## PAJN

Region: USA (ALASKA)  
Timezone: AMERICA/JUNEAU  
Runways: 1

Elevation: 20 ft / 6 m  
Location: 58.355000 -134.576000  
Magnetic Var: 17.273 E

## METAR

PAJN 160153Z 11006KT 10SM FEW009 BKN037 BKN100 09/04 A3001

## TAF

PAJN 152340Z 1600/1624 11008KT P6SM VCSH SCT020 OVC035 FM160600 VRB06KT P6SM BKN050

## Frequencies

TWR - 118.70 MHz - JUNEAU TOWER  
COM - 122.95 MHz - JUNEAU UNICOM

GND - 121.90 MHz - JUNEAU GROUND  
REC - 135.20 MHz - ATIS

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	8,867 ft	104.87	ASPHALT	220 ft	0 ft
	46 m	2,703 m	87.59		67 m	0 m
26	151 ft	8,867 ft	284.90	ASPHALT	217 ft	0 ft
	46 m	2,703 m	267.63		66 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IJDL	109.90 MHz	18 nm	-	-	175 ft
				33 km	-		175 m
08	LOC-LOC	IJDL	109.90 MHz	18 nm	84.92	-	21 ft
				33 km	67.65		21 m

## PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.019 E

## METAR

PANC 160153Z 27010KT 10SM FEW040 SCT200 12/01 A2996

## TAF

PANC 152323Z 1600/1706 29010KT P6SM SCT050 FM160800 18008KT P6SM SCT150 FM161200 VRB05KT P6SM BKN100

## Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.82		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.88		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.86		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.91		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.87		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.88		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.85		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.88		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.88		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.85		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.88		151 m