

# LEBL

Barcelona - El Prat

# CT4699


2024/05/23 0149Z

# EDDF

Frankfurt am Main

LEBL PPG **UZ38** MTL **A6** ROMAM **B16** PAS **UL47** PENDU **UL164** LUL **R112** OBORN EDDF

605.68 nm / 1121.72 km

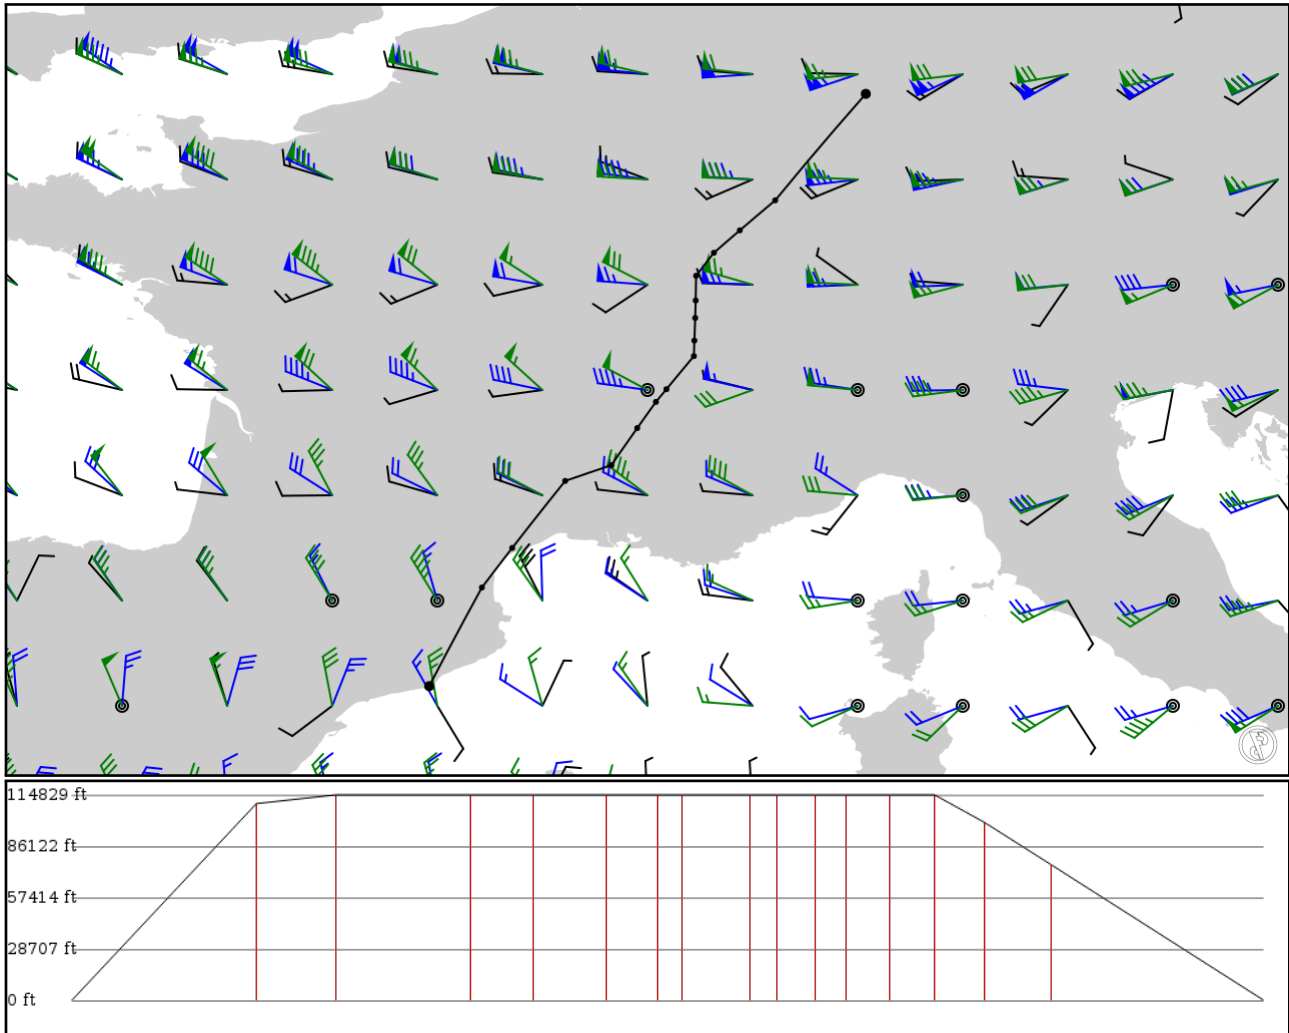

## Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LEBL APT	-	41.29511 2.08803	0 ft 0 m	-	Barcelona - El Prat
PPG VOR	-	42.75047 2.86714	33,500 ft 10,211 m	94	PERPIGNAN RIVESALTES VOR-DME
BOLSA FIX	UZ38 AWY-HI	43.33408 3.31508	35,000 ft 10,668 m	40	-
NAKIS FIX	UZ38 AWY-HI	44.32258 4.09808	35,000 ft 10,668 m	68	-
MTL VOR	UZ38 AWY-HI	44.55494 4.77986	35,000 ft 10,668 m	32	MONTE LIMAR ANCONE VOR-DME
ROMAM FIX	A6 AWY-LO	45.10278 5.16333	35,000 ft 10,668 m	36	-
LTP VOR	B16 AWY-LO	45.48897 5.43906	35,000 ft 10,668 m	25	LA TOUR DU PIN-Lyon Est VOR-DM
BELUS FIX	B16 AWY-LO	45.67528 5.59389	35,000 ft 10,668 m	12	-
PAS VOR	B16 AWY-LO	46.16369 5.99992	35,000 ft 10,668 m	33	PASSEIRY VOR-DME
MOREG FIX	UL47 AWY-HI	46.39306 6.00722	35,000 ft 10,668 m	13	-
SIROD FIX	UL47 AWY-HI	46.72694 6.01944	35,000 ft 10,668 m	20	-
ARBOS FIX	UL47 AWY-HI	46.98417 6.02639	35,000 ft 10,668 m	15	-
PENDU FIX	UL47 AWY-HI	47.34889 6.03278	35,000 ft 10,668 m	21	-
LUL VOR	UL164 AWY-HI	47.68828 6.29558	35,000 ft 10,668 m	23	LUXEUIL VOR
MIRGU FIX	R112 AWY-LO	48.01917 6.67889	30,300 ft 9,235 m	25	-
OBORN FIX	R112 AWY-LO	48.46195 7.20167	23,100 ft 7,041 m	33	-
EDDF APT	-	50.03260 8.54064	0 ft 0 m	107	Frankfurt am Main

## LEBL

Region: SPAIN  
Timezone: EUROPE/MADRID  
Runways: 3

Elevation: 14 ft / 4 m  
Location: 41.295100 2.088030  
Magnetic Var: 1.545 E

## METAR

LEBL 230130Z 33003KT 9999 FEW030 15/10 Q1017 NOSIG

## TAF

TAF LEBL 222300Z 2300/2324 33007KT 9999 FEW030 TX21/2312Z TN15/2306Z BECMG 2306/2308 08010KT PROB30 TEMPO 2303/2305 15007KT 30003KT 23000Z 33007KT 9999 FEW030 15/10 Q1017 NOSIG

## Frequencies

REC - 121.97 MHz - ATIS	REC - 118.65 MHz - ATIS
TWR - 118.32 MHz - BARCELONA TOWER	TWR - 118.10 MHz - BARCELONA TOWER
TWR - 122.82 MHz - BARCELONA TOWER	TWR - 122.10 MHz - BARCELONA TOWER
GND - 122.22 MHz - BARCELONA GROUND	GND - 121.70 MHz - BARCELONA GROUND
GND - 121.65 MHz - BARCELONA GROUND	CLD - 121.80 MHz - CLEARANCE DELIVERY
APP - 121.15 MHz - BARCELONA APPROACH	APP - 119.10 MHz - BARCELONA APPROACH
APP - 135.27 MHz - BARCELONA APPROACH	APP - 133.97 MHz - BARCELONA APPROACH
APP - 131.12 MHz - BARCELONA APPROACH	APP - 127.70 MHz - BARCELONA APPROACH
APP - 126.50 MHz - BARCELONA APPROACH	APP - 124.70 MHz - BARCELONA APPROACH
APP - 125.25 MHz - BARCELONA APPROACH	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	8,307 ft	18.91	ASPHALT	0 ft	0 ft
	45 m	2,532 m	17.37		0 m	0 m
20	148 ft	8,307 ft	198.92	ASPHALT	0 ft	226 ft
	45 m	2,532 m	197.37		0 m	69 m
07R	197 ft	8,722 ft	65.48	ASPHALT	0 ft	0 ft
	60 m	2,658 m	63.94		0 m	0 m
25L	197 ft	8,722 ft	245.50	ASPHALT	0 ft	0 ft
	60 m	2,658 m	243.96		0 m	0 m
07L	197 ft	10,984 ft	65.48	ASPHALT	1,401 ft	0 ft
	60 m	3,348 m	63.94		427 m	0 m
25R	197 ft	10,984 ft	245.50	ASPHALT	0 ft	0 ft
	60 m	3,348 m	243.96		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02	DME	BLT	108.75 MHz	25 nm	-	-	12 ft
				46 km	-		12 m
07L	DME	QAA	110.30 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
07R	DME	BLE	110.75 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
25L	DME	BLW	111.50 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
25R	DME	BCA	109.50 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
02	LOC-ILS	BLT	108.75 MHz	18 nm	18.92	-	14 ft
				33 km	17.37		14 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	QAA	110.30 MHz	18 nm	65.50	-	14 ft
				33 km	63.95		14 m
07R	LOC-ILS	BLE	110.75 MHz	18 nm	65.50	-	14 ft
				33 km	63.95		14 m
25L	LOC-ILS	BLW	111.50 MHz	18 nm	245.50	-	14 ft
				33 km	243.95		14 m
25R	LOC-ILS	BCA	109.50 MHz	18 nm	245.50	-	14 ft
				33 km	243.95		14 m
02	GS	BLT	108.75 MHz	10 nm	18.92	3.00	14 ft
				19 km	17.37		14 m
07L	GS	QAA	110.30 MHz	10 nm	65.50	3.00	14 ft
				19 km	63.95		14 m
07R	GS	BLE	110.75 MHz	10 nm	65.50	3.00	14 ft
				19 km	63.95		14 m
25L	GS	BLW	111.50 MHz	10 nm	245.50	3.00	14 ft
				19 km	243.95		14 m
25R	GS	BCA	109.50 MHz	10 nm	245.50	3.00	14 ft
				19 km	243.95		14 m

## EDDF

Region: GERMANY - CIVIL  
Timezone: EUROPE/BERLIN  
Runways: 4

Elevation: 362 ft / 110 m  
Location: 50.032600 8.540670  
Magnetic Var: 3.178 E

## METAR

EDDF 230120Z AUTO 19003KT CAVOK 09/09 Q1014 NOSIG

## TAF

TAF EDDF 222300Z 2300/2406 21004KT CAVOK PROB40 TEMPO 2312/2318 SHRA SCT040CB PROB30 TEMPO 2314/2318 TSRA TEMPO 2

## Frequencies

REC - 118.02 MHz - ATIS ARRIVAL  
GND - 121.80 MHz - GROUND  
GND - 121.70 MHz - APRON RAMP/TAXI  
GND - 121.85 MHz - APRON RAMP/TAXI  
TWR - 118.77 MHz - TOWER  
TWR - 124.85 MHz - TOWER  
TWR - 136.50 MHz - TOWER  
APP - 127.27 MHz - FRANKFURT DIRECT  
APP - 125.35 MHz - LANGEN RADAR  
APP - 120.80 MHz - LANGEN RADAR  
APP - 136.12 MHz - LANGEN RADAR

REC - 118.72 MHz - ATIS DEPARTURE  
GND - 121.65 MHz - APRON RAMP/TAXI  
GND - 121.95 MHz - APRON RAMP/TAXI  
GND - 121.75 MHz - APRON RAMP/TAXI  
TWR - 119.90 MHz - TOWER  
TWR - 127.32 MHz - TOWER  
CLD - 121.90 MHz - CLEARANCE DELIVERY  
APP - 118.50 MHz - FRANKFURT DIRECT  
APP - 126.55 MHz - LANGEN RADAR  
APP - 120.15 MHz - LANGEN RADAR  
APP - 119.02 MHz - LANGEN RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	148 ft	9,194 ft	69.56	CONCRETE	0 ft	0 ft
	45 m	2,802 m	66.39		0 m	0 m
25R	148 ft	9,194 ft	249.59	CONCRETE	0 ft	0 ft
	45 m	2,802 m	246.41		0 m	0 m
07C	197 ft	13,134 ft	69.57	ASPHALT	0 ft	203 ft
	60 m	4,003 m	66.39		0 m	62 m
25C	197 ft	13,134 ft	249.61	ASPHALT	0 ft	935 ft
	60 m	4,003 m	246.43		0 m	285 m
07R	148 ft	13,134 ft	69.59	ASPHALT	0 ft	213 ft
	45 m	4,003 m	66.41		0 m	65 m
25L	148 ft	13,134 ft	249.63	ASPHALT	0 ft	1,775 ft
	45 m	4,003 m	246.45		0 m	541 m
18	148 ft	13,083 ft	179.64	ASPHALT	0 ft	0 ft
	45 m	3,988 m	176.46		0 m	0 m
36	148 ft	13,083 ft	359.64	ASPHALT	0 ft	121 ft
	45 m	3,988 m	356.46		0 m	37 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IFNE	111.75 MHz	18 nm	-	-	357 ft
				33 km	-		357 m
25C	DME	IFCW	111.55 MHz	18 nm	-	-	364 ft
				33 km	-		364 m
25R	DME	IFNW	111.35 MHz	18 nm	-	-	357 ft
				33 km	-		357 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07C	LOC-ILS	IFCE	110.55 MHz	18 nm	69.59	-	362 ft
				33 km	66.41		362 m
07L	LOC-ILS	IFNE	111.75 MHz	18 nm	69.58	-	362 ft
				33 km	66.40		362 m
07R	LOC-ILS	IFSE	110.95 MHz	18 nm	69.61	-	362 ft
				33 km	66.43		362 m
25C	LOC-ILS	IFCW	111.55 MHz	18 nm	249.59	-	362 ft
				33 km	246.41		362 m
25L	LOC-ILS	IFSW	111.15 MHz	18 nm	249.61	-	362 ft
				33 km	246.43		362 m
25R	LOC-ILS	IFNW	111.35 MHz	18 nm	249.58	-	362 ft
				33 km	246.40		362 m
07C	GS	IFCE	110.55 MHz	10 nm	69.59	3.00	362 ft
				19 km	66.41		362 m
07L	GS	IFNE	111.75 MHz	10 nm	69.58	3.00	362 ft
				19 km	66.40		362 m
07R	GS	IFSE	110.95 MHz	10 nm	69.61	3.00	362 ft
				19 km	66.43		362 m
25C	GS	IFCW	111.55 MHz	10 nm	249.59	3.00	362 ft
				19 km	246.41		362 m
25L	GS	IFSW	111.15 MHz	10 nm	249.61	3.00	362 ft
				19 km	246.43		362 m
25R	GS	IFNW	111.35 MHz	10 nm	249.58	3.00	362 ft
				19 km	246.40		362 m